



Clad Alignment Fusion splicer 41S+ kit





ACTIVE FUSION
CONTROL TECHNOLOGY



ACTIVE BLADE
MANAGEMENT TECHNOLOGY




Enhanced Splice Quality

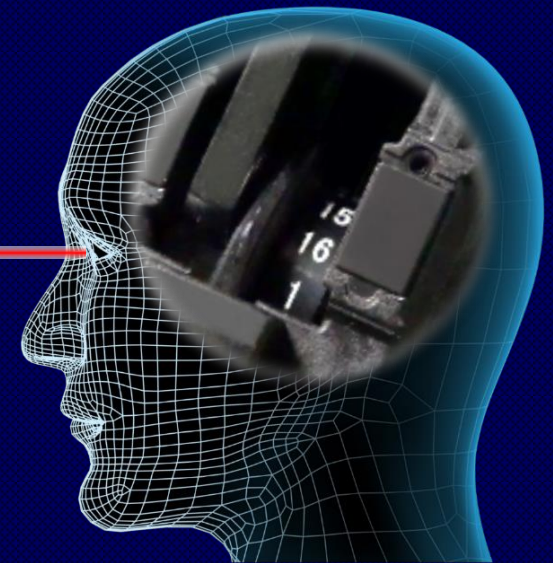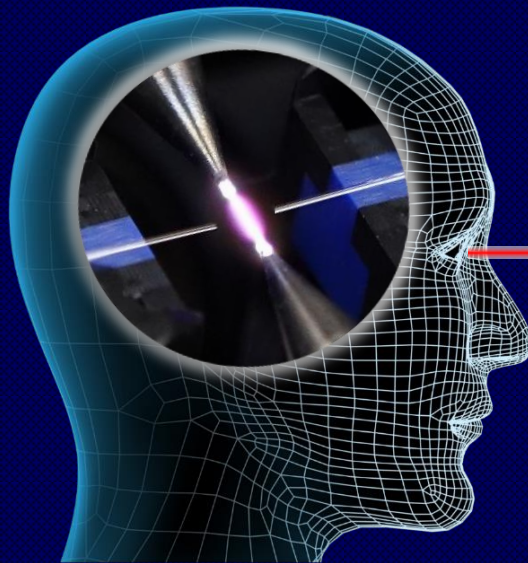

Fujikura



Active Fusion Control Technology



ACTIVE FUSION CONTROL TECHNOLOGY

1. Active Fusion control by cleave condition

One of main causes of high splice loss is bad cleave end face quality. The 41S+ analyzes the condition of both L and R cleave end faces and applies optimal fusion control. This new technology improves splice loss significantly and greatly reduces needs for rework.

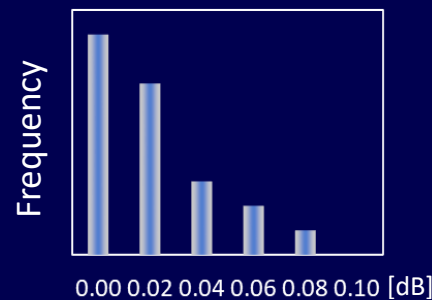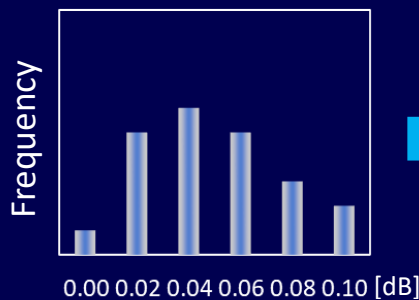


Splice loss with large cleave angle: $3 < \theta < 5$ degree


*G.652 splicing result measured by the cut-back method. Splicing results may change depending on the fiber type and fiber characteristics.

2. Active Fusion control by fiber brightness


Fusion is easily affected by changes in the environment. The 41S+ uses real-time fusion parameter control by analyzing the fiber brightness intensity during splicing. This contributes to stable, low-loss splice results.

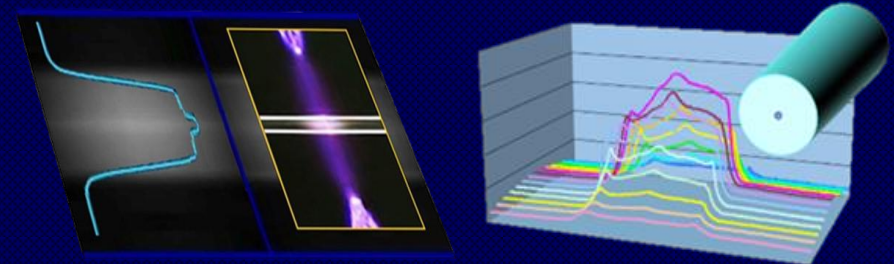

Analyzing the fiber brightness intensity

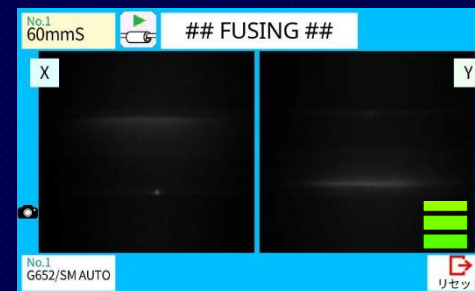


Fiber brightness: Weak

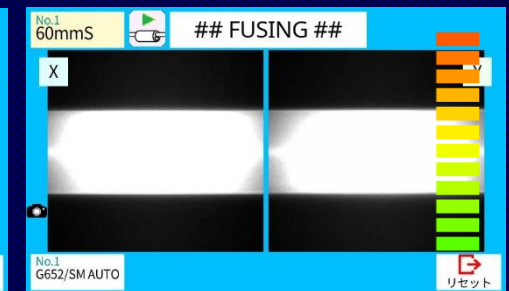

Fiber brightness: Strong


Real-time fusion control

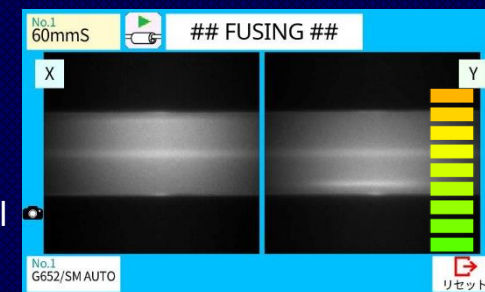

Fiber brightness: Appropriate

Real-time fusion control

Active Blade Management Technology



ACTIVE BLADE MANAGEMENT TECHNOLOGY

1. Active Blade rotation by motor

The 41S+ and CT50 fiber cleaver are equipped with wireless data connectivity. This capability allows automatic cleaver blade rotation when the 41S+ judges the blade is worn.



Motorized blade

2. Active Blade life management

The 41S+ displays the remaining blade life and informs the user when a blade height change, blade position change, or new blade is required.

No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
H(R)	0	0	0	0	0	0	0
M(D)	0	0	0	0	0	0	0
L(I)	1060	1060	0	0	0	0	0
No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
H(R)	0	0	0	0	0	0	0
M(D)	0	0	0	0	0	0	0
L(I)	0	0	0	0	0	0	0

Blade Height : L(1)

Recommended Position

Now rotating the blade.

Blade Position: 1 → 2
Blade Height: L(1)

Reset

Blade position change

No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
H(R)	0	0	0	0	0	0	0
M(D)	0	0	0	0	0	0	0
L(I)	1060	1041	1175	1167	1522	1134	1530
No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
H(R)	0	0	0	0	0	0	0
M(D)	0	0	0	0	0	0	0
L(I)	1185	1218	1025	1407	1338	1484	1259

Blade Height : L(1)

Recommended Position

Change the blade height.

L (1) → M (2)

Reset

Blade height change

No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
H(R)	1439	1530	1259	1185	1134	1575	1422
M(D)	1484	1185	1218	1025	1407	1338	1484
L(I)	1060	1041	1175	1167	1522	1134	1530
No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
H(R)	1041	1175	1167	1522	1439	1530	1218
M(D)	1422	1530	1439	1218	1375	1407	1407
L(I)	1185	1218	1025	1407	1338	1484	1259

Blade Height : L(3)

Replace

Recommended Position

Replace the cleaver blade.

O.K.

Reset

Blade replacement

Large Cleave Angle

L: 0.0°/O.K. 0.0° R: 4.1°/N.G.

Reset Continue

Now rotating the blade.

Blade Position: 1 → 2
Blade Height: L(1)


Reset

Continue

Enhanced Splice Quality

The graphs below show the number of cleaves on the horizontal line with frequency of large cleave angle, bad cleave shape and failure to cleave. When the frequency of large cleave angle or other cleave problems increases, **Active Blade** Management Technology can detect this increasing ratio of poor cleaves and rotate the blade position automatically. **Active Blade** Management Technology therefore significantly reduces the frequency of poor quality cleaves. Even when a poor cleave is detected, the 41S+ compensates by using **Active Fusion** Control Technology to apply optimized fusion to reduce the incidence of high splice loss.


By using these 2 key technologies together, the 41S+ minimizes the occurrence of high splice loss and greatly reduces the need for rework and re-splicing.

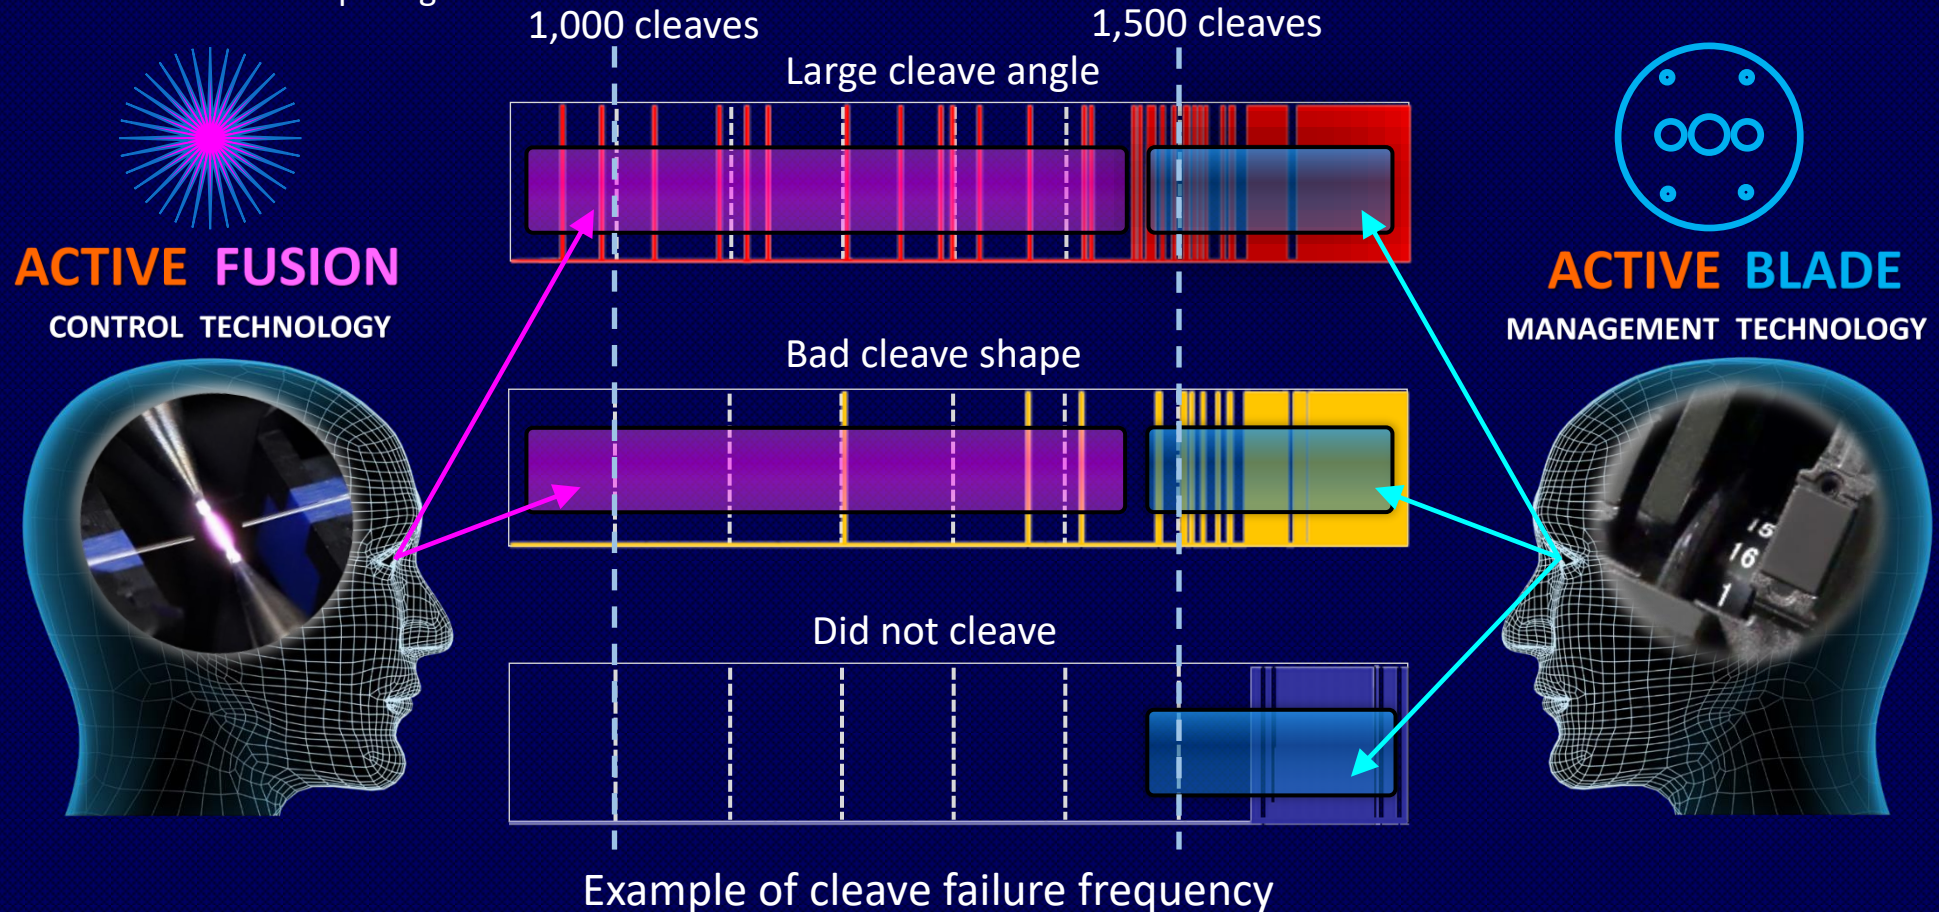

User Friendly


1. Easy Fiber Protection Sleeve Positioning

The shape of the sheath clamp is optimized for the 60mm length protection sleeve. The length from the splice point to the edge of the sheath clamp is 30mm. Therefore, it is easy to center the protection sleeve over the splice by using your finger as the reference point.

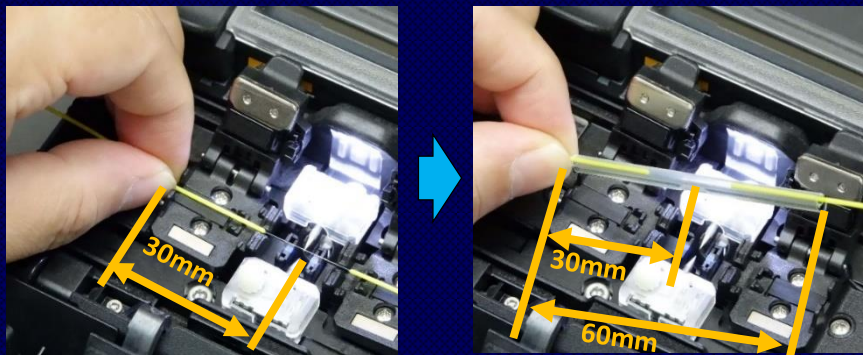

2. Universal Tube Heater

The 41S+ fusion splicer can accommodate splice sleeves with a diameter of up to 6.0mm. Therefore, it supports a wide range of protection sleeve sizes.

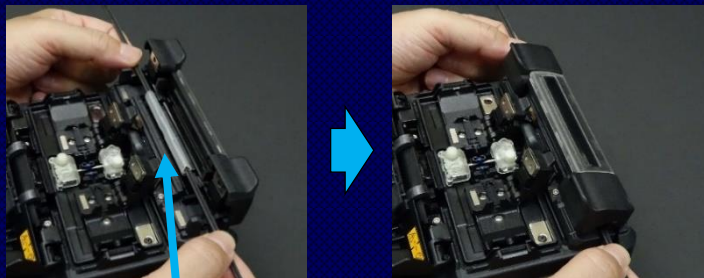

Max. 6.0mm diameter before shrinking

3. Easy replacement of consumable parts

3-1 Tool-less Electrodes replacement

The 41S+ electrodes come as an assembly including electrode mounting fixture and thumb screw. The thumb screw is easily loosened or tightened by hand without tools. This enables easy electrode replacement.



Electrodes replacement without tools

3-2 User replaceable blade and clamp arm

The CT50 fiber cleaver has a user replaceable blade and clamp arm - there's no need to send the device to a service center for blade or clamp arm replacement.



Replaceable clamp arm

Replaceable blade

4. Carrying Case

There are multiple ways to utilize the 41S+ carrying case. The 41S+ is ready to use just by opening the case, but the splicer with an included work tray can also be removed. The tray can be placed on top of the carrying case or other work surface, mounted it on a tripod, etc.


5. Work Tray

The work tray has a drawer which can slide open to expand the work area. The tray has convenient features such as a recess to lock an included alcohol dispenser in place to prevent it from falling.


Ready to use



Splicing on the Carrying Case



Expandable work tray structure



Stable aerial operation with belts

Standard Package

41S+ Standard Package



Item	Model	Qty
Clad Alignment Fusion Splicer	41S+	1 pc
(1) Battery Pack *	BTR-11A	1 pc
(2) AC Adapter	ADC-19A	1 pc
(3) AC Power Cord	ACC-08, 09, 10, 11 or 12	1 pc
(4) USB Cable	USB-01	1 pc
(5) Electrodes, for spare	ELCT2-16B	1 pair
(6) Fiber Holder Set Plate	SP-01	1 pair
(7) Carrying Case	CC-36	1 pc
(8) Work tray	WT-08	1 pc
(9) Tripod Screw	TS-03	1 pc
(10) Carrying Case Strap	ST-03	1 pc
(11) Alcohol Dispenser	AP-02	1 pc
(12) Quick Reference Guide	QRG-01-E	1 pc
Single Fiber Stripper	SS03	1 pc
Optical Fiber Cleaver	CT50	1 pc
(1) Fiber Scrap Collector	FDB-05	1 pc
(2) Fiber Setting Plate	AD-10-M24	1 pc
(3) Case	CC-37	1 pc
(4) Hexagonal Wrench	HEX-01	1 pc

* Please follow IATA regulation when shipping the battery by air.

Specifications



41S+ Specifications

Item		Specification	
Fiber alignment method		Active clad alignment	
Fiber count can be spliced		Single fiber	
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber	
	Cladding dia.	Approx. 125µm	
Applicable coating	Sheath clamp	Coating dia. : Max. 3000µm Cleave length : 5 to 16mm *1	
	Fiber splice performance	Splice loss *2	ITU-T G.652 : Avg. 0.03dB
ITU-T G.651 : Avg. 0.01dB			
ITU-T G.653 : Avg. 0.05dB			
ITU-T G.655 : Avg. 0.05dB			
		ITU-T G.657 : Avg. 0.03dB	
		Splice time *3	SM FAST mode : Avg. 6 to 7sec.
Applicable protection sleeve	Sleeve type	Heat shrinkable sleeve	
	Sleeve length	Max. 66mm	
	Sleeve dia.	Max. 6.0mm before shrinking	
Sleeve heat performance	Heat time *4	60mm mode : Avg. 25 to 27sec.	
Fiber tensile test force		Approx. 2.0N	
Electrode life *5		Approx. 5000 splices	
Physical description	Dimensions W	Approx. 131mm without projection	
	Dimensions D	Approx. 201mm without projection	
	Dimensions H	Approx. 79mm without projection	
	Weight	Approx. 1.3kg including battery	
Environmental condition	Temperature	Operate : -10 to 50 degreeC	
		Storage : -40 to 80 degreeC	
	Humidity	Operate : 0 to 95%RH non-condensing	
		Storage : 0 to 95%RH non-condensing	
Altitude	Max. 5000m		
AC adaptor	Input	AC100 to 240V, 50/60Hz, Max. 1.5A	
Battery pack	Type	Rechargeable Lithium Ion	
	Output	Approx. DC14.4V, 3190mAh	
	Capacity *6	Approx. 200 splice and heat cycles	
	Temperature	Recharge : 0 to 40 degreeC	
		Long Term Storage : -20 to 30 degreeC	
Battery life *7	Approx. 500 recharge cycles		
Display	LCD monitor	TFT 4.9 inches with touch screen	
	Magnification	Approx 132 to 300x	
Illumination	V-grooves	LED lamp	
Interface	PC	USB2.0 Mini B type	
	External LED lamp	USB2.0 A type	
	Wireless *8	Approx. DC5V, 500mA Bluetooth 4.1 LE	
Data storage	Splice mode	100 splice modes	
	Heat mode	30 heat modes	
	Splice result	10000 splices	
	Splice image	100 images	
Screw hole for tripod		1/4-20UNC	
Other features	Automatic functions	Fusion control	
	Reference guide	PDF file stored in splicer	
	Sheath clamp	Easy sleeve positioning clamp	
	Electrode	Replaceable without tool	

41S+ Options

Item	Model	Remark
Fiber Holder	FH-70-200	200µm coating diameter
	FH-70-250	250µm coating diameter
	FH-70-900	900µm coating diameter
	FH-FC-20	900µm in 2mm diameter cable
	FH-FC-30	900µm in 3mm diameter cable
Sheath Clamp	CLAMP-S31B	900µm loose buffer cable
Transfer Clamp	CLAMP-DC-12	Transferring drop cable on work tray
Protection sleeve	FP-03	60mm, Max. 900µm coating diameter
	FP-03(L=40)	40mm, Max. 900µm coating diameter
	FP-03M	FP-03 with non-magnetic material

Notes

- *1 Cleave length range depending on fiber type
5 to 16mm : 125µm cladding dia. and 250µm coating dia.
10 to 16mm : 125µm cladding dia. and 400 or 900µm coating dia.
- *2 Measured with a cut-back method relevant to ITU-T and IEC standard after splicing Fujikura identical fibers. The average splice loss changes depending on the environmental condition and fiber characteristics.
- *3 Measured at room temperature. The definition of splice time is from the fiber image appeared in LCD monitor to the estimated loss displayed. The average splice time changes depending on the environmental conditions, fiber type, and fiber characteristics.
- *4 Measured at room temperature with the AC adaptor. The heat time is defined from the start beep sound to the finish beep sound. The average heat time changes depending on the environmental conditions, sleeve type and battery pack condition.
- *5 The electrode life changes depending on the environmental conditions, fiber type and splice modes.
- *6 Test condition
(1) Splice and heat time : 1 minutes cycle
(2) Using the splicer power save settings
(3) Using a not degraded battery
(4) At room temperature
The battery capacity changes when testing with a different conditions from the above.
- *7 The battery capacity decreases to a half after approx. 500 discharge and recharge cycles. The battery life is shortened further when using outside of the storage temperature range, operating temperature range, if completely discharged by storing for a long time without recharging.
- *8 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

Specifications



CT50 Specifications

Item		Specification
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber
	Fiber count	Up to 16 fiber ribbon
	Cladding dia.	Approx. 125µm
Applicable coating	Fiber setting plate	AD-10-M24 : Max. 900µm coating diameter AD-50 : Max. 3mm coating diameter
	Fiber holder	Coating shape. : Refer to splicer options
Cleave length	Fiber setting plate	AD-10-M24 : 5 to 20mm *1 AD-50 *C.D. : coating diameter C.D. = 250µm or less : 5 to 20mm *1 250µm < C.D. < =900µm : 10 to 20mm 900µm < C.D. < =3mm : 14 to 20mm
	Fiber holder	Approx. 10mm
Cleave angle *2	Single fiber	Avg. 0.3 to 0.9 degrees
	Fiber ribbon	Avg. 0.3 to 1.2 degrees
Blade life *3		Approx. 60000 fiber cleaves
Physical description	Dimensions W	Approx. 117mm without projection *4
	Dimensions D	Approx. 94mm without projection *4
	Dimensions H	Approx. 59mm without projection *4
	Weight	Approx. 306g including battery and AD-10-M24
Environmental condition	Temperature	Operate : -10 to 50 degreeC Storage : -40 to 80 degreeC
	Humidity	Operate : 0 to 95%RH non-condensing Storage : 0 to 95%RH non-condensing
Battery		2 pieces of LR03, AAA dry battery
Wireless interface *5		Bluetooth 4.1 LE
Screw hole for tripod		1/4-20UNC
Other features	Blade rotation	Motorized rotation Manual rotation dial
	Replaceable parts	Blade
		Clamp arm

CT50 Options

Item	Model	Remark
Fiber Setting Plate	AD-50	Optional fiber setting plate
Blade	CB-08	Blade for replacement
Clamp Arm	ARM-CT50-01	Clamp arm with anvil for replacement
Fiber Scrap Collector	FDB-05	Spare scrap collector
Side cover	SC-CT50-01	Side cover instead of scrap collector
Spacer	SPA-CT08-10	Cleave length 10mm
	SPA-CT08-09	Cleave length 9mm
	SPA-CT08-08	Cleave length 8mm

Notes

- *1 When the cleave length is less than 10mm, the coating diameter should be 250µm or less. Also, a blade height adjustment is required before cleaving. The average cleave angle is worse than the specification when the cleave length is less than 10mm.
- *2 Measured with an interferometer at room temperature, not with a splicer. A new blade was used to cleave both the single fibers and ribbon fibers. The average cleave angle changes depending on the environmental conditions, blade condition, operating method, and cleanliness.
- *3 The blade life changes depending on the environmental conditions, operating method, and the fiber type cleaved.
- *4 Measured in a condition when closing the lever.
- *5 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.



Please visit our web site!

<https://www.fusionsplicer.fujikura.com>

Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan
General inquiries : +81-3-5606-1164 Service & support : +81-43-484-3962

<https://www.fujikura.com>

Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967
General inquiries, Service & support : +65-6-278-8955

<https://www.fujikura.com.sg>

Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey, KT9 2NY, UK
General inquiries : +44-20-8240-2000 Service & support : +44-20-8240-2020

<https://www.fujikura.co.uk>

AFL

260, Parkway East, Duncan, SC29334, USA
General inquiries : +1-800-235-3423 Service & support : +1-800-866-3602

<https://www.aflglobal.com>

Fujikura (China) Co., Ltd.

7th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai 200120, CHINA
General inquiries, service & support : +86-21-6841-3636
<http://www.fujikura.com.cn>