


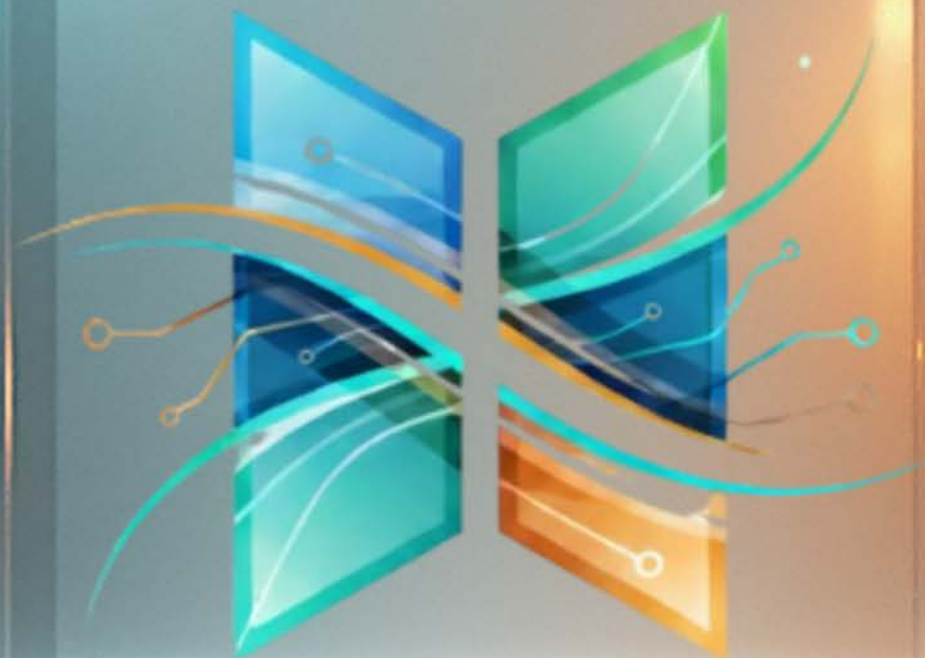

VITRO SMART

PDLC & LED GLASS

LA TECHNOLOGIE AU SERVICE DU DESIGN

www.vitrosmart.com



VITRO SMART-F


Invisible Mesh All-in-One LED Display

- 1 Plug and Play: Standard all-in-one display, powered on to auto plays, with program playing via mobile App,
- 2 Invisible Design: Invisible mesh screen, no obstruction to visibility or lighting;
- 3 Easy to Install: Preserves original space structure, supporting hanging, portable stand, and other install ways;
- 4 High Brightness: Meeting semi-outdoor applications, such as storefront windows, etc;
- 5 Floating Display: Suspended visuals with 3D holographic and naked eye AR effects.



Parameter

Pixel pitch(mm)	3.91	4.8	6.25
Resolution of module (dot)	64*307	56*298	40*192
Module size(mm)	250*1200	270*1460	250*1200
Pixel density(dots/m²)	65536	42921	25600
LED encapsulation	DH-C1717IBNR-LA	SY-ADW1415-T	DH-C1717IBNR-LA
Display size(mm)	750*1200	810*1440	750*1200
Cabinet size(mm)	771*1368 (with hanging bar) 771*1568 (with pulley)	830*1605 (with hanging bar) 830*1805 (with pulley)	771*1368 (with hanging bar) 771*1568 (with pulley)
Cabinet Weight(kg/pcs)	5.5kg/pcs	8.5kg/pcs	5kg/pcs
Working voltage(V)	DC4.6	DC4.6	DC4.6
Max.consumption(W/m²)	≤800	≤800	≤650
Ave.consumption(W/m²)	≤260	≤260	≤200
Visual Transparency (%)	≥90%	≥80%	≥90%
Brightness(CD/m²)	3500	2000	3500
Color temperature(K)	6500-9000K	6500-9000K	6500-9000K
View angle(H/V)	160°/160°	160°/160°	160°/160°
Refresh rate(Hz)	3840	1920~3840	3840
Working temperature (°C)	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C
Grey / scale (bit)	13	13	13
Protect degree(F/B)	IP20	IP20	IP20

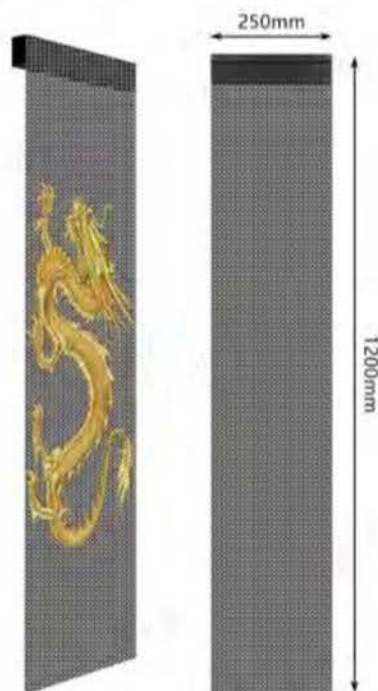

VITRO SMART-G


Invisible Mesh LED Display

1. Invisible Design: Invisible mesh screen, no obstruction to visibility or lighting;
2. Easy to Install: Preserves original space structure, supporting hanging, embedded installations;
3. Tailor Match: Customizable screen size to seamlessly integrate with store window dimensions. Etc;
4. Floating Display: Suspended visuals with 3D holographic and naked eye AR effects;
5. High Brightness: Meeting semi-outdoor applications, such as storefront windows, etc.




Parameter

Pixel pitch(mm)	3.91	4.8	6.25	3.91	6.25
Resolution of module (dot)	64*307	52*250	40*192	64*384	40*320
Module size(mm)	250*1200	250*1200	250*1200	250*1500	250*2000
Pixel density(dots/m²)	65536	43258	25600	65536	25600
LED encapsulation	DH-C1717IBNR-LA	DH-C1717IBANR-LA	DH-C1717IBANR-LA	DH-C1717IBANR-LA	RF-H2SA22HS-A47-IC3-A
Driving IC	LS9001	LS9001	LS9001	LS9001	TA8028EP
Material	Aluminum	Aluminium alloy	Aluminium alloy	Aluminum	Aluminum
Cabinet Weight(kg/pcs)	5kg/pcs	5kg/pcs	5kg/pcs	5.3kg/pcs	2kg
Working voltage(V)	DC4.6	DC4.6	DC4.6	DC4.6	DC4.6
Max.consumption(W/m²)	≤850	≤800	≤700	≤850	≤800
Ave.consumption(W/m²)	≤300	≤300	≤250	≤300	≤250
Visual Transparency (%)	≥80%	≥58%	≥90%	≥90%	≥90%
Brightness(CD/m²)	3500	≥3500	≥3500	≥3500	≥3500
Color temperature(K)	6500-9000K	6500-9000K	6500-9000K	6500-9000K	6500-9000K
View angle(H/V)	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Refresh rate(Hz)	3840	3840	3840	3840	3840
Working temperature (°C)	-20°C~+50°C	-20°C~+65°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C
Grey / scale (bit)	13	16	13	16	16
Control System	Colorlight	Colorlight	Colorlight	Colorlight	Novastar
Protect degree(F/B)	IP20	IP20	IP20	IP20	IP20

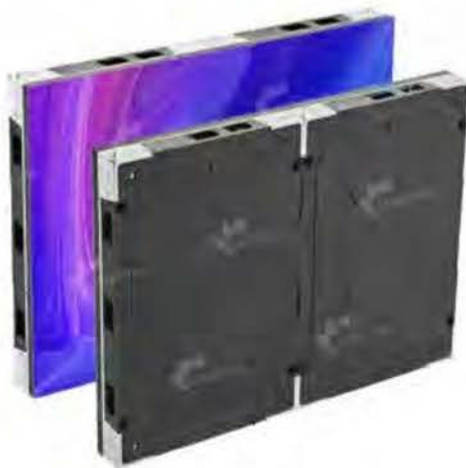

The cabinet can be quickly replaced with module of the pixel pitch from P1.25 to P4

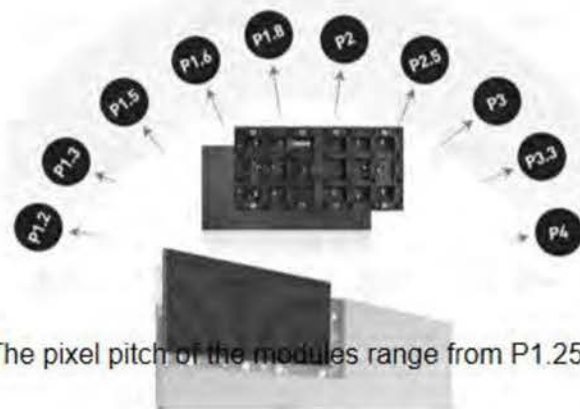

The pixel pitch of the modules range from P1.25 to P4

V-MAX

Indoor Front Maintenance Wall-mounted LED Display

1. Ready stock: Ready stock in warehouse;
2. High precision: Die-cast aluminum cabinet, high precision and good flatness;
3. Good compatibility: The cabinet can be quickly replaced with module of the pixel pitch from P1.25 to P4, and images can be upgraded to higher quality with lower cost;
4. Ultra-light and thin: Die-cast aluminum cabinet, light-weighted, thin, beautiful appearance;
5. Wall-mounted installation: modules, power supplies, and system cards can be fully maintained from the front; space-saving, suitable for high-end commercial display occasions;
6. Ratio: Can be assembled to 4:3, 16:9 large screens; the same video source ratio as LCD, and can directly replace the original LCD. Widely used in auditorium stage, conference room, banquet hall, exhibition studio, traffic command, security monitoring and other occasions.



Parameter

Pixel pitch(mm)	1.86 mm	2.5 mm
Pixel density(dots/m ²)	288906 Dots/m ²	160000 Dots/m ²
LED encapsulation	SMD1515	SMD2020
Driving method	1/43S	1/32S
Resolution of module (dot)	172*86 Dots	128*64 Dots
Module size(mm)	320*160 mm	320*160 mm
Module consumption(W)	20W	20W
Working voltage(V)	DC4.6V	DC4.6V
Max.consumption(W/m ²)	550W/m ²	5500W/m ²
Ave.consumption(W/m ²)	180W/m ²	180W/m ²
Brightness(CD/m ²)	600 CD/m ²	600 CD/m ²
Color temperature(K)	6000K-8000K	6000K-8000K
View angle(H/V)	H: 120°; V: 120°	H: 120°; V: 120°
Refresh rate(Hz)	3840Hz	3840Hz
Working temperature (°C)	-10~40°C	-10~40°C
Protect degree(F/B)	IP40	IP40
Grey / scale (bit)	14bit	14bit



V-Rent


P2.6/2.97/3.91 Stage Rental LED Screen

1. High precision cast aluminum cabinet;
2. 500*1000 ≤11.5KG/cabinet, with a thickness of only 76mm;
3. Optional curved lock, capable of splicing large screens with - 10 to 15 ° camber, 90°corner, etc;
4. Optional magnetic module can achieve complete assembly, disassembly and maintenance of the module and power supply front the front.
5. Work in silence: no fan, noise ≤ 40DB; Not affecting the on-site audio-visual effect;
6. Background large screen optimization plan; High refresh, SLR, camera 1/3000S shutter capture, no flicker, no ghost scanning line;
7. Indoor and outdoor universal pixel pitches with P2.6/2.9/3.9 ets; Specialized in providing overall LED display solutions for events, conferences, stage, product launches, and real estate.



Parameter

Pixel pitch(mm)	2.6mm	2.97mm	3.91mm
Pixel density(dots/m ²)	147456 Dots/m ²	112896 Dots/m ²	65536 Dots/m ²
LED encapsulation	SMD1515	SMD1515	SMD1921
Driving method	1/24	1/21	1/16
Resolution of module (dot)	96*96 Dots	84*84 Dots	64*64 Dots
Module size(mm)	250*250*18mm	250*250*18mm	250*250*18mm
Working voltage(V)	DC4.6V	DC4.6V	DC4.6V
Max.consumption(W/m ²)	800W/m ²	800W/m ²	800W/m ²
Ave.consumption(W/m ²)	400W/m ²	400W/m ²	400W/m ²
Brightness(CD/m ²)	4500CD/m ²	4500CD/m ²	4500CD/m ²
Color temperature(K)	3000-10000K adjustable	3000-10000K adjustable	3000-10000K adjustable
View angle(H/V)	H: 160°; V: 160°	H: 160°; V: 160°	H: 160°; V: 160°
Refresh rate(Hz)	7680Hz	7680Hz	7680Hz
Working temperature (°C)	- 10~40°C	- 10~40°C	- 10~40°C
Protect degree(F/B)	IP65	IP65	IP65
Grey / scale (bit)	16bit	16bit	16bit

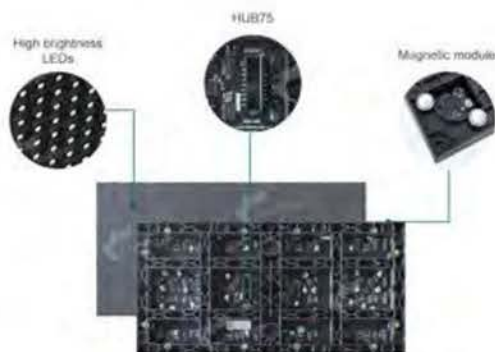

The pixel pitch of the modules range from P1.25 to P4

V-IM

Full Color Indoor LED Module

1. High-quality lamps, high lamp brightness utilization, while ensuring the service life of the lamps and high-quality plastic parts;
2. High reach can achieve good display effects;
3. Light weight, easy to install and sensitive;
4. Single point and single lamp maintenance is possible with low cost
5. Using constant current mode to drive LED, the light is uniform and the power consumption is low.



Parameter

Pixel pitch(mm)	1.86 mm	2.5 mm
Pixel density(dots/m ²)	288906 Dots/m ²	160000 Dots/m ²
LED encapsulation	SMD1515	SMD2020
Driving method	1/43S	1/32S
Resolution of module (dot)	172*86 Dots	128*64 Dots
Module size(mm)	320*160 mm	320*160 mm
Module consumption(W)	20W	20W
Working voltage(V)	DC4.6V	DC4.6V
Max.consumption(W/m ²)	550W/m ²	5500W/m ²
Ave.consumption(W/m ²)	180W/m ²	180W/m ²
Brightness(CD/m ²)	600 CD/m ²	600 CD/m ²
Color temperature(K)	6000K-8000K	6000K-8000K
View angle(H/V)	H: 120°; V: 120°	H: 120°; V: 120°
Refresh rate(Hz)	3840Hz	3840Hz
Working temperature (°C)	-10~40°C	-10~40°C
Protect degree(F/B)	IP40	IP40
Grey / scale (bit)	14bit	14bit



V-MagicStage

Flexible Transparent LED Screen

1. V1 flame retardant ensure high safety, low smoke and self-extinguishing;
2. P15/P20: $\geq 50\%$ transmittance;
3. P10: 40% to ensure ventilation safety;
4. P6.25: higher resolution, suitable for creating immersive holographic visual effects;
5. Free-form sharpening and cutting;
6. Less than 1.3KG/m^2 and less than 4mm thick; 90m^2 in 1 CBM;
7. Magic blanket can achieve 16-bit grayscale.



Parameter

	P6.25	P10	P15	P20
Density	25,600dots/m²	10,000dots/m²	4,356dots/m²	2,500dots/m²
Brightness	1000nits	600nits	1200/2000nits	800/1800nits
Transmittance	4%	40%	67%	75%
Power	1100W/m², 430W/m²	400W/m², 160W/m²	300W/m², 120W/m²	130W/m², 40W/m²
Product Form	Mesh weaving			
Color	Full Color			
Gray Grade	16bit			
Working Voltage	DC5V (DC12V optional)			
Video Format	MP4 / MKV / AVI / MOV / 3GP			
Image Format	JPEG / GIF / BMP / PNG			
Protection Grade	IP43		IP65	
Lifespan	50000 hours			
Control System	Redfive / Novastar			
Working Temperature	-20°C ~ 50°C			
Storage Temperature	-40°C ~ 60°C			
Storage Humidity	P6.25/P10: Relative Humidity ≤60%; P15/P20: Relative Humidity ≤85%			
Usage Environment	P6.25/P10: Indoor ; P15/P20: Indoor and Outdoor			
Certificate	CE / RoHS / FCC			



V-MagicSky

Flyable LED Display

1. Energy-efficient with smart control: APP/PC, WIFI/4G;
2. Multi-pieces splicing technology;
3. Customizable sizes for versatile applications;
4. 90m² in 1 CBM, flexible and rollable, easy to transport;
5. ≤1.2kg/m² weight, ≤4mm thick, ultra-light and ultra-thin for seamless flight;
6. Up to 70% high transparency and wind permeability.



Parameter

Flyable LED Screen on Drone Specification	P15	P20	P25
Density	4356dots/m ²	2500dots/m ²	1600dots/m ²
Brightness	1200nits	800nits	500nits
Power Consumption	100W/m ² , 30W/m ²	60W/m ² , 24W/m ²	40W/m ² , 20W/m ²
Product Form	Mesh weaving		
Color	Full Color		
Gray Grade	16bit		
Working Voltage	DC5V (DC12V optional)		
Video Format	MP4 / MKV / AVI / MOV / 3GP		
Image Format	JPEG / GIF / BMP / PNG		
Protection Grade	IP54		
Lifespan	50000 hours		
Control System	Redfive / Novastar		
Working Temperature	-20°C ~ 50°C		
Storage Temperature	-40°C ~ 60°C		
Storage Humidity	Relative Humidity ≤85%		
Usage Environment	Indoor (Outdoor in the night)		
Certificate	CE / RoHS / FCC		

Parameter

RF5 Drone Specification	RF5 E10	RF5 E15	RF5 E25	RF5 E35	RF5 E50
No-load Endurance	Max 40mins	Max 40mins	Max 40mins	Max 40mins	Max 40mins
Load Endurance	About 10~20mins	About 10~20mins	About 10~20mins	About 10~20mins	About 10~20mins
Flight Speed	80km/hour	80km/hour	100km/hour	100km/hour	100km/hour
Hovering Accuracy	0.35m	0.35m	0.35m	0.35m	0.35m
Max Size	1115*1230*450mm	1365*1505*500mm	1780*1960*550mm	2190*2415*600mm	2650*2915*700mm
Folded Size	400*400*450mm	400*400*450mm	650*650*550mm	750*750*600mm	900*900*700mm
Load Capacity	10kg	15kg	25kg	35kg	50kg
Suggested Magicsky Size (H/V)	Popular size: 2*4m or less than 8sqm	Popular size: 3*4m or less than 12sqm	Popular size: 3*6m or less than 20sqm	Popular size: 4*8m or less than 32sqm	Popular size: 4*10m or less than 40sqm
Suggested Pixel Pitch	P15	P15	P20	P20	P20/25



V-Fit

Outdoor HD LED Display

1. Adopting a new structural design, lightweight, beautiful and no deformation, easy and flat assemble;
2. Brightness 6000CD/m², the picture is still clear under strong light;
3. The cabinet is adapted to P2.5~P16 modules, no need to change the cabinet for upgrade, saving manpower and cabinet costs;
4. IP65 protection grade; good sealing, cost-effective;
5. Integrally formed;
6. Ultra-thin and light.



Parameter

Pixel pitch(mm)	4	5	6.67	8	10	10
Pixel density(dots/m ²)	62500	40000	22477	15625	10000	10000
LED encapsulation	SMD1921	SMD1921	SMD3535	SMD3535	SMD3535	DIP346
Driving method	1/10	1/8	1/6	1/4	1/2	1/4
Resolution of module (dot)	80*40	64*32	48*24	40*20	32*16	32*16
Module size(mm)	320*160	320*160	320*160	320*160	320*160	320*160
Module consumption(W)	16	16	16	16	16	12
Working voltage(V)	DC5	DC5	DC5	DC5	DC5	DC5
Max.consumption(W/m ²)	720	720	720	720	720	720
Ave.consumption(W/m ²)	240	240	240	240	240	200
Brightness(CD/m ²)	5000	5000	5500	5000	6000	4500
Color temperature(K)	8500	8500	8500	8500	8500	8500
View angle(H/V)	170°/120°	170°/120°	170°/120°	170°/120°	170°/120°	170°/120°
Refresh rate(Hz)	1920	1920	1920	1920	1920	1920
Working temperature (°C)	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C
Protect degree(F/B)	IP65	IP65	IP65	IP65/IP54	IP65/IP54	IP65/IP54
Grey / scale (bit)	14	14	14	14	14	14

Taxi Top Double sided LED Screen

V-Taxi



1. The shell is made of cast aluminum and transparent board, and it is installed in an inverted style, which has good rainproof effect;
2. The exterior of the screen adopts a bright surface spraying process, which can be well matched with the car paint;
3. There is a hole at the bottom of the screen for installation with the roof bracket for easy installation;
4. Using DC to DC wide voltage 9 to 36 volt power supply, which can be used by almost all cars;
5. The screen body comes with a delayed start-up function, which does not affect the start of the car;
6. Accurate and efficient with Global GPS fixed-point placement;
7. Wireless control with mobile phone and pad, and the operation interface is simple and practical;
8. Real-time monitoring of the screen;
9. Full color cloud sending Android system architecture, Full Netcom 4G communication;
10. Ali Cloud in-vehicle TAXI_HUB dedicated platform service escorts you in-vehicle interconnection;
11. Standard WiFi module, support platform hotspot Internet access, car hotspot Internet access;
12. Support third-party APP, platform, microservice docking, safe, efficient and reliable;
13. Traffic trajectory, mileage, advertising log statistics, graphical and intuitive.



Parameter

Pixel pitch(mm)	2.5mm	3.076mm	3.33mm	4mm	5mm
Pixel density(dots/m ²)	160000 Dots/m ²	105625 Dots/m ²	90000 Dots/m ²	64000 Dots/m ²	40000 Dots/m ²
LED encapsulation	SMD1415	SMD1415	SMD1921	SMD1921	SMD1921
Driving method	1/16S	1/13S	1/12S	1/10S	1/8S
Resolution of module (dot)	128*64Dots	104*52Dots	96*48Dots	80*40Dots	64*32Dots
Module size(mm)	320mm*160mm	320mm*160mm	320mm*160mm	320mm*160mm	320mm*160mm
Module consumption(W)	12W	14W	7.5/15W	7.5/12W	7.5/12W
Working voltage(V)	DC5V	DC5V	DC5V	DC5V	DC5V
Max.consumption(W/m ²)	421W/set	486W/set	300/480W/set	300/480W/set	300/480W/set
Ave.consumption(W/m ²)	150W/set	160W/set	90/162W/set	90/144W/set	90/144W/set
Brightness(CD/m ²)	4500 CD/m ²	4500 CD/m ²	4500 CD/m ²	4500 CD/m ²	4500 CD/m ²
Color temperature(K)	6000k-8000k	6000k-8000k	6000k-8000k	6000k-8000k	6000k-8000k
View angle(H/V)	H: 170°; V: 120°	H: 170°; V: 120°	H: 170°; V: 120°	H: 170°; V: 120°	H: 170°; V: 120°
Refresh rate(Hz)	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
Working temperature (°C)	-20~60°C	-20~60°C	-20~60°C	-20~60°C	-20~60°C
Protect degree(F/B)	IP65	IP65	IP65	IP65	IP65
Grey / scale (bit)	≥13bit	≥13bit	≥13bit	≥13bit	≥13bit



V-Taxi-A

Taxi Roof Double-sided LED Display

1. 4G full network wireless communication;
2. Wirelessly broadcast text, pictures, videos and other advertising content in groups;
3. Low power consumption: Energy-saving circuit design reduces power consumption without affecting the overall display effect;
4. High brightness: Brightness up to 5000 CD/m², The brightness adjustment function can set the brightness value of the display in time periods in the background to maintain the best display effect of the display at all times;
5. PC has high shock proof and high toughness, high heat and cold resistance, corrosion resistance, and high transparency;
6. After frosting, it can prevent glare and does not affect direct viewing under the sun.



Parameter

Pixel pitch(mm)	2.5mm	3.3mm	5mm
Resolution of module (dot)	384*128	288*96	192*64
Module size(mm)	300*300	300*300	300*300
Display size(mm)	960*320	960*320	960*320
Cabinet size(mm)	1106*408*141	1106*408*141	1106*408*141
Ave.consumption(W/m ²)	150	150	150
Brightness(CD/m ²)	4500	4500	4500
View angle(H/V)	160°	160°	160°
Refresh rate(Hz)	5120	5120	5120
Weight(KG)	17.2	17.2	17.2
Working temperature (°C)	-20 ~50°C	-20 ~50°C	-20 ~50°C
Protect degree(F/B)	IP65	IP65	IP65
Grey / scale (bit)	16bit	16bit	16bit



V-Taxi-B

Taxi Roof Double-sided LED Display

1. 4G full network wireless communication;
2. Wirelessly broadcast text, pictures, videos and other advertising content in groups;
3. Low power consumption: Energy-saving circuit design reduces power consumption without affecting the overall display effect;
4. High brightness: Brightness up to 5000 CD/m², The brightness adjustment function can set the brightness value of the display in time periods in the background to maintain the best display effect of the display at all times;
5. PC has high shock proof and high toughness, high heat and cold resistance, corrosion resistance, and high transparency;
6. After frosting, it can prevent glare and does not affect direct viewing under the sun.



Parameter

Pixel pitch(mm)	2.5mm	3.3mm	5mm
Resolution of module (dot)	384*128	288*96	192*64
Module size(mm)	300*300	300*300	300*300
Display size(mm)	960*320	960*320	960*320
Cabinet size(mm)	1106*408*141	1106*408*141	1106*408*141
Ave.consumption(W/m ²)	150	150	150
Brightness(CD/m ²)	4500	4500	4500
View angle(H/V)	160°	160°	160°
Refresh rate(Hz)	5120	5120	5120
Weight(KG)	17.2	17.2	17.2
Working temperature (°C)	-20 ~50°C	-20 ~50°C	-20 ~50°C
Protect degree(F/B)	IP65	IP65	IP65
Grey / scale (bit)	16bit	16bit	16bit

V-Taxi-C

Taxi Roof Double-sided LED Display



1. 4G full network wireless communication;
2. Wirelessly broadcast text, pictures, videos and other advertising content in groups;
3. Low power consumption: Energy-saving circuit design reduces power consumption without affecting the overall display effect;
4. High brightness: Brightness up to 5000 CD/m², The brightness adjustment function can set the brightness value of the display in time periods in the background to maintain the best display effect of the display at all times;
5. PC has high shock proof and high toughness, high heat and cold resistance, corrosion resistance, and high transparency;
6. After frosting, it can prevent glare and does not affect direct viewing under the sun.



Parameter

Pixel pitch(mm)	2.5mm	3.3mm	5mm
Resolution of module (dot)	384*128	288*96	192*64
Module size(mm)	300*300	300*300	300*300
Display size(mm)	960*320	960*320	960*320
Cabinet size(mm)	1106*408*141	1106*408*141	1106*408*141
Ave.consumption(W/m ²)	150	150	150
Brightness(CD/m ²)	4500	4500	4500
View angle(H/V)	160°	160°	160°
Refresh rate(Hz)	5120	5120	5120
Weight(KG)	17.2	17.2	17.2
Working temperature (°C)	-20 ~50°C	-20 ~50°C	-20 ~50°C
Protect degree(F/B)	IP65	IP65	IP65
Grey / scale (bit)	16bit	16bit	16bit



V-Box

Take Away LED Screen Box

1. FRP fiberglass cabinet, waterproof rubber pad for seal, moisture-proof;
2. Oxidized surface without rust or corrode;
3. Specially designed reinforced shock-proof structure and heat dissipation structure;
4. Suitable for complex road conditions. Ensure the installation strength;
5. Special shockproof & heat dissipation structural design;
6. Suitable for complex road conditions.



Parameter

Pixel pitch(mm)	4mm	3mm
Resolution of module (dot)	80*96	112*128
Module size(mm)	320*384	336*384
Display size(mm)	160*160	160*160
Cabinet size(mm)	500*500*500	500*500*500
Ave.consumption(W/m ²)	50	50
Brightness(CD/m ²)	5000	5000
View angle(H/V)	160°	160°
Refresh rate(Hz)	1920	1920
Weight(KG)	16	16
Working temperature (°C)	-20 ~50°C	-20 ~50°C
Protect degree(F/B)	IP65	IP65
Grey / scale (bit)	16bit	16bit



V-Poster-Fold

Foldable Splicing Advertising Poster LED Display

1. Innovative folding design, space-saving;
2. Plug and Play, no any installation needed;
3. 6 units, 5-minute seamless setup;
4. GOB protection tech, durable and low maintenance;
5. Strong compatibility, support APP, wireless and cloud control.



Parameter

Pixel pitch(mm)	2.5	2.5
Pixel density(dots/m²)	196608	196608
LED encapsulation	SMD2020	SMD2020
Driving method	1/32	1/64
Resolution of module (dot)	128*64	128*64
Module size(mm)	320*160	320*160
Display Area(mm)	640*1920	640*1920
OverallArea(mm)	650*1930*55	650*1930*55
Max.consumption(W/m²)	≤500	≤500
Ave.consumption(W/m²)	≤150	≤150
Brightness(CD/m²)	600	600
Color temperature(K)	6000~8000	6000~8000
View angle(H/V)	140°/110°	140°/110°
Refresh rate(Hz)	3840	3840
Working temperature (°C)	-20~60°C	-20~60°C
Protect degree(F/B)	IP40	IP40
Grey / scale (bit)	≥14	≥14
Material	Die-casting Aluminum	Die-casting Aluminum



V-Kinetic

Kinetic LED Matrix Screen

1. A huge customized LED wall made of hundreds of LED modules controls max 5000pcs display unit. The units to slide for ward then back respectively according to the video content. The user is able to make infinite creativity design to present an excellent 3D visual effect;
2. High-definition display Kinetic LED matrix screen adopts high-brightness LED lamp beads, which has the characteristics of high brightness, high contrast and high resolution, making the display effect more vivid and clear;
3. Adjustable motion mode: Kinetic LED matrix screen can be controlled by the motion software system to realize the expansion and contraction of the matrix screen, and the screen content and mechanical linkage can be realized according to actual needs;
4. Easy installation and maintenance: Easy installation and maintenance: Kinetic LED matrix screen adopts a modular design, which is easy to install, and the modules can be disassembled and replaced, which is convenient for maintenance.



Parameter

Pixel pitch(mm)	1.9mm	2.5mm
Single Matrix Size(mm)	250*250	250*250
Matrix Resolution(dot)	128*128	100*100
Gaps Between Matrices(mm)	2	2
Max Forward stroke(mm)	200	200
Max Forward Speed(mm/s)	300	300
Cabinet Size(mm)	504x504(2x2)	504x504(2x2)
Cabinet Thickness(mm)	380	380
Cabinet Weight(KG)	26	26
Screen Brightness(cd/m2)	600-800	600-800
Refresh Rate(Hz)	3840	3840



V-Art

LED Art Screen

1. One screen for two purposes, never black screen;
2. Excellent Quality: LED painting screen is suitable for indoor and outdoor installation environment, resistant to high temperature, moisture and light;
3. High Customization: Any color and pattern can be customized, including solid color panels, logos, paintings, graffiti, etc;
4. High-definition Quality: The required resolution is 72-150 pixels/inch. The higher the pixel of the customized image, the more vivid and clear the display effect will be, and the better the engraved finished image effect will be;
5. Multiple Scenes: It can be used as a corporate decorative back around wall indoors and as a multifunctional simulated landscape decoration outdoors. It can also switch the screen display according to different scene requirements.



Parameter

Application Environment	Box Size	Art Screen Model	Art Screen Panel	Refresh Rate
Indoor	Custom Made	P1.9	320*160mm	≥3840
		P2.5	320*160mm	≥3840
		P3	320*160mm	≥3840
		P4	320*160mm	≥3840
Outdoor	Custom Made	P3	320*160mm	≥3840
		P4	320*160mm	≥3840
		P5	320*160mm	≥3840
		P6	320*160mm	≥3840
		P8	320*160mm	≥3840
		P10	320*160mm	≥3840



V-Rotation

LED Mechanical Rotating Screen

1. **Attention-Grabbing:** The rotating design attracts pedestrians and viewers, increasing ad exposure;
2. **Flexible Viewing Angles:** They can showcase content from multiple angles, ideal for large events or crowded places;
3. **Space-Efficient:** They can display more content in limited spaces compared to traditional static screens;
4. **Dynamic Effects:** The motion adds visual energy, effectively conveying brand vitality and innovation;
5. **High Brightness and Contrast:** LED technology ensures bright images, maintaining clarity even in strong light;
6. **Durability:** LED screens typically have a long lifespan and high impact resistance, suitable for outdoor and harsh environments;
7. **Energy Efficiency:** LED displays usually consume less power, making them more environmentally friendly than traditional display technologies.



Parameter

	P1.8	P2	P2.5	P4	P5
Model	P1.8	P2	P2.5	P4	P5
Pixel Pitch(mm)	1.8mm	2mm	2.5mm	4mm	5mm
LED Type	SMD1515	SMD1515	SMD2020	SMD1921	SMD2727
Application Environment	Indoor	Indoor	Indoor	Outdoor	Outdoor
Pixel(m ²)	284444	250000	160000	62500	40000
Module size(mm)	320mm*160mm	320mm*160mm	320mm*160mm	320mm*160mm	320mm*160mm
LED Panel Size	Customize	Customize	Customize	Customize	Customize
Refresh rate(HZ)	≥3840	≥3840	≥3840	≥3840	≥3840
Cabinet Size	Customize	Customize	Customize	Customize	Customize
Brightness	800cd*1000cd	800cd*1000cd	800cd*1000cd	800cd*1000cd	800cd*1000cd
Brightness(CD/m ²)	≤240	≤220	≤230	≤260	≤260
Avg Power(w/m ²)	≤660	≤650	≤640	≤750	≤750
Maintenance Method	Front	Front	Front	Front	Front
Waterproof Level	IP32	IP32	IP32	IP65	IP65
Input Voltage	AC100V-240V	AC100V-240V	AC100V-240V	AC100V-240V	AC100V-240V
Life Span	100,000 hours	100,000 hours	100,000 hours	100,000 hours	100,000 hours



V-KS

Kinetic LED Spherical Screen

1. 360-Degree Viewing: The spherical design allows content to be viewed from all angles, enhancing visual impact for viewers;
2. Attention-Grabbing: Its unique shape and dynamic effects quickly attract attention, improving advertising effectiveness;
3. Strong Interactivity: They can engage audiences interactively, enhancing participation, especially in events, exhibitions, and malls;
4. Diverse Content Display: Capable of showcasing videos, animations, and real-time data, providing a rich visual experience;
5. Weather Resistance: Typically designed for durability, making them suitable for outdoor use in harsh conditions with a long lifespan;
6. Space-Efficient: The spherical design creates significant visual impact in limited spaces, ideal for urban environments and high-traffic areas;
7. Energy Efficiency: LED technology is low in energy consumption, helping reduce long-term operational costs.



Parameter

Mechanical Structure	Motor Mode	Telescopic Speed	telescopic Length	Sport Control
Parameter	Servo motor	100mm/s	250mm	Software
Model	P2.5		P2	
Pixel Pitch(mm)	2.5		2	
Diameter(m)	1.5		1.5	
LED Type	SMD1515		SMD1515	
Pixel Density(dot/m²)	160000		250000	
Avg Power(w/m²)	180		180	
Maximum Power(w/m²)	550		550	
Refresh Rate(HZ)	≥3840		≥3840	
Input Voltage	AC100-240V, 50-60Hz			
Life Span	100,000			



V-Slim

10000 level brightness | Wall-mounted | Front and rear maintenance | IP65

1. High safety: All-aluminum bottom shell, high ignition point, high fire rating, can be certified by TUV 5VB fire test. Specially designed waterproof ring, multi-layer waterproof protection, protection grade up to IP65;
2. High stability: All-aluminum material, dense corrugated heat sink design, high heat dissipation efficiency; Partial voltage power supply design, low heat, long life span; Hard connection design, high stability;
3. High performance: Innovative circuit design, high brightness efficiency, can achieve 10000 cd/m²;
4. High convenience: Can be installed against the wall, with full front and rear maintenance design, convenient installation and saving installation space; Light-weighted design, the weight can be as light as 30kg/m², and the thickness can be as thin as 77mm; Modules can be interchanged left and right to reduce maintenance costs;
5. High contrast: The innovative design mask improves the contrast, with the brim height of 2.5mm; The mask has high accuracy, low tolerance and no module.

Support curved splicing



40x 320mm small module,
80° beveled edge, supporting
curved splicing

Support right angle
corner splicing



The module is equipped with
beveled edges as standard and
supports right-angle splicing



Parameter


Pixel pitch(mm)	5.7mm	6.67mm	8mm	10mm
Pixel density(dots/m ²)	30625 Dots/m ²	22500 Dots/m ²	15625Dots/m ²	10000Dots/m ²
LED encapsulation	SMD2727	SMD2727	SMD2727	SMD2727
Driving method	1/7	1/6	1/4	1/2
Resolution of module (dot)	84*56Dots	72*48Dots	60*40Dots	48*32Dots
Module size(mm)	480*320mm	480*320mm	480*320mm	480*320mm
Module consumption(W)	≤95W	≤95W	≤95W	≤95W
Working voltage(V)	DC3.2/4.2V	DC3.2/4.2V	DC3.2/4.2V	DC3.2/4.2V
Max.consumption(W/m ²)	≤650W/m ²	≤650W/m ²	≤650W/m ²	≤650W/m ²
Ave.consumption(W/m ²)	≤200W/m ²	≤200W/m ²	≤200W/m ²	≤200W/m ²
Brightness(CD/m ²)	>6500 CD/m ²	>6500 CD/m ²	>6500 CD/m ²	>6500 CD/m ²
Color temperature(K)	6000K-8000K	6000K-8000K	6000K-8000K	6000K-8000K
View angle(H/V)	H:140°; V:140°	H:140°; V:140°	H:140°; V:140°	H:140°; V:140°
Refresh rate(Hz)	≥3840Hz	≥3840Hz	≥3840Hz	≥3840Hz
Working temperature (°C)	-20 ~50°C	-20 ~50°C	-20 ~50°C	-20 ~50°C
Protect degree(F/B)	IP65	IP65	IP65	IP65
Grey / scale (bit)	14bit	14bit	14bit	14bit



V-Rent-H


P2.6/2.97/3.91 Rental Stage LED Display

1. High flatness: ADC12 high-strength die-cast aluminum cabinet, can be frequently assembled and disassembled without deformation, high flatness;
2. Practical: The extremely simple and practical design, firm handle, convenient fast lock, the simplest and most practical;
3. High reliability: fully enclosed module, front and rear IP65, high stability;
4. Multiple shape: 500*500/1000mm cabinet; accessible to mixed assembly; Arc model can assemble to -6° to 6° arc screen, 90° Angle, column and other large screens;
5. Cost-effective: The fast lock connection of the cabinet; multi-functional, can be fixed, stacked, lifting;
6. Convenient maintenance: optional magnetic module, power box and module can be assembled and disassembled from front; maintenance of rental installation is convenient;
7. Safe and beautiful: hard connection of module: the self-locking cable between cabinet: safe and beautiful;
8. Silent operation: no fan, noise $\leq 40\text{dB}$; Does not affect the audiovisual effect;
9. Big screen of stage perfection: 3840 high refresh, 1/3000S shutter shooting, no scanning line, shadow;
10. Pixel pitch of cabinet is 2.6/2.9/3.9mm indoors and outdoors, The box is equipped with 2.6/2.9/3.9mm pixel spacing inside and outside the home; Designed for commercial square, large-scale events, theater stage, exhibition, new product launch and other events.

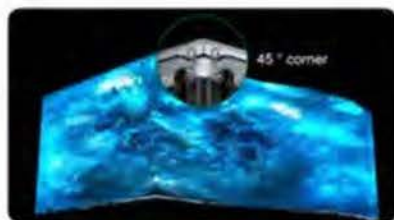

Parameter

Pixel pitch(mm)	3.91mm
Pixel density(dots/m ²)	65536 Dots/m ²
LED encapsulation	SMD1921
Driving method	1/16
Resolution of module (dot)	64*64 Dots
Module size(mm)	250*250*18mm
Module consumption(W)	27W
Working voltage(V)	DC4.6V
Max.consumption(W/m ²)	800W/m ²
Ave.consumption(W/m ²)	400W/m ²
Brightness(CD/m ²)	4500CD/m ²
Color temperature(K)	3000-10000K adjustable
View angle(H/V)	H: 140°; V: 120°
Refresh rate(Hz)	3840Hz
Working temperature (°C)	- 10~50°C
Protect degree(F/B)	IP65
Grey / scale (bit)	13bit



V-Rent-J

P2.6/2.97/3.91 Rental Stage LED Display

1. Ultra-thin: made of aluminum profiles, ultra-thin design, only 12kg/m²;
2. Ultra-wide viewing angle: the horizontal viewing angle can reach 160°, and the vertical can reach 140°;
3. Simple installation: Firm handle, fast lock and connector design, precise positioning with locating pin;
4. Seamless splicing: ADC12-level high-strength die-casting aluminum alloy cabinet, can be assembled and disassembled frequently without deformation, high flatness, seamless splicing;
5. Wide usage: It is suitable for various events such as shopping malls, weddings, conferences, concerts, conferences, etc. It can also be used for fixed installations.



Parameter


Pixel pitch(mm)	3.91mm
Pixel density(dots/m ²)	65536 Dots/m ²
LED encapsulation	SMD2020
Driving method	1/32
Resolution of module (dot)	64*64 Dots
Module size(mm)	250*250*18mm
Module consumption(W)	25W
Working voltage(V)	AC220V±10%
Max.consumption(W/m ²)	400W/m ²
Ave.consumption(W/m ²)	200W/m ²
Brightness(CD/m ²)	400-600CD/m ²
Color temperature(K)	3000-10000K adjustable
View angle(H/V)	H: 160°; V: 140°
Refresh rate(Hz)	1920Hz
Working temperature (°C)	- 10~40°C
Protect degree(F/B)	IP40
Grey / scale (bit)	13bit



V-MAX-B

Indoor Front Maintenance Wall-mounted Display

1. Ready stock: Ready stock in European and American warehouses, face to face payment and fetching is available;
2. High precision: Die-cast aluminum cabinet, high precision and good flatness;
3. Good compatibility: The cabinet can be quickly replaced with module of the pixel pitch from P1.25 to P4, and images can be upgraded to higher quality with lower cost;
4. Ultra-light and thin: Die-cast aluminum cabinet, light-weighted, thin, beautiful appearance;
5. Wall-mounted installation: modules, power supplies, and system cards can be fully maintained from the front; space-saving, suitable for high-end commercial display occasions;
6. Ratio: Can be assembled to 4:3, 16:9 large screens; the same video source ratio as LCD, and can directly replace the original LCD. Widely used in auditorium stage, conference room, banquet hall, exhibition studio, traffic command, security monitoring and other occasions.

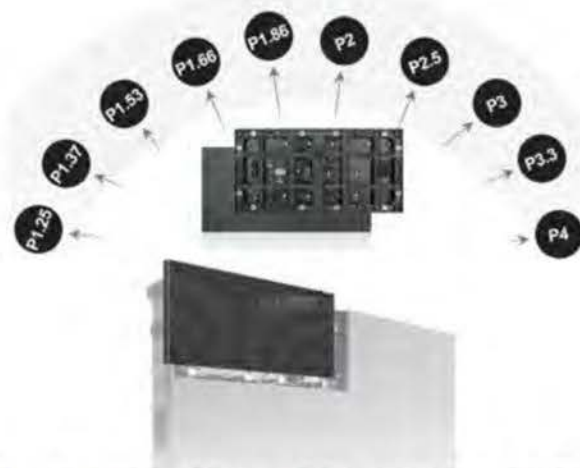

The pixel pitch of the modules range from P1.25 to P4



Parameter

Pixel pitch(mm)	2.5 mm	3.3 mm	4 mm
Pixel density(dots/m ²)	160000 Dots/m ²	90180 Dots/m ²	62500 Dots/m ²
LED encapsulation	SMD1515	SMD2020	SMD2020
Driving method	1/32S	1/24S	1/20S
Resolution of module (dot)	128*64 Dots	96*48 Dots	80*40 Dots
Module size(mm)	320*160 mm	320*160 mm	320*160 mm
Module consumption(W)	18.5W	22W	20W
Working voltage(V)	DC4.6V	DC4.6V	DC4.6V
Max.consumption(W/m ²)	360W/m ²	430W/m ²	390W/m ²
Ave.consumption(W/m ²)	108W/m ²	128W/m ²	130W/m ²
Brightness(CD/m ²)	800 CD/m ²	800 CD/m ²	800 CD/m ²
Color temperature(K)	6000K-8000K	6000K-8000K	6000K-8000K
View angle(H/V)	H: 120°; V: 120°	H: 120°; V: 120°	H: 120°; V: 120°
Refresh rate(Hz)	1920-3840Hz	1920-3840Hz	1920-3840Hz
Working temperature (°C)	-20~50°C	-20~50°C	-20~50°C
Protect degree(F/B)	IP40	IP40	IP40
Grey / scale (bit)	14bit	14bit	14bit



V-Pad-COB

4K/8K Indoor Full Color Led Display

1. High reliability: COB modules, moisture proof, Anti-collision, Scrubable lamp surface, low power consumption, fast heat dissipation, effectively prolong the service life of the chip;
2. Good consistency, seamless assemble, available for 2K/4K/8K solutions;
3. Magnetic modular design, it can be mounted to the wall and maintained from front, save space and guarantee worry-free operation of large screen;
4. Constant current drive chip, low power dissipation, uniform light, meet the high refresh rate/contrast ratio/gray level requirements;
5. Support point by point calibration function, insure the color and brightness uniformity of whole screen after assemble, and improve visual performance;
6. 160° Ultra large horizontal and vertical viewing angel, Soft and not dazzling image, better visual performance;
7. Widely applied to professional application, such as security monitoring/command and monitor system/conference room/museum/display/industrial design/exhibition, where need HD images.




Parameter

Pixel pitch(mm)	0.93mm	1.25mm	1.56mm	1.875mm
Pixel density(dots/m ²)	1137778 Dots/m ²	640000 Dots/m ²	409600 Dots/m ²	284444 Dots/m ²
LED encapsulation	Inverted COB	Inverted COB	Inverted COB	Inverted COB
Driving method	-	-	-	-
Resolution of module (dot)	160*180 Dots	120*135 Dots	96*108 Dots	80*90 Dots
Module size(mm)	150*168.75mm	150*168.75mm	150*168.75mm	150*168.75mm
Module consumption(W)	10W	9W	9W	8W
Working voltage(V)	DC2.8V/3.8V	DC4.2V	DC4.2V	DC4.2V
Max.consumption(W/m ²)	380W/m ²	330W/m ²	330W/m ²	320W/m ²
Ave.consumption(W/m ²)	120W/m ²	110W/m ²	110W/m ²	110W/m ²
Brightness(CD/m ²)	300~600CD/m ²	300~600 CD/m ²	300~600 CD/m ²	550 CD/m ²
Color temperature(K)	9300K	9300K	9300K	9300K
View angle(H/V)	H: 160°; V: 160°	H: 160°; V: 160°	H: 160°; V: 160°	H: 160°; V: 160°
Refresh rate(Hz)	2880-3840Hz	2880-3840Hz	2880-3840Hz	2880-3840Hz
Working temperature (°C)	- 10~40°C	-10~40°C	-10~40°C	-10~40°C
Protect degree(F/B)	IP54	IP54	IP54	IP54
Grey / scale (bit)	≥13bit	≥13bit	≥13bit	≥13bit

V-Trans

Flexible LED Film Screen

1. LED: light drive in one, independent research and development, high reliability, mini LED device, industry leading;
2. High transmittance: The transmittance is more than 90%, which does not affect the glass daylighting;
3. Easy to install: without steel structure, just stick the thin screen slightly and connect the power signal;
4. Light and thin: as thin as 2.5mm, as light as 5kg/m².

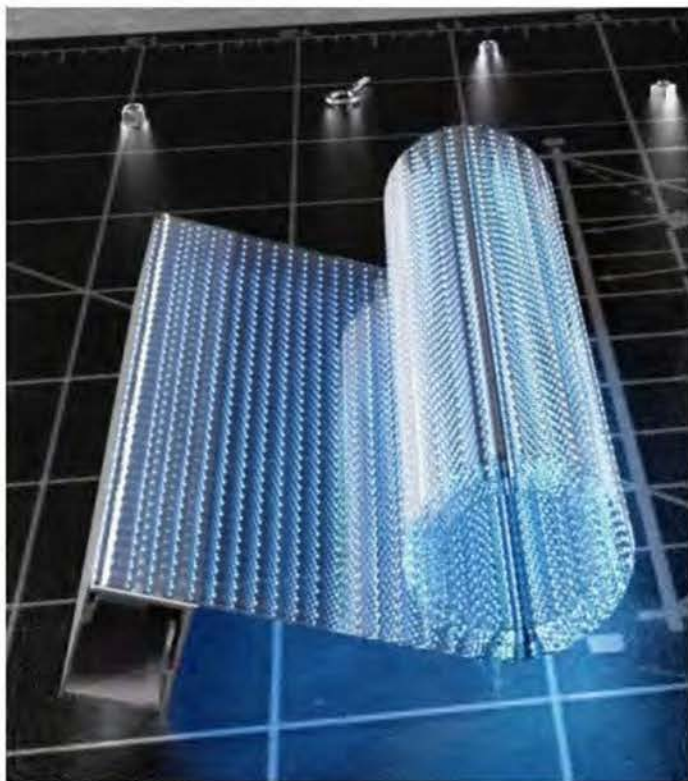

Parameter

Pixel pitch(mm)	6	6.25	8	10	15	20
Pixel density(dots/m ²)	27777	25600	16500	10000	6625	2500
LED encapsulation	REE1515	REE1515	REE1515	REE1515	REE2022	REE2022
Pixel composition	R1G1B1	R1G1B1	R1G1B1	R1G1B1	R1G1B1	R1G1B1
Driving method	Static	Static	Static	Static	Static	Static
Resolution of module (dot)	136*64	160*40	125*50	100*40	66*26	50*20
Module size(mm)	816*384	1000*400	1000*400	1000*400	990*390	1000*40
Input voltage (V)	AC110~240	AC110~240	AC110~240	AC110~240	AC110~240	AC110~240
Max.consumption(W/m ²)	400	600	400	400	400	400
Ave.consumption(W/m ²)	200	200	200	200	200	200
Brightness(CD/m ²)	2000/4000	2000/4000	2000/4000	2000/4000	2000/4000	2000/4000
Viewing angle(H/V)	160°	160°	160°	160°	160°	160°
Transparency (%)	90%	90%	92%	94%	94%	95%
Refresh rate(Hz)	3840	3840	3840	3840	3840	3840
Working temperature(°C)	-20~55°C	-20~55°C	-20~55°C	-20~55°C	-20~55°C	-20~55°C
Weight (kg)	1.3	1.3	1.3	1.3	1.3	1.3
Thickness (mm)	2.5	2.5	2.5	2.5	2.5	2.5
Grey / scale (bit)	16	16	16	16	16	16

V-Trans

3.91x7.81 Indoor Transparent Display



1. Light, thin, transparent and easy to install, it is mainly aimed at the integrated transparent display screen solution for commercial and supermarket window advertisements;
2. Light and thin: All-aluminum profile structure, the cabinet is only 6Kg/m², which is 75% lighter than the traditional outdoor LED screen; the thickness of the cabinet is 80cm, which is 50% thinner than the traditional display screen; it is integrated with the window and glass curtain wall without affecting original structure;
3. High transparency: It reduces the blockage of structural components to the line of sight and maximizes the perspective effect. The light transmittance is 55%~78%. After lighting, the light bar is almost invisible at a distance of 3 meters or more;
4. Easy to install: It can be spliced by quick lock, the installation is simple and fast, and the labor cost is saved;
5. High brightness: 800-7000CD/M² brightness is adjustable, indoor installation is not dazzling, and semi-outdoor installation has higher brightness, which can ensure clear visibility under daylight conditions;
6. Energy saving: Using high-brightness LED lights, the power consumption is lower under the same brightness conditions, which can reduce power consumption by more than 50%;
7. Good: Standard modular design, convenient for production, installation, transportation, 100% full inspection and factory inspection, high quality assurance, and better user experience for customers.



Parameter

Pixel pitch(mm)	3.9*7.8mm
Pixel density(dots/m ²)	32768 Dots/m ²
LED encapsulation	1921
Driving method	8S
Resolution of module (dot)	126*16 Dots
Module size(mm)	1000*1000mm
Module consumption(W)	20W
Working voltage(V)	DC5V
Max.consumption(W/m ²)	400W/m ²
Ave.consumption(W/m ²)	260W/m ²
Brightness(CD/m ²)	3500~4000 CD/m ²
Transparency(Hz)	55%~78%
Viewing angle	H: 120°; V: 120°
Refresh rate	1920~3840Hz
Working temperature	-10~40°C
Protect degree(F/B)	IP30
Grey level	14bit



V-Bus


P3.1x5.57 Rear Window

1. 4G all network wireless communication (customized according to the country), which can broadcast text, pictures, videos and so on wirelessly;
2. High refresh rate Chip and wide view angle, uniform picture proportion, good image quality without flickering, and excellent advertising effect;
3. Ultra-transparent, invisible power supply and control card design, no shelter for the light, and no influence to the sight of the driver and passengers;
4. Wide voltage power(DC9-36V), with delayed start and reserve screen off function, no influence for the start and reserve of the car;
5. Safety guarantee: imported TI Chip, professional vehicle power supply, with reverse connection, over-current, and short circuit protection, stable and safe;
6. Integrated design, no flat cable throughout the lamp board, more stable and shockproof; Low failure rate, more convenient maintenance.



Parameter

Pixel pitch(mm)	V3.1*H5.57
Pixel density(dots/m ²)	57899 Dots/m ²
LED encapsulation	SMD2020
Driving method	1/15S
Resolution of module (dot)	24*90 Dots
Module size(mm)	133.68*279mm
Module consumption(W)	8.5W
Working voltage(V)	DC5V
Max.consumption(W/m ²)	≤190W/m ²
Ave.consumption(W/m ²)	≤60W/m ²
Brightness(CD/m ²)	5000CD/m ²
Color temperature(K)	6000~8000K
View angle(H/V)	H: 160°; V: 160°
Refresh rate(Hz)	≥1920Hz
Working temperature (°C)	-40~85°C
Protect degree(F/B)	IP40
Grey / scale (bit)	16bit

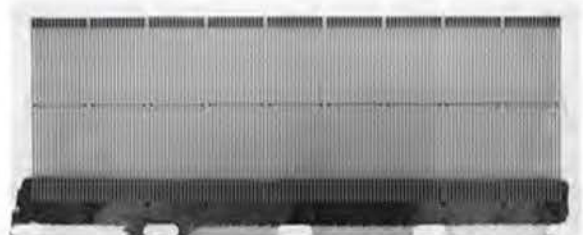

V-Taxi-Rear

P6x2.92 COB 3in1 Rear Window

1. COB integrated encapsulation transparent display panel + mobile phone 4G control system play card + GPS positioning + WIFI function, easy to operate and play;
2. Advertising brightness can be adjusted according to the intensity of the light, more energy-efficient, slower Leds attenuation, and longer life span;
3. The light transmittance at the hollow of the transparent display panel reaches 52%, and the addition of the reversing screen function does not affect the reversing vision of the driver;
4. The flame-retardant semi-PU composite fabric protects HUB boards, control cards, 4G cards, etc., plus a soft bag that has better bending ability during mounting;
5. Weight of the screen is less than 1.5kg, and it can be installed quickly and without damaging the glass or bracket. The screen body and the flexible deformation two-dimensional bending fit the mounting surface;
6. Can play graphic advertisements, subtitles, videos, lunar calendar, dial, timing, temperature, humidity, announcements, weather forecasts, etc..



Parameter

Pixel pitch(mm)	6X2.92mm
Pixel density(dots/m ²)	57142 Dots/m ²
LED encapsulation	COB 3 in 1
Driving method	1/8S
Resolution of module (dot)	15*96 Dots
Module size(mm)	90*280*2mm
Module consumption(W)	12.5W
Working voltage(V)	DC4.2V
Max.consumption(W/m ²)	125W/m ²
Ave.consumption(W/m ²)	35W/m ²
Brightness(CD/m ²)	4300 CD/m ²
Color temperature(K)	6500 K
View angle(H/V)	H: 120°; V: 120°
Refresh rate(Hz)	1920Hz
Working temperature (°C)	-20~50°C
Protect degree(F/B)	IP65/IP54
Grey / scale (bit)	13bit

V-TAG COB SHELF

Smart Cob Shelf Edge Led Display Screen use in supermarket



1. Indoor 300 x 60mm profile aluminum cabinet. Compatible pitch: COB1.25/GOB1.87 mm Size flexible splicing, design for shelf use. Freely connect units right and left (The max length to 4.8m);
2. Creative installation design, supporting L-shape plate mounted and hook hanging installation;
3. High protection, high stability. COB and GOB package technology option. XT60 standard network port, two-sides power input;
4. Excellent Display performance;
5. Wide viewing angle, high contrast ratio Handy control ways, supporting USB, Wi-Fi, 4G, network control etc.



Parameter

U-TAG			
Pix (mm)	COB 1.25mm	SMD 1.87mm	GOB 1.87mm
Resolution of module (dot)	120*45 Dots	82*30Dots	82*30 Dots
Module size(mm)	150*56.25mm	150*56.25mm	150*56.25mm
Display Size (mm)	300*60*23	300*60*23	300*60*23
Driving method	1/45	1/30	1/30
Cabinet Material	Aluminum cabinet	Aluminum cabinet	Aluminum cabinet
Control Method	USB/4G/Network Port/WIFI	USB/4G/Network Port/WIFI	USB/4G/Network Port/WIFI
Working temperature (°C)	- 10~40°C	- 10~40°C	- 10~40°C
Protect degree(F/B)	IP65	IP65	IP65
Grey / scale (bit)	≥13bit	≥13bit	≥13bit



V-Poster

Intelligent Advertising Mirror LED display

1. Plug and play – No need installation: can freely watch and play video, audio or pictures anytime and anywhere, and update the content stored in the built-in media player through WIFI or USB, with a simple and clear operation interface;
2. Front maintenance - fast and simple: the module is equipped with a reliable permanent magnet protection system, and the front maintenance tools are used to achieve fast maintenance in front of the module;
3. Ultra-light and thin - support any installation method: combine the latest technology and industrial design of the current industry, present a fashionable and simple all-aluminum frame with integrated appearance, body painting, thickness of 35mm, weight of 35kg, can be installed freely, and save space;
4. Intelligent module - wireless splicing: three-level MCU management and two-level Inturl Cyclone4 management realize self-communication and self-management of management display module, and realizing system zeroing, simple keys on the body and convenient operation;
5. Intelligent management - network cluster management: use DDR and fish storage chips to record, store and manage the data information of the display module;



Parameter

Pixel pitch(mm)	2.5
Pixel density(dots/m ²)	160000
LED encapsulation	SMD2121/1515
Driving method	1/32
Resolution of module (dot)	128*64
Module size(mm)	320*160
Module consumption(W)	≤27
Working voltage(V)	4.6
Max.consumption(W/m ²)	≤800
Ave.consumption(W/m ²)	≤300
Brightness(CD/m ²)	1200
Color temperature(K)	6000~8000
View angle(H/V)	120°
Refresh rate(Hz)	1920~3840
Working temperature (°C)	-10~85°C
Protect degree(F/B)	IP40
Grey / scale (bit)	≥14



V-Cube

Cube-shaped LED Screen

1. Industry outdoor minimum distance products, waterproof grade Ip65;
2. Any size can be designed and manufactured according to customer requirements;
3. 360° Visual angle, any angle can feel good visual effect;
4. Convenient installation, support a variety of installation methods;
5. 5 days fast delivery.



Parameter

Pixel pitch(mm)	2.5mm
Pixel density(dots/m ²)	160000 Dots/m ²
LED encapsulation	SMD2020
Driving method	1/40
Resolution of module (dot)	80*80Dots
Module size(mm)	200*200mm
Module consumption(W)	15W
Working voltage(V)	5V
Max.consumption(W/m ²)	240W/set
Ave.consumption(W/m ²)	≤200W/set
Brightness(CD/m ²)	600CD/m ²
Color temperature(K)	6000K-8000K
View angle(H/V)	H:140°; V:140°
Refresh rate(Hz)	3840Hz
Working temperature (°C)	-20 ~60°C
Protect degree(F/B)	IP40
Grey / scale (bit)	13bit



V-Pole

Smart Light Pole LED Display

1. Convenient management: cluster management, supporting multi-level grouping of terminals and users, and multi-level permission settings for users;
2. Easy to expand: Modular design, easy to expand software functions;
3. Multiple networking: support wired, wireless (WiFi, 3G, 4G) and other networking methods;
4. Real-time information release: immediate release of emergency information; automatic generation of play logs;
5. Content split display: one screen can play text, video and pictures at the same time;
6. Fixed-point delivery function: fixed-point playback, different content can be played on the same screen, and the same content can be played on different screens;
7. Basic function settings: adjustment of screen brightness, audio volume, one-key software version upgrade, etc.



Parameter

Pixel pitch(mm)	2.5mm	2.5mm	2.5mm
Resolution of module (dot)	128*256 Dots	192*384 Dots	256*512 Dots
Module size(mm)	160*160mm	160*160mm	160*160mm
Display Size (mm)	320*640	480*960	640*1280
External Size(mm)	420*740*105	580*1060*105	740*1380*105
Brightness(CD/m ²)	5000~7000CD/m ²	5000~7000CD/m ²	5000~7000CD/m ²
Weight(kg)	13	22	34
Cabinet Material	Cast Aluminum Profile/Sheet Metal	Cast Aluminum Profile/Sheet Metal	Cast Aluminum Profile/Sheet Metal
Control Method	4G/Network Port/WIFI	4G/Network Port/WIFI	4G/Network Port/WIFI
Maintenance Mode	Back Maintenance	Back Maintenance	Back Maintenance
Suitable Post Height (m)	2.5~4	4~6	6~9
Working temperature (°C)	- 10~40°C	- 10~40°C	- 10~40°C
Protect degree(F/B)	IP65	IP65	IP65
Grey / scale (bit)	≥13bit	≥13bit	≥13bit



V-Floor

Floor LED Display

1. Waterproof and moisture-proof: The bottom shell, mask, power cable and signal cable of the indoor floor LED screen module are all equipped with waterproof and moisture-proof materials, made of raw materials with low moisture absorption coefficient, and the front and rear of the cabinet can reach the protection grade of IP40;
2. Anti-slip and wear-resistant: The mask of the intelligent interactive floor Led screen is made of imported PC material, which has high wear resistance and flexibility, as well as good resistance to high and low temperatures. The mask has better anti-slip and weight-bearing functions;
3. Super load-bearing: Each component of the intelligent interactive LED floor screen can have an ultimate load-bearing capacity of up to 2 tons per square meter;
4. Mute heat dissipation: The power box adopts a special heat dissipation device to achieve a better mute heat dissipation function.



Parameter

Pixel pitch(mm)	3.91mm
Pixel density(dots/m ²)	65536 Dots/m ²
LED encapsulation	SMD1921
Driving method	1/16S
Resolution of module (dot)	64×64 Dots
Module size(mm)	250X250mm
Module consumption(W)	50W
Working voltage(V)	DC5V
Max.consumption(W/m ²)	800W/m ²
Ave.consumption(W/m ²)	260W/m ²
Brightness(CD/m ²)	2500CD/m ²
Color temperature(K)	3200K-9300K
View angle(H/V)	H: 120°; V: 120°
Refresh rate(Hz)	2000Hz
Working temperature (°C)	-20~50°C
Protect degree(F/B)	IP40
Grey / scale (bit)	13bit



V-Poster-LCD

32"/43"/55" Smart Outdoor Signage

1. Various Control Methods: The new design puts the speaker on the front, which greatly improves the sound effect, and uses the metal wire drawing process, with the piano lacquer, which is not only beautiful but also waterproof;
2. IP65 Rated Weatherproof Enclosure: The outer casing has an IP65 rating which means it keeps out all airborne swarf, dust, and other particles and is protected from any wet weather conditions, broadening the range of possible environments;
3. Secure Locking Bar: Advanced locking mechanism for simpler operation;
4. Ensuring the stability and safety of the display;
5. Long Running Time: The lithium-ion battery revolutionizes the way you can use digital signage. This commercial grade slimline battery solution gives you over 14 hours running time (environment < 0° , the running time will decrease).



Parameter

Products module	43" Smart LCD
Display Model	BOE IPS High TNI 105°C
Resolutions	1920x1080 (FHD)
Display Area (mm)	940.896(H)*529.254(V)
Aspect Ratio	0.672916667
Brightness (cd/m²)	1500
Colour	16.7M
Viewing Angle	178°
Contrast Ratio	4000:1
Touch	Optional function
Charging Time	7 hours
Working Time	14 hours
Batter Capacity	50000mAh
Power Supply	24V
Power Consumption	90W
Energy	1088.54Wh
Outside color	7 colors available