

ATEM 2 M/E Advanced
Panel 30



The 2 M/E model features 2 M/E rows with 30 input buttons and 3 independent system control LCDs for each row. Plus each row can control up to 4 M/Es in larger switchers. Both rows and all input buttons include LCDs for custom labeling. Each row also includes an independent select bus!

\$7,905


Connections

Ethernet

4 x 10/100/1000 BASE-T with loop output for additional control panels or computers.

Software Updates

1 x USB-C for firmware updates.

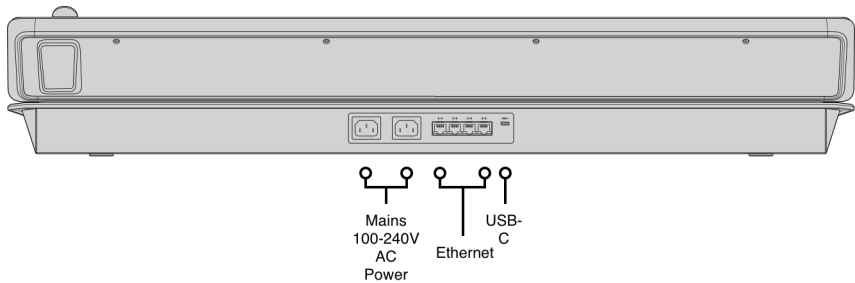

Product Specifics

Number of Mix Effects Rows

2

Crosspoint Label

6 rows 24 character LCD

Preview Transition

2

Direct Cross Points

30

On-Air indicator

12

Transition Rate Displays

Via main menu

Shifted Cross Points

60

Power Status Indicators

None

LCD Menu Displays

3

Crosspoint Button Type

Tri-Color LED

DSK Transition Selectors

4 x Auto, Cut, Tie/Preview

Menu Control


3 x 20 buttons

Dedicated Macro Buttons 2 x 30	Source Select Bus 2	Numeric Keypad 1
Transport Control Buttons 8	Fader Bar 2	
Destination Bus 2	3 Axis Joystick 1	

Software

Software Applications
ATEM Software Control Panel.

Operating Systems



Mac 13.0 Ventura,
Mac 14.0 Sonoma or later.



Windows 10 and 11.

Power Requirements

Input Voltage 2 x Internal 100 - 240V AC.	Redundant Power Yes	Power Usage 120W
---	-------------------------------	----------------------------

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

Up to 95%

What's Included

ATEM 2 M/E Advanced Panel 30

Welcome wallet with QR code for software download

Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2024, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller