





Universal Conduit AP Drop Mount

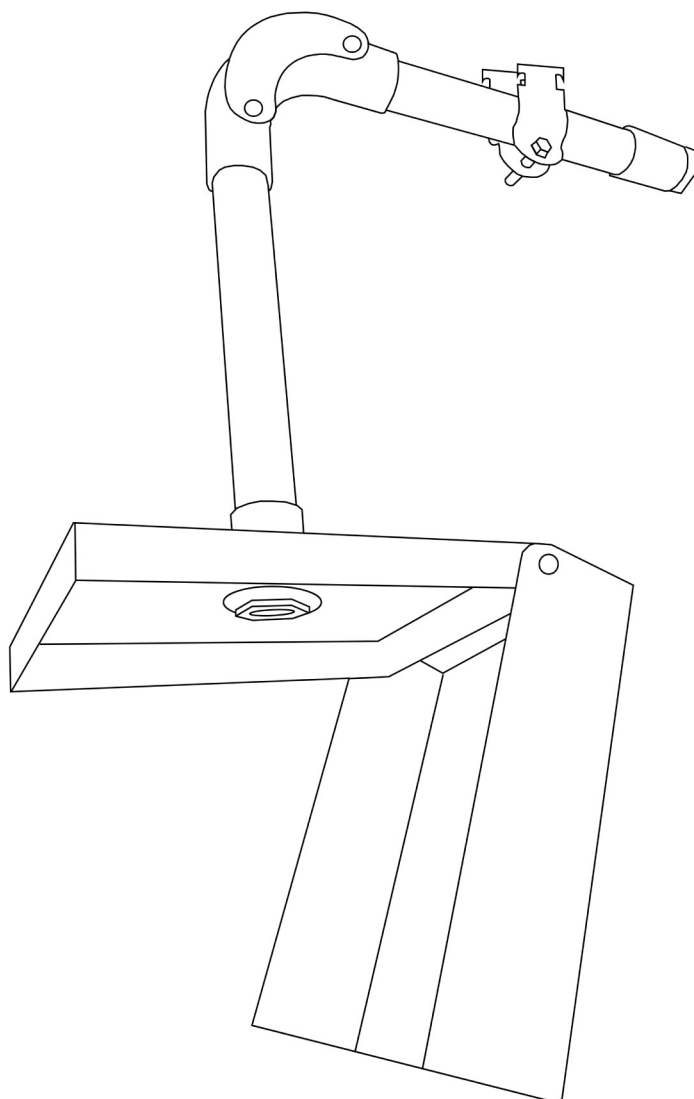

Instruction Manual




Document Title:	Universal Conduit AP Drop Mount Instruction Manual
Version Status:	Issued
Classification:	Public
Approved by:	R McGinnis
Approval Date:	02/10/2025
Version:	1.0




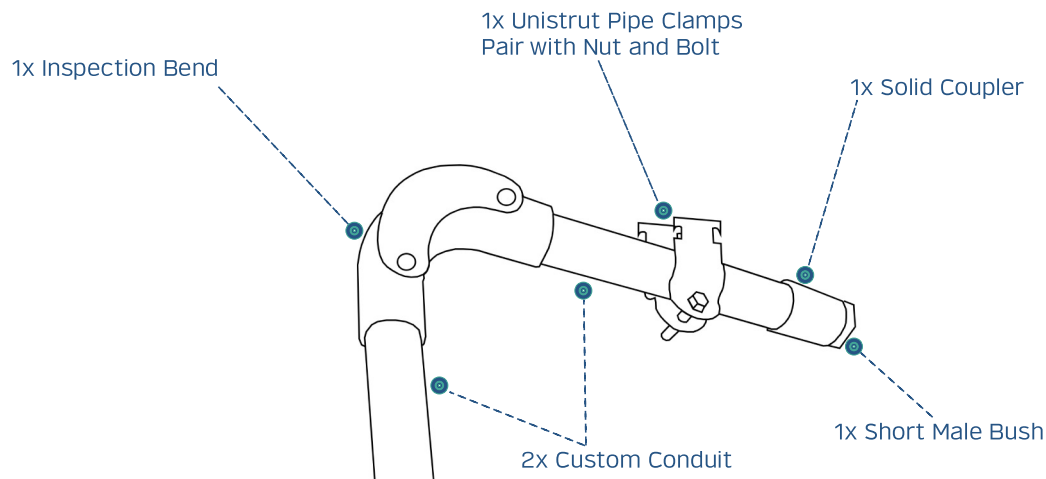

1x Flange Coupler with Short
Male Bush and Washer

1x Universal AP Drop Mount

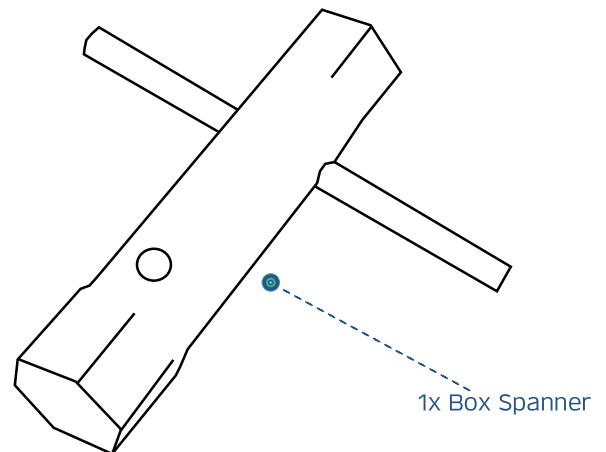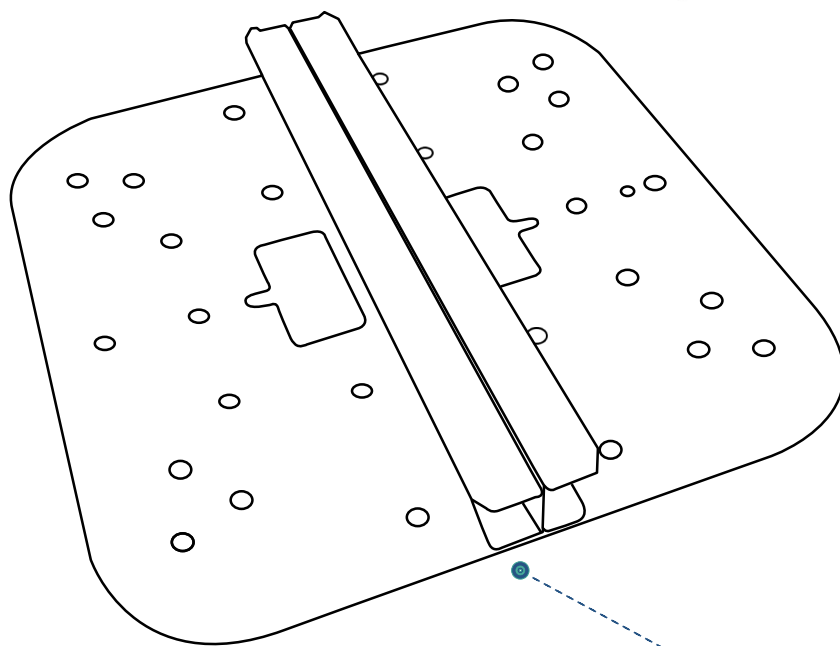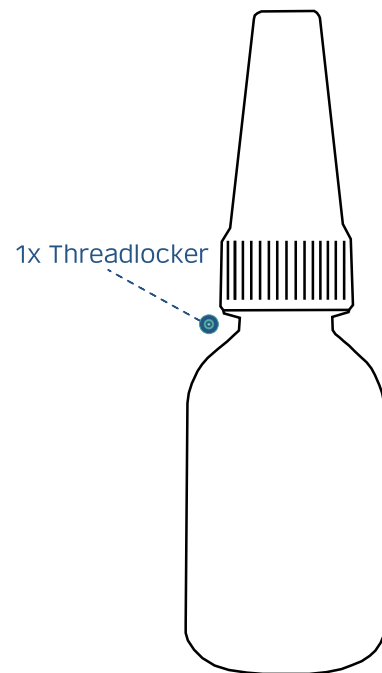

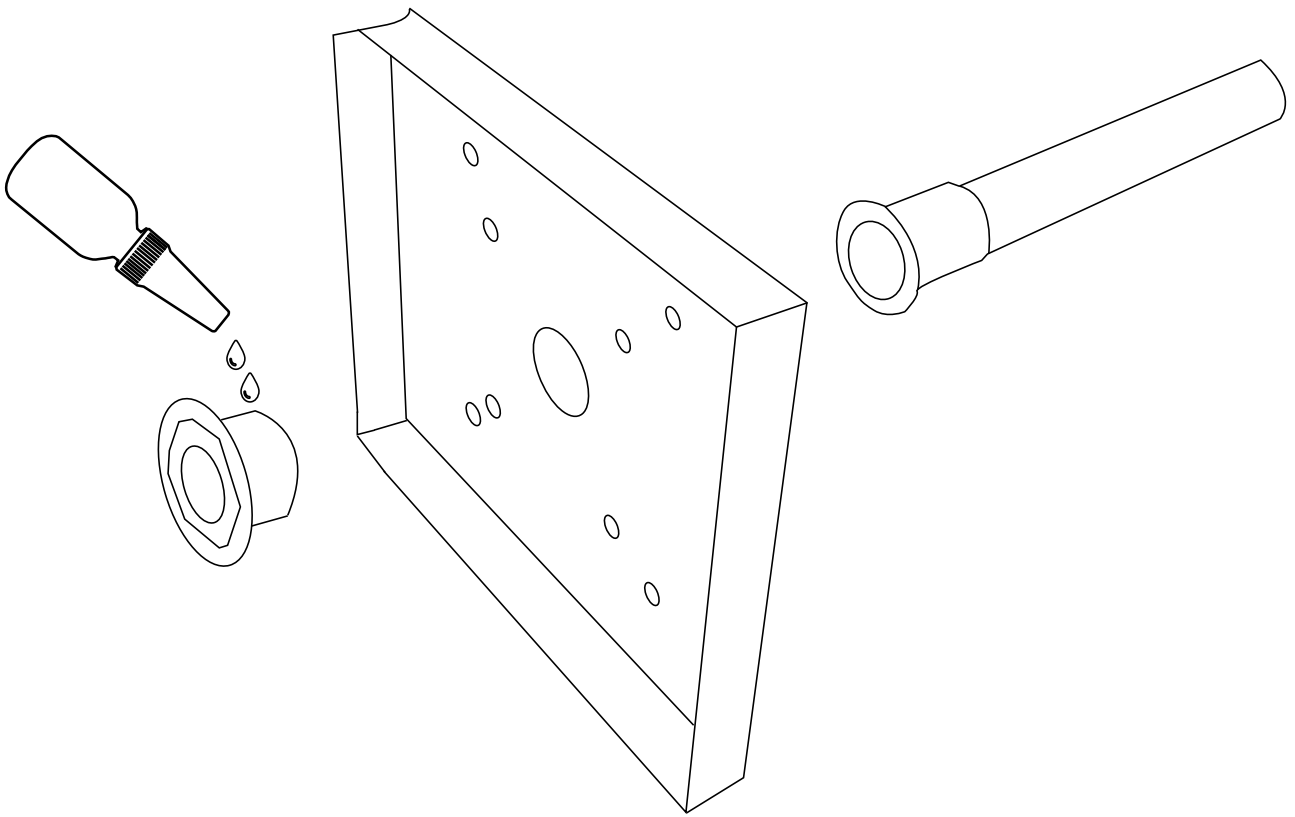

Our Universal Conduit AP Drop Mounts come partly assembled with all the necessary tools to complete assembly.

To assemble the conduit to the drop mount, we have provided threadlocker which we recommend using on the Short Male Bush before it is screwed into the Flange Coupler as shown in the diagram above.

For any assistance installing the mounts or any questions, please call 01482 886161 or email enquire@marquest.com.



Do not attempt to install this product until all instructions and warnings have been read and properly understood. Please keep these instructions for all future reference.

Please check carefully to make sure there are no missing or defective parts – defective parts must never be used. MarQuest Ltd are not liable or responsible for damage or injury caused by improper installation, improper use, failure to observe these safety instructions or any modifications that have not been performed by MarQuest.

Great care must always be taken during installation due to the nature of this product. If you do not fully understand the instructions or are not sure how to install this product safely, please consult a professional for advice/to install this product. Failure to mount this product correctly may cause injury during installation and at any time thereafter.

Please pay careful attention to where this product is located. If located in a public or frequently populated area ensure that the product is out of reach of people. If it is to be suspended over walkways or location of people, then great care should be taken to secure all parts of the installation.

When routing cables take advantage of the built in conduit cable management features that the product provides and ensure that all cables are tidy and secure. Check to see that any moving aspects of the product can do so unhindered by any cabling. Immediately after installation double-check that the work done is safe and secure, all necessary fixings are present and are of ample tightness.

It is recommended that periodic inspection of the product and its fixing points are made as frequently as possible to ensure that safety is maintained.

Revision Date	By	Number	Details
02/10/2025	NM	1.0	Initial Release

www.marquest.com
+44 1482 886161
enquire@marquest.com

