
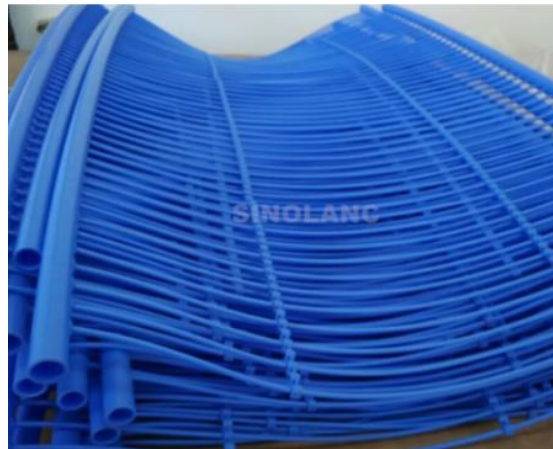


# CAPILLARY TUBE MAT

## H-series

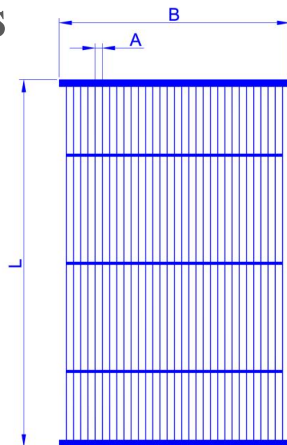

|                                 |                                              |
|---------------------------------|----------------------------------------------|
| Model                           | <b>H-40</b>                                  |
| Material                        | PP-R Type 3 (Polypropylene Random Copolymer) |
| Collector tube $\Phi$           | 20 x 2.0 mm                                  |
| Capillary tube $\Phi$           | 4.3 x 0.8 mm                                 |
| Spacing of capillary tube(A)    | 40 mm                                        |
| Length of capillary mat (L)     | 500-12000 mm                                 |
| Width of capillary mat (B)      | $\leq 1000$ mm                               |
| Water contents                  | 0.16 L/m <sup>2</sup>                        |
| Total weight with water         | 375 g/m <sup>2</sup>                         |
| Heat exchange surface           | 0.34 m <sup>2</sup> /m <sup>2</sup>          |
| Test pressure in production     | 20 bar                                       |
| Operating pressure              | 4 bar                                        |
| Maximum water temperature       | 55 °C                                        |
| Optimal supply temp.for heating | +28-32 °C                                    |
| Optimal supply temp.for cooling | +16-19 °C                                    |

### Contact Us

Phone: +86 18920696269

Email: [energy@snlanc.com](mailto:energy@snlanc.com)

Official Web Only: [www.capillarytubemats.com](http://www.capillarytubemats.com)