


CAPILLARY TUBE MAT



SINOLANC
Energy Technology Co., Ltd

U-series

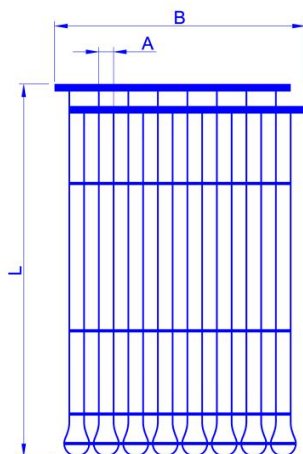

Model	U-20
Material	PP-R Type 3 (Polypropylene Random Copolymer)
Collector tube Φ	20 x 2.0 mm
Capillary tube Φ	4.3 x 0.8 mm
Spacing of capillary tube(A)	20 mm
Length of capillary mat (L)	500-8000 mm
Width of capillary mat (B)	≤ 1000 mm
Water contents	0.32 L/m ²
Total weight with water	750 g/m ²
Heat exchange surface	0.68 m ² /m ²
Test pressure in production	20 bar
Operating pressure	4 bar
Maximum water temperature	55℃
Optimal supply temp.for heating	+28-32 ℃
Optimal supply temp.for cooling	+16-19 ℃

Contact Us

Phone: +86 18920696269

Email: energy@snlanc.com

Official Web Only: www.capillarytubemats.com