



DIN 22.5mm

22.5mm Din Rail Timer TXA838


Features

- ON delay/Interval
- 8 time ranges
- Universal supply voltage
 - 20 to 240V AC 50/60 Hz
 - 18 to 240V DC
- LED indications: Power ON, Relay ON
- DIN rail and Back panel mount

Applications


- Power controls panel
- Compressor panel
- Packing machine
- Printing machine
- Testing equipment

Dimensions (All are in mm)

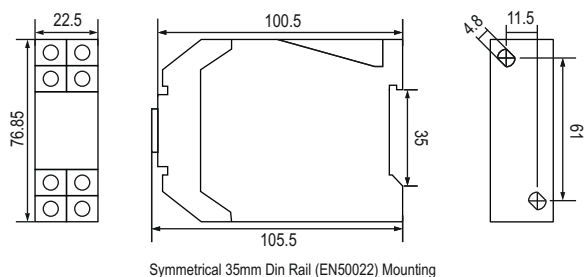


Timing diagram


Function : ON delay (A)



Function : Interval (B)



Terminal connection



Technical specifications

LED specifications	
No. of LED	1
LED indication	Star relay ON, Delta relay ON
Input specifications	
Accuracy setting	±5% of F.S.
Repeat	± 0.5% or 50msec (F.S.= Full scale)
Output specifications	
Relay contact	2C/O (SPDT)
Contact rating	5A @250V AC or 24V DC Resistive
Functional specifications	
Modes	On delay/Interval
Time ranges	0-3 sec/min, 0-10 sec/min, 0-30 sec/min, 0-60 sec/min
Resolution	0.3 sec
Reset	ON power interruption, Reset time <100 msec
Auxiliary supply specifications	
Supply voltage	20 to 240V AC (50/60 Hz), 18 to 240V DC
Power consumption	2VA max
Environmental specification	
Temperature	Operating: 00 to 50 °C (32 to 122 °F) Storage: -20 to 75 °C (-4 to 167 °F)
Humidity (Non-condensing)	95% RH
Mechanical specifications	
Mounting	DIN rail
Weight	129 gm

Ordering information

Product code	Supply voltage
TXA838	20 to 240V AC, 18 to 240V DC