



**P1710 - Free-hanging blind with two pull-cord operating devices and changeable hangings.**

**P1715 - Free-hanging blind with two pull-cord operating devices and changeable hangings incl. cord guiding.**

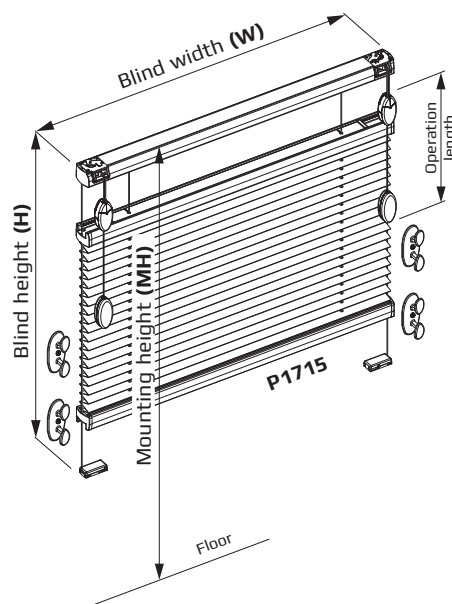

\* **Child safety:**  
for further informations  
please refer to page 6-7

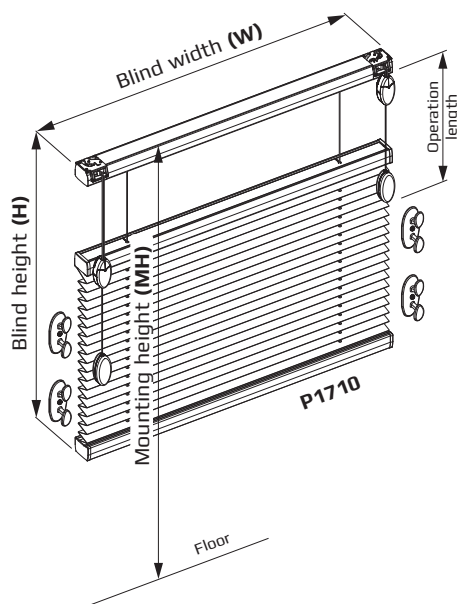

#### Dimensions/ Pleated blind measures

- **Width:** min. 0.30 m  
max. 2.20 m
- **Height:** min. 0.20 m  
max. 2.60 m
- **Surface:** max. 5.70 m<sup>2</sup>
- **Inclination angle:** max. 15°
- **Mounting height:** min. 1.50 m

#### Gear/Hardware

- Pleated fabric between two profile rails
- Fabric hangings can be stopped at any position by means of a cord brake
- Closed cord system
- Cords made of polyester yarn, Ø0.8 mm
- Pull cord made from polyester yarn, diameter of 2.2 mm
- Plastic parts made from high quality, temperature resistant and abrasion-resistant plastic

#### Control

- **Cord operation:** integrated cord lock without castor
- **Operating side:** left and right
- **Operation length:** mounting height minus 1.50 m

#### Profile rail

- **Width:** 22 mm
- **Height:** 16 mm
- Aluminium extruded (Al Mg Si 0.5 F22)
- Hole punch (Ø6.0 mm) equipped with abrasion-resistant plastic cord lugs

#### Colours

- **Profile rail:** Technically anodized in accordance with E6/EV1 in silver, black (E6-C35) and bronze (E6-C32) or powder-coated in white (RAL 9016), beige (RAL 1015) and dark grey (DB 703)
- Visible **plastic parts** adapted to the profile colours in grey, black, bronze, white, beige or dark grey

#### Fabric

- Pleated fabric hangings • 20 mm pleat width • visible drilled hole (Ø3.5 mm) for cord guiding
- Honeycomb fabrics • 25 mm width • invisible drilled hole (Ø3.5 mm) for cord guiding
- Distance between the cords 0.40 or 0.60 m (dependent on the material)

#### Mounting

- **Fixing of upper rail:** Screw the fixing bracket (V2A) directly into the window frame or glass strip (DIN 7981 Ø3.9 x 16 mm)  
or screw the glazing bead holder (with clip) onto the glass strip (DIN 7982 Ø2.9 x 9.5 mm)  
or screw the fixing angle (with clip) onto the window frame (DIN 7982 Ø3.9 x 13 mm).
- **Fixing of tightening devices:** Screw the tensioning shoe holders directly into the window frame or glass strip (DIN 7982 Ø3.9 x 13 mm)  
or screw the glazing bead holder onto the glass strip (DIN 7982 Ø2.9 x 9.5 mm)  
or screw the fixing angle onto the window frame (DIN 7982 Ø3.9 x 13 mm).

#### Shuttle protection: (Type P1715)

- Even if the window is tilted, the hangings run between two ropes (Ø1.2 mm polyester yarn with kevlar core, 16 cords) parallel to the casement
- The movable profile covers the tightening devices