


P3700 - Tensioned blind with pull-cord operation and wire tension.



* **Child safety:**
for further informations
please refer to page 6-7

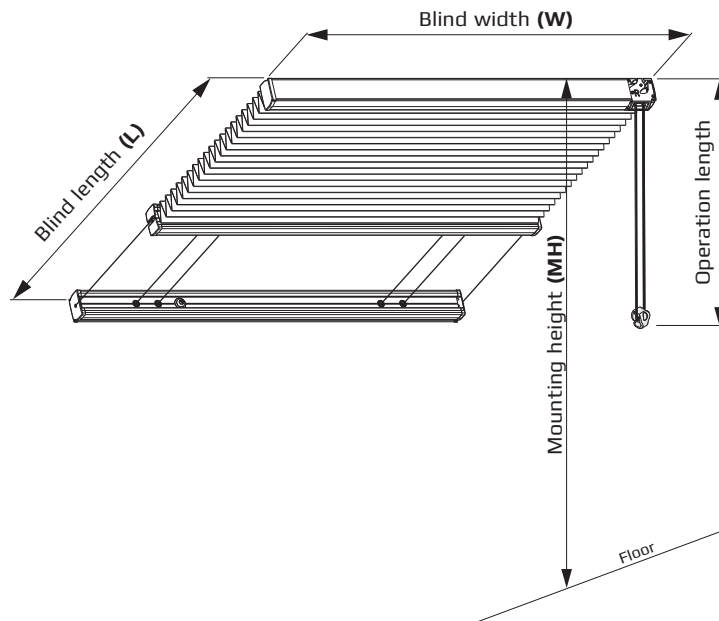

Dimensions/ Pleated blind measures

- **Width:** min. 0.30 m
max. 1.50 m
- **Length:** min. 0.20 m
max. 4.00 m
- **Inclination angle:** 45°-90°
- **Mounting height:** min. 1.50 m

Gear/Hardware

- Pleated fabric between two profile rails
- Fabric hangings can be stopped at any position
- Closed cord system taut with spring winder
- Cords made of polyester yarn, Ø1.2 mm
- Tensions wire: Material 1.4401 (Ø0.81 mm), covered in synthetic material on Ø1.00 mm in white, grey or black
- Plastic parts made from high quality, temperature resistant and abrasion-resistant plastic

Control

- **Cord operation:** Integrated cord lock without locking function
- **Operating side:** left or right
- **Operation length:** mounting height minus 1.50 m

Profile rail

- **Width:** 22 mm
- **Height:** 16 mm
- Aluminium extruded (Al Mg Si 0.5 F22)
- Hole punch (Ø6.0 mm) equipped with abrasion-resistant plastic cord lugs

Colours

- **Profile rail:** Technically anodized in accordance with E6/EV1 in silver, black (E6-C35) and bronze (E6-C32) or powder-coated in white (RAL 9016), beige (RAL 1015) and dark grey (DB 703)
- Visible **plastic parts** adapted to the profile colours in grey, black, bronze, white, beige or dark grey

Fabric

- Pleated fabric hangings • 20 mm pleat width • visible drilled hole (Ø3.5 mm) for cord guiding
- Honeycomb fabrics • 25 mm width • invisible drilled hole (Ø3.5 mm) for cord guiding
- Distance between the cords 0.28 or 0.35 m (dependent on the fabric)

Mounting

- **Fixing of upper and lower profiles:** Screw the fixing bracket (V2A) directly into the window frame (DIN 7981 Ø3.9 x 16 mm).

Wire tension

- The wire tension can be changed with an adjusting screw