



M Series 700 Ice Cube Machine

M Series 700 Ice Cube Machine

Model: MDT0700A-251 MYT0700A-251 MDT0700W-251



M700 Ice Machine on D570C Bin

- Up to 309 kgs(681 lbs) daily ice production and only 30.00" (76.00 cm) wide
- R-410A CFC-free refrigerant
- Easy access to food zone with removal of two screws and lift-off door
- White plastics in the food zone help identify areas needing cleaning
- Water shield, distribution tube, pump, floats, and trough removable by hand
- Available CleanAir™ pack controls the growth of bacteria and fungi that form slime and cause odors in the food zone

Specifications

BTU Per Hour:
9,000 (average), 13,900 (peak)

Compressor:
Nominal Rating: 1.25 HP

Refrigerant:
R-410A

Ice Machine Electric
220-240/50/1 standard

Total Circuit Ampacity:

Air Cooled: 8.6A

Water Cooled: 8.2A

Power Consumption:

Air Cooled: 1121W

Water Cooled: 911W

Maximum Fuse Size:

20A

Operating Limits:

- Ambient Temperature Range: 1.7°C to 43.3°C
- Water Temperature Range: 1.7°C to 32.2°C
- Water Pressure Ice Maker Water In:
Min. 20 psi (137.9kPA)
Max. 80 psi (551.1kPA)

HACR-type circuit breakers can be used in place of fuses



Cube Size Available



Half-dice
3/8" x 1 1/8" x 7/8"
(0.95 x 2.86 x 2.22 cm)




Dice
7/8" X 7/8" X 7/8"
2.22 X 2.22 X 2.22 (cm)





M Series 700 Ice Cube Machine

M700 on D570C Storage Bin

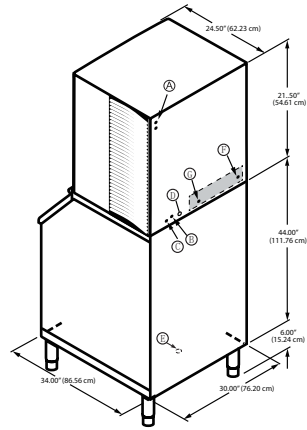

- Ⓐ Electrical Entrance (2) Options
- Ⓑ 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
- Ⓒ 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
- Ⓓ 1/2" (1.27 cm) Auxillary Base Drain Socket
- Ⓔ 3/4" (1.91 cm) Bin Drain
- Ⓕ 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
- Ⓖ 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)

Installation Note - Minimum installation clearance:
Top/sides: 8" (20.32 cm), back: 5" (12.70 cm).

Space-Saving Designs



	M700 D570C
Height	71.50" 181.61cm
Width	30.00" 76.20 cm
Depth	34.00" 86.56 cm
Bin Storage	532 lbs 241 kg

Height includes adjustable bin legs 6.00" to 7.00" (15.24 cm to 17.78 cm) set at 6.00" (15.24 cm).

Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F	Water Usage 100 lbs. 45.4 kgs. of Ice
		70°Air/ 50°F Water	90°Air/ 70°F Water		
MDT0700A-251	dice	290 kg	228kg	5.36	71.8
		639 lbs	502 lbs		
MYT0700A-251	half - dice	309 kg	240kg	5.36	71.8
		681 lbs	529lbs		
MDT0700W-251	dice	292 kg	229kg	4.34	67.5
		643lbs	504 lbs		

Order ice storage bin separately. Suffix of model "A" means air cooled condenser, Suffix of model "W" means water cooled condenser

CleanAir™ Pack Slime Inhibitor



CleanAir™ Pack Accessory is patented technology that releases chlorine dioxide on a controlled basis to inhibit the growth of bacteria and fungi that form slime and cause odors in the food zone of ice machine.

Easy Access to Parts of Water System



Water shield, distribution tube, pump, floats, and trough removable by hand

Easy Access to Air Filter



Easy to clean, reusable air filter protects condenser from lint, grease and dust.

©2023 01/18 Manitowoc 09/26 Continuing product improvement may necessitate change of specifications without notice.