




Chains for food packaging machinery

# 杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852  
Fax:0086-571-88844378  
E-mail:[oceanindustry@vip.163.com](mailto:oceanindustry@vip.163.com)

电话:0086-571-88842852  
传真:0086-571-88844378  
邮箱:[oceanindustry@vip.163.com](mailto:oceanindustry@vip.163.com)


Grip chains

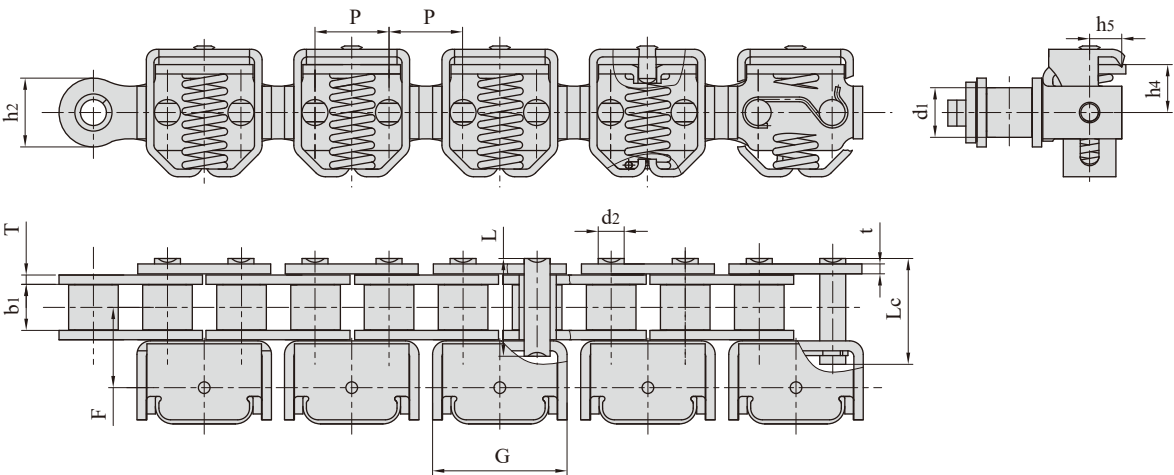


| Chain No. | Pitch | Roller diameter | Width between inner plates | Pin diameter | Pin length |        | Plate depth | Plate thickness | Attachment dimension |     |      |      | Tensile strength | Average tensile strength | Weight per meter |
|-----------|-------|-----------------|----------------------------|--------------|------------|--------|-------------|-----------------|----------------------|-----|------|------|------------------|--------------------------|------------------|
|           | p     | d1 max          | b1 min                     | d2 max       | L max      | Lc max | h2 max      | T/t             | h4                   | h5  | F    | G    | Q min            | Q0                       | q                |
|           | mm    | mm              | mm                         | mm           | mm         | mm     | mm          | mm              | mm                   | mm  | mm   | mm   | kN/lbf           | kN                       | kg/m             |
| 08B-GC    | 12.7  | 8.51            | 7.75                       | 4.45         | 16.7       | 18.2   | 11.8        | 1.60            | 8.5                  | 5.5 | 13.7 | 19.8 | 18.00/4046       | 19.80                    | 1.20             |



## Grip chains

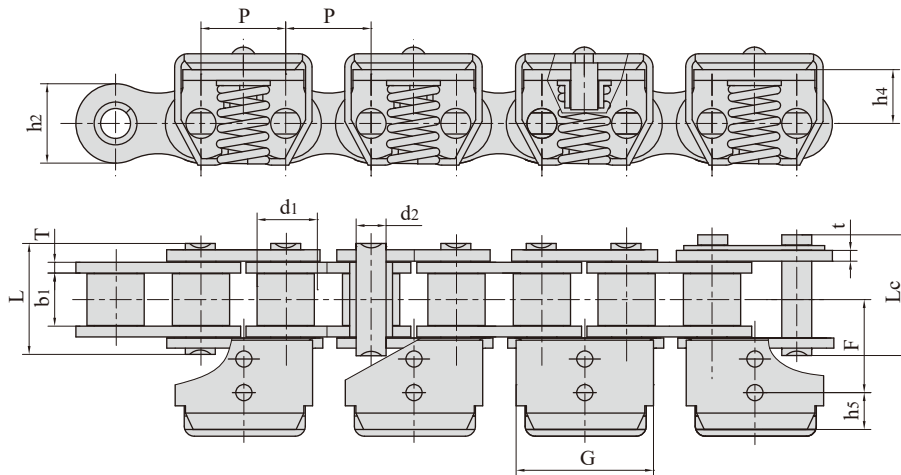

| Chain No. | Pitch | Roller diameter | Width between inner plates | Pin diameter | Pin length |      | Plate depth | Plate thickness | Attachment dimension |     |      |      | Tensile strength | Weight per meter |
|-----------|-------|-----------------|----------------------------|--------------|------------|------|-------------|-----------------|----------------------|-----|------|------|------------------|------------------|
|           | P     | d1 max          | b1 min                     | d2 max       | L max      | Lc   | h2 max      | T/t             | h4                   | h5  | F    | G    | Qmin             | q                |
|           | mm    | mm              | mm                         | mm           | mm         | mm   | mm          | mm              | mm                   | mm  | mm   | mm   | kN/lbf           | kg/m             |
| 08BSSF32  | 12.7  | 8.51            | 7.75                       | 4.45         | 16.7       | 18.2 | 11.8        | 13.8            | 8.0                  | 6.5 | 13.8 | 20.4 | 12.0/2727        | 1.14             |

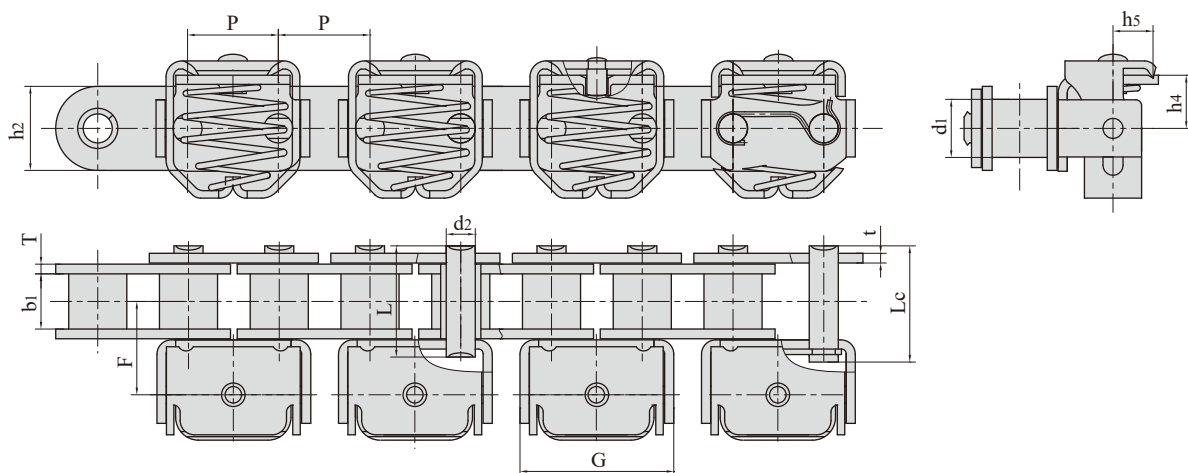

| Chain No. | Pitch  | Roller diameter | Width between inner plates | Pin diameter | Pin length |        | Plate depth | Plate thickness | Attachment dimension |     |      |      | Tensile strength | Average tensile strength | Weight per meter |
|-----------|--------|-----------------|----------------------------|--------------|------------|--------|-------------|-----------------|----------------------|-----|------|------|------------------|--------------------------|------------------|
|           | P      | d1 max          | b1 min                     | d2 max       | L max      | Lc max | h2 max      | T/t             | h4                   | h5  | F    | G    | Qmin             | Q0                       | q                |
|           | mm     | mm              | mm                         | mm           | mm         | mm     | mm          | mm              | mm                   | mm  | mm   | mm   | kN/lbf           | kN                       | kg/m             |
| 10B-GC    | 15.875 | 10.16           | 9.65                       | 5.08         | 19.3       | 20.7   | 14.7        | 1.70            | 9.0                  | 7.0 | 16.4 | 16.9 | 22.40/5036       | 24.64                    | 1.60             |