




Profile machining centre SBZ 122/64

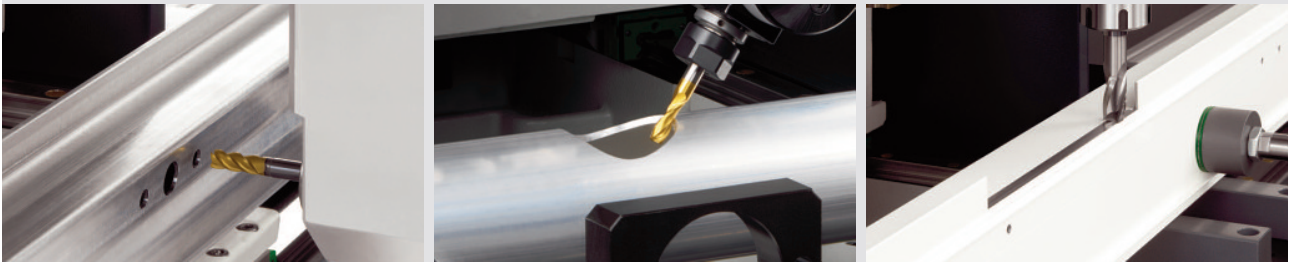

- > For the processing of extra long profiles on five sides
- > Profile processing of up to 6.70 m length
- > The Power-Torque cutting spindle enables processing of thick-walled profiles, tapping is possible
- > The operation in two working zones with alternating loading of the working zones, e.g. for doors, enables a production increase of 30% as sections can be loaded or unloaded from one zone while processing continues in the other
- > The automatic clamp position movement is included as standard which saves precious working time in case of frequently changing profile lengths
- > Mobile operation terminal
- > eluCam (Easy and direct programming on the machine)

Technical information

- > Travelling distance X-axis 6700 mm
V_{max.} 60 m/min.
- > Travelling distance Y-axis 350 mm
V_{max.} 30 m/min.
- > Travelling distance Z-axis 280 mm
V_{max.} 30 m/min.
- > Spindle speed 24000 r.p.m.
- > Power output at spindle max. 7 kW, S 1
- > Power supply 400 V, 3 -, 50 Hz, 26 A
- > Compressed air supply > 7 bar
- > Length 8450 mm, width 3400 mm, height 2560 mm, weight 3400 kg






Optional

- > Additional automatic tool changer
- > Additional tool positions for max. 40 tools
- > Automatic profile length measuring
- > Cutting spindle cooling device
- > Network connection PC control
- > Tool holders
- > Collet holders
- > Collets
- > Tools
- > eluCad (The software package for optimised production management)

For further information please contact:

- > elumatec GmbH | Pinacher Straße 61 | D 75417 Mühlacker
- > Tel. +49 (0)7041 14-266 | Fax +49 (0)7041 14-282 | sales@elumatec.de

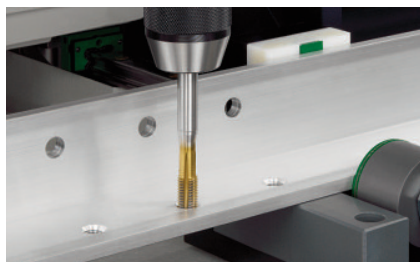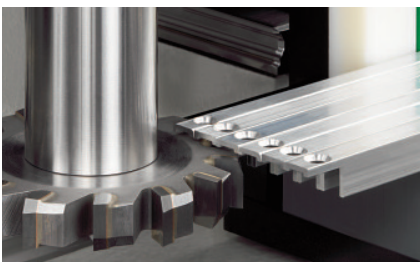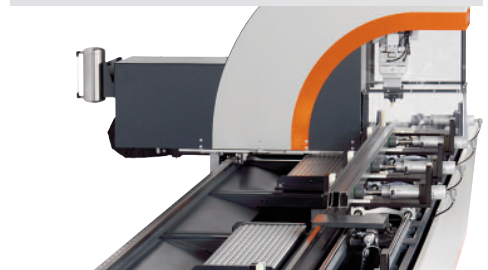

The right to make alterations is reserved