



Leading Manufacturer of

Passenger Lift / Elevators, Goods Elevators, Home Elevators, Automobile Elevators, Hospital Elevators, Capsule Elevators, Residential Elevators, Industrial Elevators, Elevators Door, Hydraulic Lift, Dumbwaiter Lift / Kitchen Elevators



Click To Whatsapp



Click To Call
0120-3245556



Click To Mail





Click To Website




Welcome to **Fine-Tech Elevator & Escalators Co.**, where we're dedicated to revolutionizing the vertical transportation industry with a commitment to excellence, innovation, and safety. Our mission is to redefine the way people move, delivering cutting-edge elevator solutions tailored to meet the unique needs of our diverse clientele. With a team of seasoned professionals, we leverage the latest advancements in technology to provide comprehensive services including installation, maintenance, modernization, and consultation.

- Quality material
- 24/7 sales support
- Fixed price no bargaining


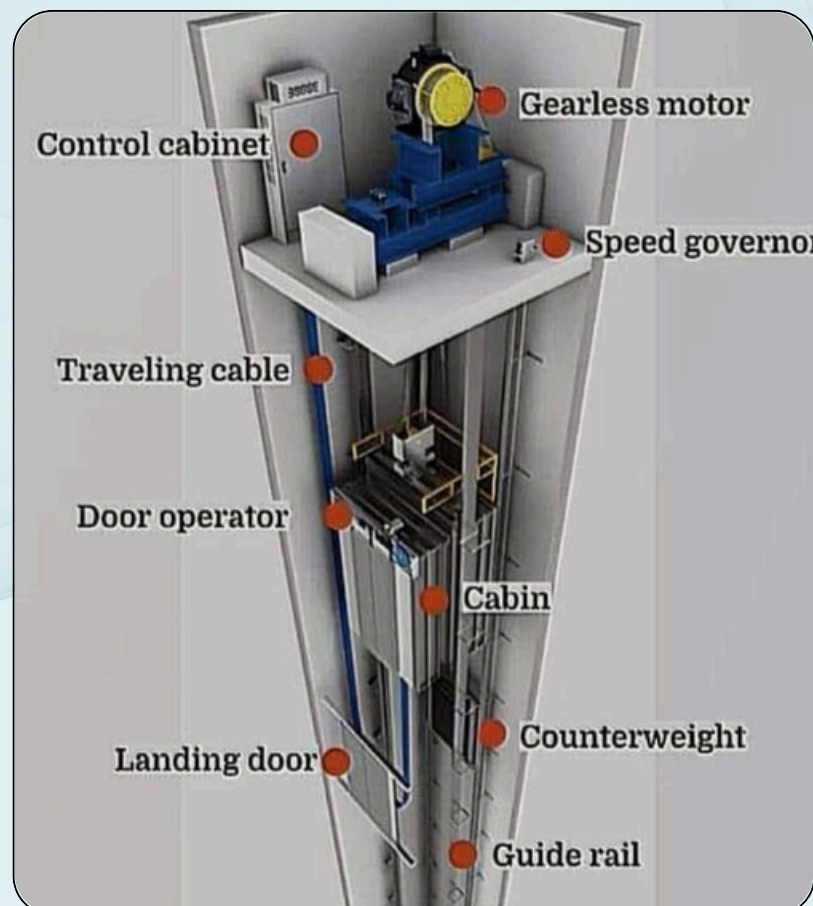
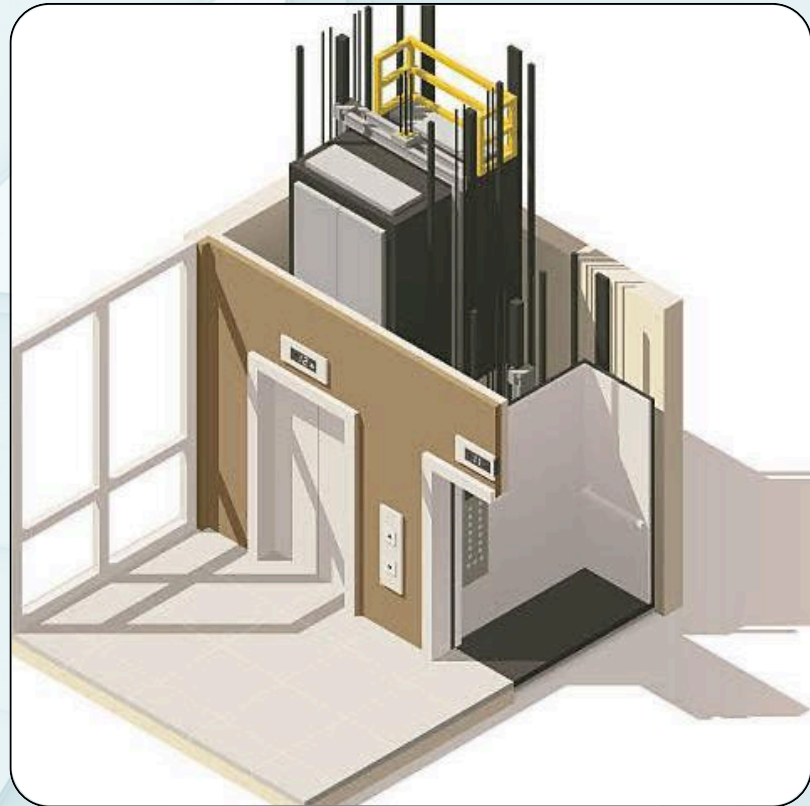




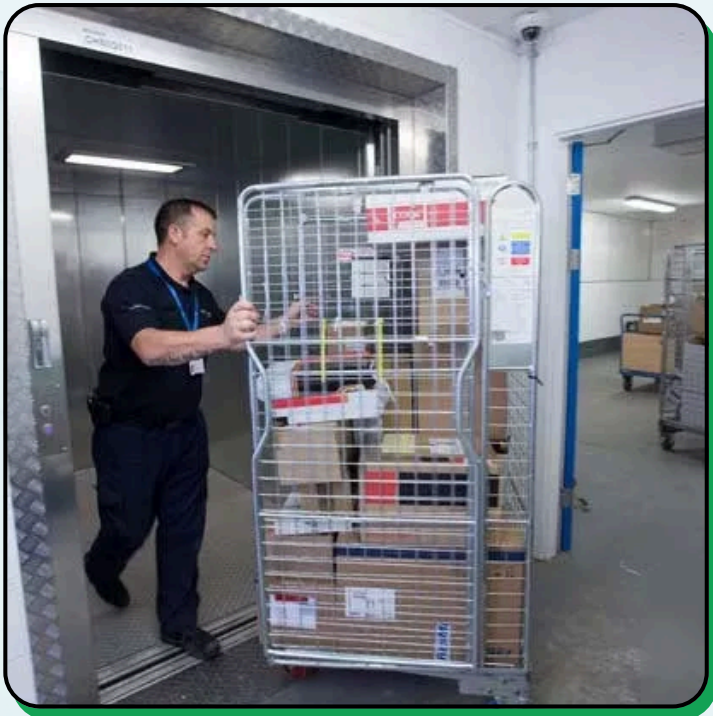




Automobile Elevators

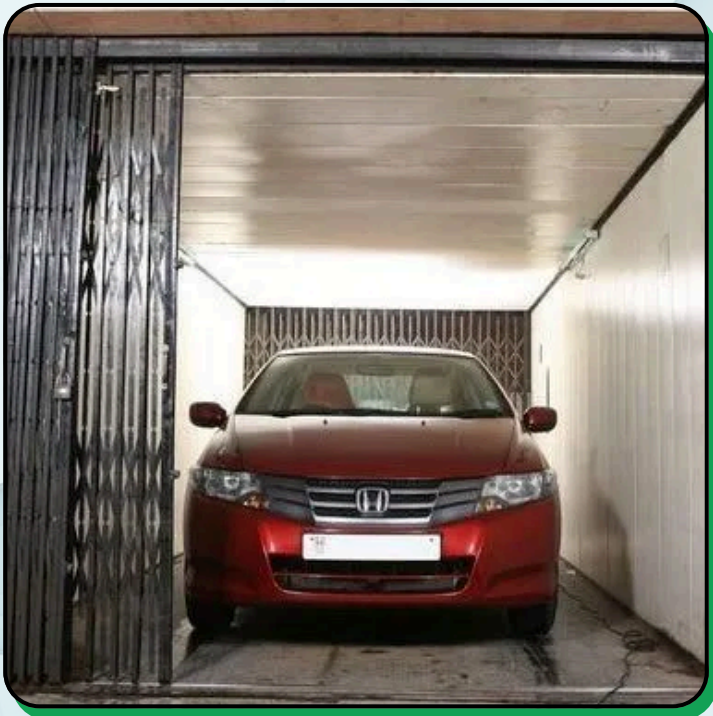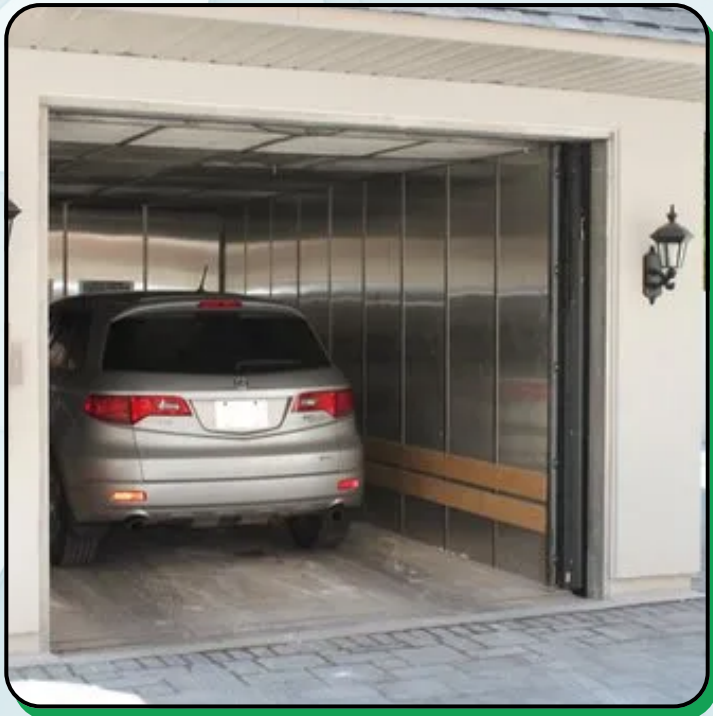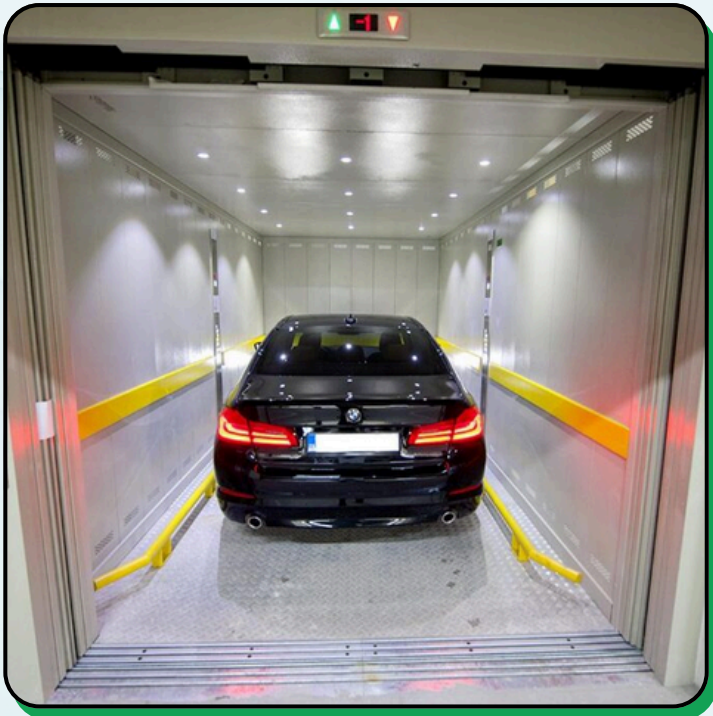




Capsule Elevators



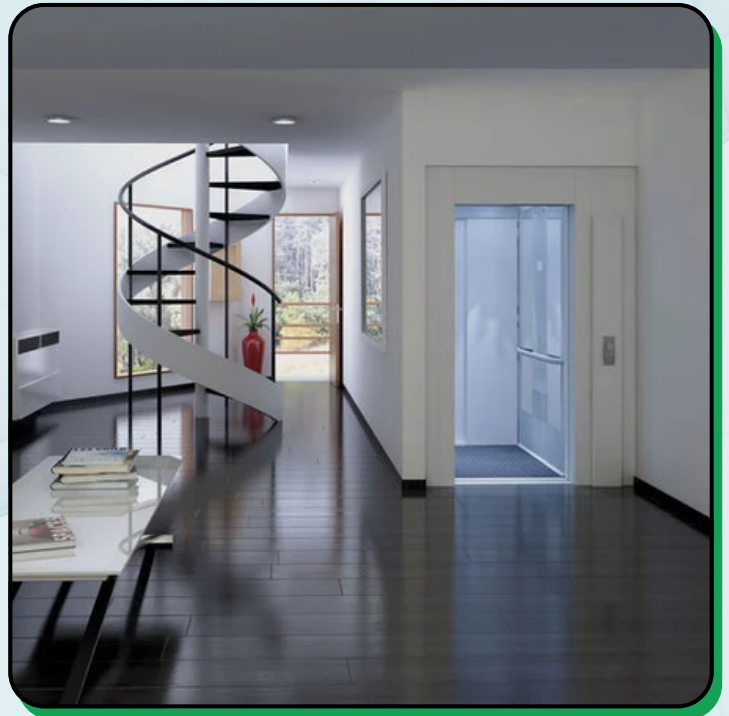

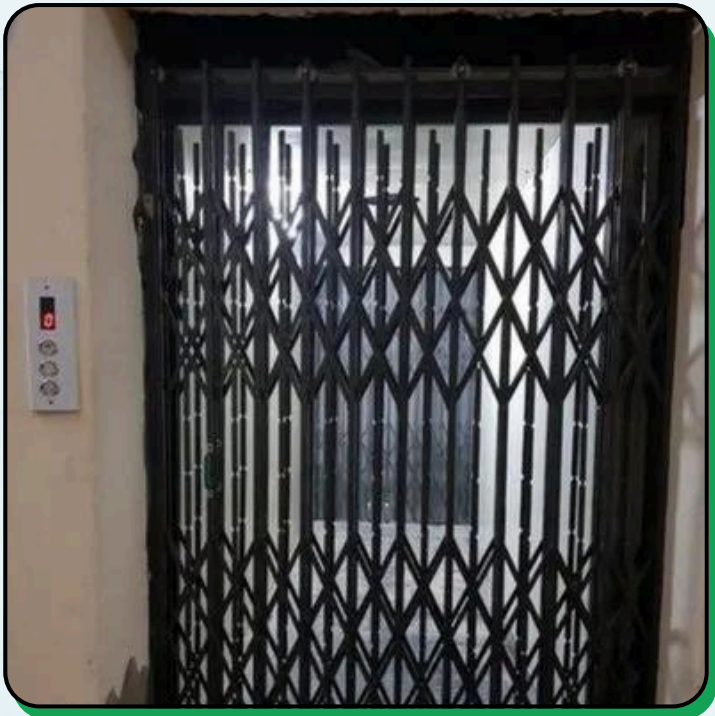



Automatic Golden
SS Glass Door



Manual
Collapsible

Door



Manual Swing
Glass Door



Manual Golden SS
Glass Door



SS Automatic Small
Vision Center Opening
Door



Automatic SS
Telescopic Door



Automatic Center
Opening Powder Coated
Door



Manual
Imperforated Door



Automatic SS
Simple Door




Dumbwaiter Lift / Kitehen Elevators



RTG 24P 06



Technical Specifications	
Voltage:	380 V
Pole:	24
Duty Cycle:	S3 40%
Brake Voltage:	230 VAC/110 VDC
MaxStaticLoad:	2500 kg

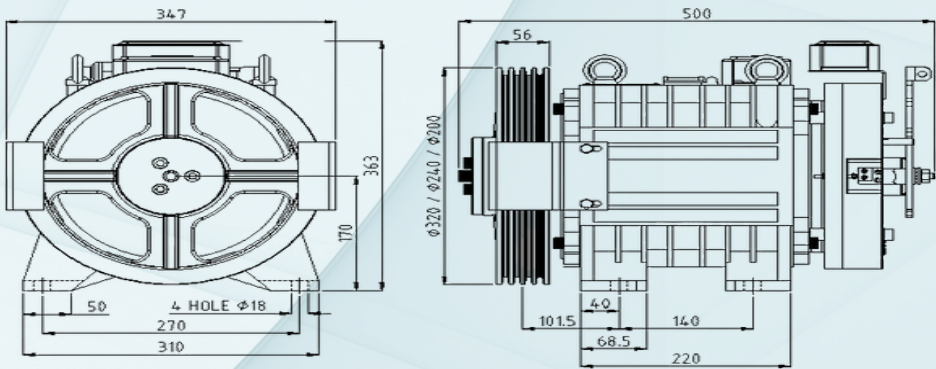

Model No.	RTG 24 P 0606 A-320
Max. Duty Load (Kg.)	408
Max. Passenger Capacity	6
Max. Speed (m/s)	0.50
Sheave Dia (mm)	320
Ratio of Roping	2:1
No. of Ropes	4
Rope Dia. (mm)	8
Current (A)	8.0
Power (kw)	1.4
RPM	60
Torque (NM)	220
Frequency (Hz)	12.0
IP Protection	IP 41
Start / Hr.	180
Machine Weight (kg) Appx	155


WYJ103-08 2:1

Block brake PM gearless traction machine 450-630kg



Type	WYJ103-08.1/1.0-1.75			
Traction Ratio	2:1			
Rated voltage(V)	380			
Rated load(kg)	450	630		
Max. axis load(kg)	2200			
Self weight(kg)	270			
Rated speed(m/s)	1.0	1.0	1.5	1.6/1.75
Wheel diameter(mm)	Φ340			
Rope groove	5-Φ8			
L1 (mm)	66.5			

- Using the block brake, low noise, low temperature rise, low current, quick response time for power failure and reliable braking
- Adapt different inverters, position sensors
- Motor with outer rotor structure, low noise, low vibration, low temperature rise, high efficiency and energy saving, and with small starting current
- Compact structure, suitable for MR and MRL, passenger elevator

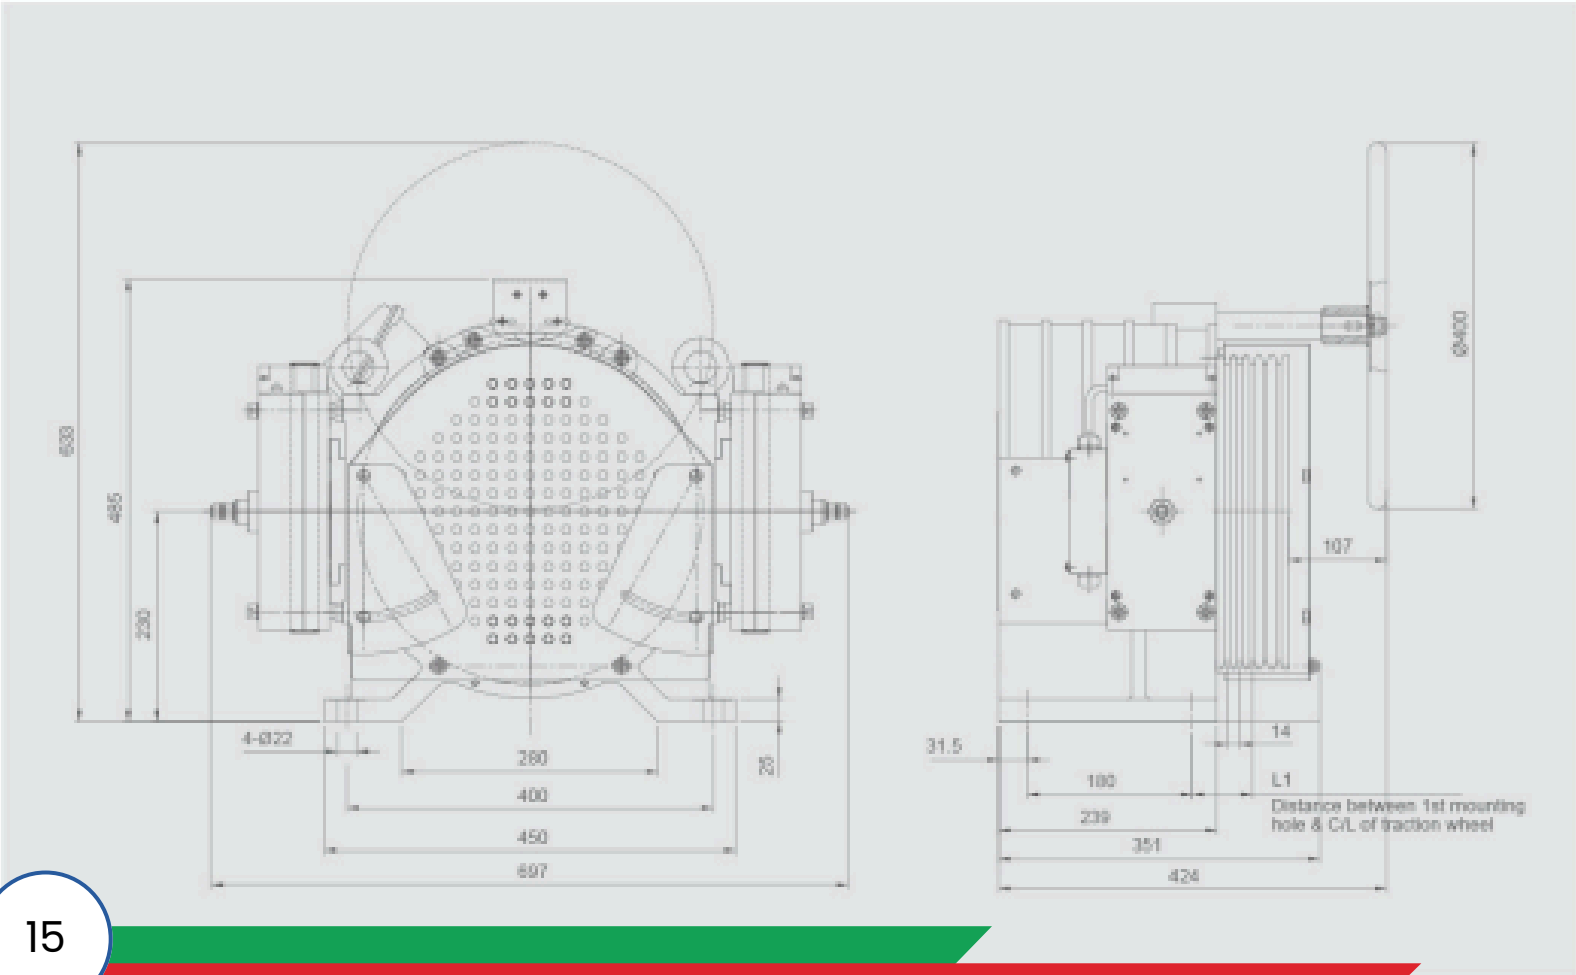



WYJ103-04 1:1

Drum brake PM gearless traction machine 1000kg



Type	WYJ103-04.3/1.0~2.5				
Traction Ratio	1:1				
Rated voltage(V)	380				
Rated load(kg)	1000				
Max. axis load(kg)	9000				
Self weight(kg)	850				
Rated speed(m/s)	1.0	1.5	1.6/1.75	2.0	2.5
Wheel diameter(mm)	Φ560				
Rope groove	6-Φ12				

- Using traditional drum brake, mature and reliable technology, convenient adjustment and widely using
- Motor with inter rotor structure, low noise, low vibration, smooth operation, high power factor, with quick response time and high reliability
- Adapt different inverters, position sensors
- Large loading capacity, suitable for the modernization of existing elevator

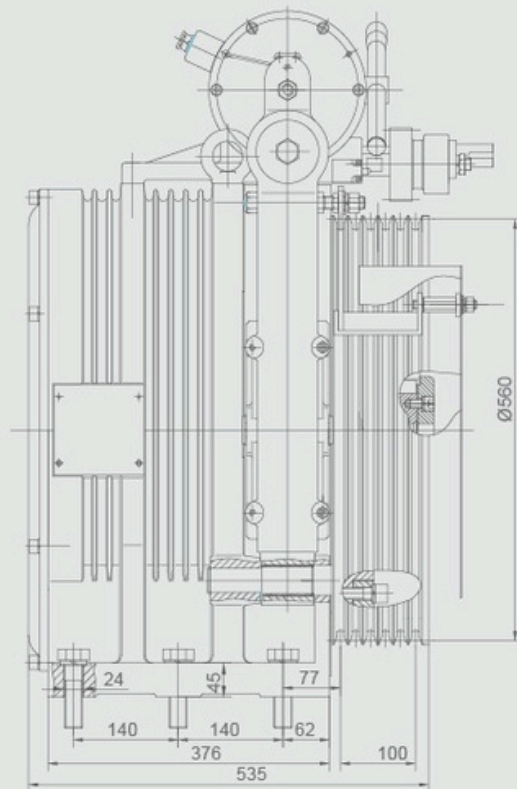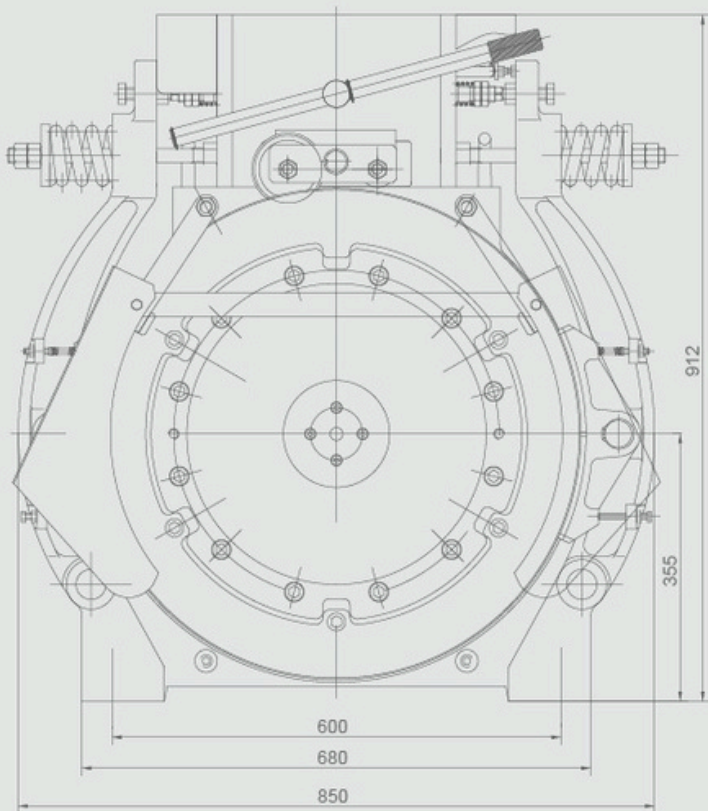


MMR SERIES



Persons	Capacity (kg)	Door opening width (mm)	Rated speed (m/s)	Over head OH (mm)	Pit depth PD (mm)
6	408	800	1.0	4200	1400
8	544	800	1.0	4200	1400
			1.6	4400	1500
			1.75	4400	1500
12	800	800	1.0	4200	1400
			1.6	4400	1500
			1.75	4400	1500
			2.0	4600	1600
			2.5	4800	1800
15	1000	900	1.0	4350	1400
			1.6	4500	1500
			1.75	4500	1500
			2.0	4700	1600
			2.5	4900	1800
18	1250	1100	1.0	4500	1400
			1.6	4650	1600
			1.75	4660	1600
			2.0	4800	1700
			2.5	5000	1900
20	1350	1100	1.0	4500	1400
			1.6	4650	1600
			1.75	4660	1600
			2.0	4800	1700
			2.5	5000	1900
23	1600	1100	1.0	4600	1400
			1.6	4800	1600
			1.75	4800	1600
			2.0	4900	1700
			2.5	5150	1900

- Advanced technology, smooth start, quiet moving
- Permanent magnet synchronous gearless traction machine
- High precision positioning control system
- Top advanced door operator system
- Various finishing for selection

MRL SERIES

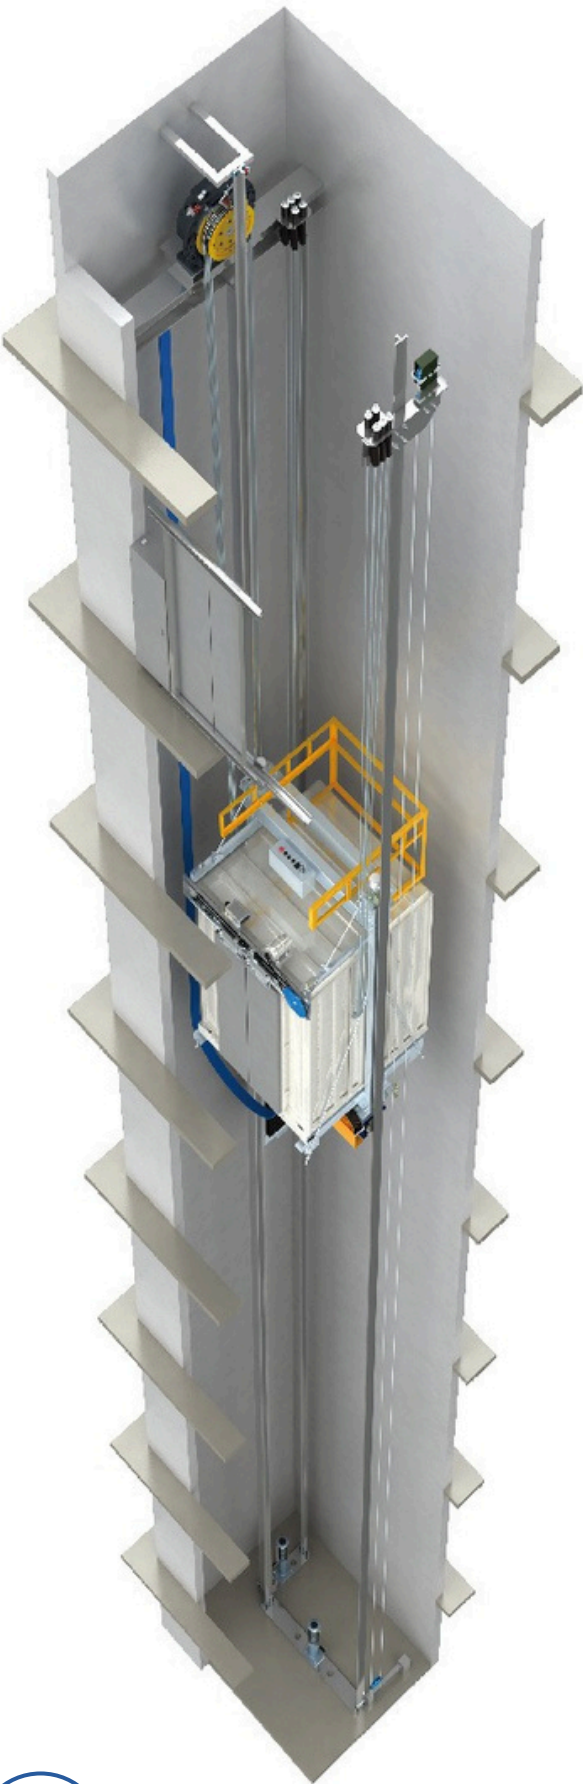

Persons	Capacity (kg)	Door opening width (mm)	JJ	Rated speed (m/s)	Over head OH (mm)	Pit depth PD (mm)
6	408	800		1.0	3700	1400
8	544	800		1.0	3900	1400
				1.6	4000	1700
				1.75	4215	1750
12	800	800		1.0	3900	1400
				1.6	4000	1700
				1.75	4150	1750
13	900	900		1.0	3900	1400
				1.6	4000	1700
				1.75	4150	1750
15	1000	900		1.0	3900	1400
				1.6	4000	1700
				1.75	4150	1750
20	1350	1100		1.0	4000	1500
				1.6	4200	1700
				1.75	4300	1800
23	1600	1100		1.0	4000	1500
				1.6	4200	1700
				1.75	4300	1750

- Creative MRL structure increased the utilization of building space, reduced the elevator impact of the outer looking of the building, and enabled the building design and arrangement more flexible
- Size minimized controller
- Bottomless lop is easy for installation
- Energy saving led lighting
- Durable button with visible background lighting



Address

A-95, Rampuri, Surya Nagar, Ghaziabad, Uttar Pradesh 201011

Call Now : 0120-3245556, +91-8510004730, +91-8510004731

Email : finetechelevator@gmail.com

www.finetechelevator.in