



FERRYL[®]
Anticorrosive Products



FERRYL WIRE ROPE LUBRICATOR

One-step wire rope greasing


- Protect wire core
- Faster greasing of wires
- Efficient and consistent application
- Reduce waste
- Extend wire life and safety

FERRYL WIRE ROPE LUBRICATOR

Quick and efficient completion of all wire-rope maintenance tasks


Three steps in one:

1. Easy cleaning & pre-treatment
2. Superior internal lubrication
3. Consistent external protection

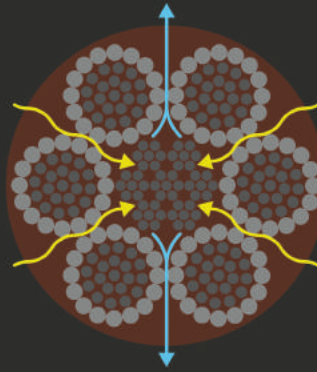

Pressure forces grease into the wire core

Water and moisture is forced out

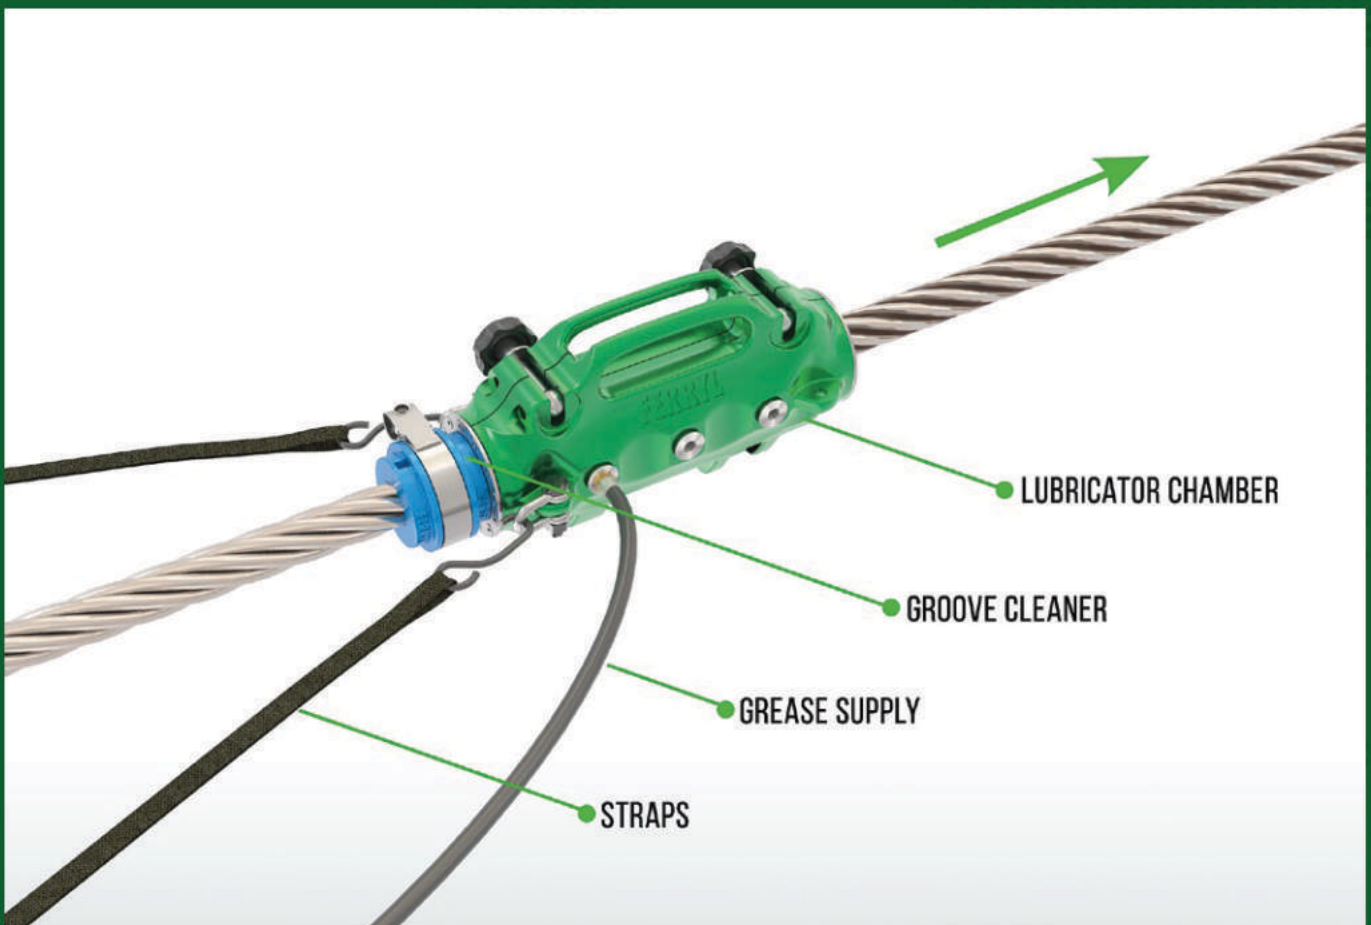

Ideal for all types of wires:

- Crane Wires
- Hoist Wires
- Luffing Wires
- Mooring Wires
- Towing Wires
- Ramp Wires




FEATURES



Lightweight aluminium lubricating chamber



Carry case

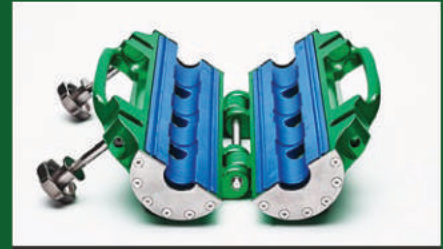

Set of seals for specific wire diameter



Self retracting ratchet straps for attaching chamber



Set of scraper plates for specific wire diameter



Spare set of seals

SPECIFICATIONS

Pressure	up to 400 bar
Grease output	up to 4.5kg / min
Lubrication speed	up to 40 m / min
Grease intake	NLGI 0 to 3
Power input	Air 0 to 10 Bar

Wire Size	1 to 50 mm
Material	Anodised aluminium alloy
Length	450 mm
Weight	4.5 kg
Connection	6 x 1/2" Female BSP

Values are based on use in conjunction with Ferryl 202 Standard Anticorrosive Grease and the Ferryl Pump Unit and may vary with other pumps and lubricants

- High pressure forces grease into the wire core
- Consistent, uniform application
- Reduce re-greasing needs by up to 70%
- Reduce waste and environmental impact
- Reduce application time by up to 90%

OPTIONAL EXTRAS

Groove cleaner:

- Made for specific wire size and construction to ensure optimal cleaning
- Removes up to 90% of old grease, dirt and debris to improve penetration of new grease into the wire core
- Simultaneous cleaning and greasing of wire



COMPLEMENTARY PRODUCTS

The Ferryl Wire Rope Lubricator has been designed for use with:



Ferryl Pump Unit

- Air powered
- 43:1 pump
- Pneumatic ram press
- High pressure and output
- Easy control
- Faster lubrication
- Consistent application

High performance pump unit for optimal grease transfer from the container to the wire.

The Ferryl Pump Unit makes pumping of the grease as easy as possible. A steady, controlled flow of grease to the lubricating chamber ensures best results.



Ferryl 202 Standard Anticorrosive Grease

- Penetration
- High Melting Point
- Rust Inhibitors
- Rubberised Binders
- Semi-Drying Film
- Lubrication

Wire rope grease specially designed for wires at sea. A unique formulation combines superior adhesion with excellent lubrication and rust protection.

ALSO AVAILABLE



Ferryl Wire Rope Lubricator XL

For wire-rope diameters
50 to 90 mm

ER CHEMINDO
TEKNIK KARYA

sales@erchemindo.com
www.erchemindo.com
www.ferryl.com

+62 858 8236 6127
+62 21 390 5967

ABOUT FERRYL



Ferryl was founded in Sweden in 1955 with the goal of developing better rust protection and maintenance products for the shipping industry. With an established expertise in wire rope maintenance, Ferryl has now expanded to include state-of-the-art application equipment as a superior alternative to manual application.

Today Ferryl products are manufactured at Ferryl Deutschland GmbH in Germany, which is also where the Ferryl Lubricator has been developed. Ferryl Sales Ltd on the Isle of Man is the centre for worldwide sales. With a global network of agents, Ferryl products are sold and stocked in ports worldwide.