

TKI-LL1400U / TKI-LL1200U / TKI-LL910U

13,000 ANSI lms WUXGA 5,000,000:1

11,000 ANSI lms WUXGA 5,000,000:1

9,000 ANSI lms WUXGA 5,000,000:1



Ultra High Brightness Installation type LCD Laser Projector with Excellent Color and Cost-effectiveness

Excellent Performance and Versatile Functions

□ Long-life Eco-friendly Laser Source

- Long Lifetime : 30,000 hours (ECO)
- Clear Image by High Brightness Source
- Mercury-free and Eco-friendly

□ 4K High Resolution Support

- Support Resolution : VGA~4K

□ The Best Brightness and Contrast Ratio

- Brightness : 9,000~13,000 ANSI lms
- Contrast Ratio : 5,000,000:1

□ Various Input/Output Support

- HDMI x2 / RGB x1
- Audio / USB
- RJ45 / RS232
- HDBaseT

□ Diverse Option Lenses

- Standard (Motorized / Manual)
- Middle / Long
- Short / Ultra Short Throw


□ Versatile Convenience Features

- Network Control / Display
- User Logo Screen, Security, etc.

Easy Installation and Maintenance

□ Powerful Keystone Function

- Support various surface with 6 Corners, Curved Correction, Grid Correction, etc



4 Corners




Horizontal/Vertical



Pincushion/Barrel



6 Corners



Grid Correction (187 points)

□ Edge Blending


- Panoramic Image Support

□ Excellent Anti-dust System

- Longer Device and Light Source Life Time


□ Tilt Free

- 360° Free Installation



□ Lens Shift

- Vertical 60%(-10~+50%)
- Horizontal ±20%




Ultra High Brightness LCD Laser Projector with Excellent Color


TKI-LL1400U 13,000 ANSI lms WUXGA 5,000,000:1

TKI-LL1200U 11,000 ANSI lms WUXGA 5,000,000:1

TKI-LL910U 9,000 ANSI lms WUXGA 5,000,000:1

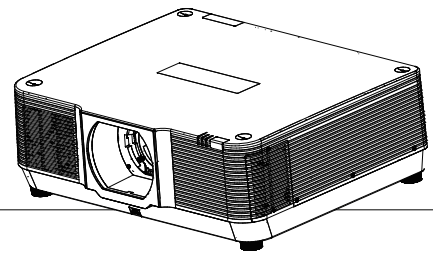

Terminals

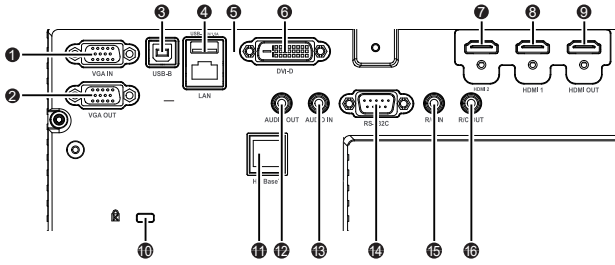

- ① VGA IN ② VGA OUT ③ USB-B IN ④ USB-A IN ⑤ LAN ⑥ DVI-D IN ⑦ HDMI 1 IN ⑧ HDMI 2 IN ⑨ HDMI OUT ⑩ Kensington Lock ⑪ HDBaseT ⑫ AUDIO OUT ⑬ AUDIO IN ⑭ RS232C ⑮ R/C IN ⑯ R/C OUT

Projection Distance (16:10)

※ Distance unit : m

Option Lens	TK-OLS	TK-OLPS	TK-OLPUST
Type	Standard	Standard	Ultra short throw
Zoom/Focus	Manual	Motorized	Motorized
F	1.7~2.37	1.7~2.0	2.0
f	24.4~48.6	21.8~49.8	6.27
Throw Ratio	1.46~2.95:1	1.3~3.02:1	0.32:1
Screen Size	40~500 inch	50~500 inch	97~400 inch
Performance	40~200 inch	80~200 inch	100~350 inch
50 inch	1.53~3.04	1.38~3.22	-
80 inch	2.53~5.08	2.24~5.18	0.07~0.55
100 inch	3.17~6.36	2.81~6.49	0.09~0.69
150 inch	4.78~9.57	4.23~9.76	0.45~1.06
200 inch	6.38~12.78	5.66~13.03	0.82~1.42
250 inch	7.99~15.99	7.08~16.29	1.18~1.79
300 inch	9.60~19.19	8.51~19.56	1.55~2.15
400 inch	12.82~25.61	11.36~26.10	2.28~2.88
500 inch	16.03~32.03	14.21~32.36	-

Option Lens	TK-OLPST	TK-OLPLT	TK-OLPULT
Type	Short throw	Long throw	Ultra long throw
Zoom/Focus	Motorized	Motorized	Motorized
F	1.7~2.37	1.7~2.0	2.0
f	24.4~48.6	21.8~49.8	6.27
Throw Ratio	0.79~1.11:1	2.99~5.93:1	4.59~7.02:1
Screen Size	50~500 inch	50~500 inch	60~500 inch
Performance	80~200 inch	80~200 inch	80~200 inch
50 inch	0.83~1.17	3.29~6.44	-
80 inch	1.35~1.90	5.18~10.23	7.95~12.18
100 inch	1.70~2.39	6.44~12.77	9.99~15.27
150 inch	2.58~3.61	9.60~19.10	15.08~23.01
200 inch	3.44~4.83	12.80~25.43	20.17~30.74
250 inch	4.31~6.05	15.91~31.76	25.25~38.48
300 inch	5.18~7.26	19.06~38.09	30.34~46.21
400 inch	6.91~9.70	25.37~50.75	40.52~61.68
500 inch	8.65~12.14	31.68~63.41	50.70~77.15

※ All measurements are approximate and may vary from the actual size(±7%)

Specification

Model	TKI-LL1400U	TKI-LL1200U	TKI-LL910U
Brightness	13,000 ANSI lms	11,000 ANSI lms	9,000 ANSI lms
Panel	Projection	LCD	
	Type	3x0.76"	
	Resolution	WUXGA	
	Support	4K	
Contrast Ratio	5,000,000:1		
Aspect Ratio	16:10 (4:3 Compatible)		
Light Source	Type	Laser	
	Mode	Boost, Normal, ECO	
	Lifetime	Normal 20,000 Hours / ECO 30,000 Hours	
Lens	Screen Size	40"~500"	
	Throw Ratio	1.3~3.02:1	
	Zoom/Focus	Auto (optical 2.3x / Digital 33x)	
	F	1.7~2.0	
I/O	f	21.8~49.8mm	
	Lens Shift	V 60% / H ±20%	
	Keystone	V	±30° (Auto+Manual)
H		±30° (Manual)	
Support		Pincushion/Barrel, 4 Corners, 6 Corners, Grid	
I/O	IN	2x HDMI 1x VGA (15pin Mini D-sub RGB) 1x DVI-D 1x Audio (3.5mm stereo mini jack) 1x RJ45 (Display) 1x USB A (5V/1.5A) 1x USB B (Display) 1x HDBaseT 1x HD-SDI (3G-SDI)	
	OUT	1x VGA (15pin Mini D-sub RGB) 1x Audio (3.5mm stereo mini jack) 1x HDMI	
	Control	1x RS232C (D-sub 9pin) 1x RJ45 (Control) 1x USB B (Upgrade) 2x Remote (IN/OUT)	
Misc. Functions	Auto Ceiling, Auto Keystone, Freeze, Blank, Mute, Auto Search, Auto Suspend, Auto PC Setup, etc.		
Noise	35 dB (Normal) / 29 dB (ECO)		
Temperature	5°C~40°C		
Rated Voltage	100~240V@50/60Hz		
Power Consumption	520W		
Standby Power	<0.5W		
Dimension	600 x 503 x 218 mm		
Weight	24 Kg		

Best in Class + Cost Effective
Cost Effective e-Whiteboard
Future Education Environment
Durable Charging Cabinet

Twokey® Projector
Twokey® Canvas
Twokey® System
Twokey® Cabinet

Twokey® Projector
THAILAND

มาตรฐานผลิตภัณฑ์
ประเทศไทย
STANDARD OF SOUTH KOREA

โปรดเกล้าฯ
อย่างเป็นทางการในประเทศไทย

บริษัท เทคโนโลยี อิมมูตี จำกัด | TECH INFINITY EDUCATION CO., LTD.
เลขที่บัญชีภาษี (TAX ID) : 0105564121880
สำนักงานใหญ่ (HQ) : เลขที่ 1 อาคารเอ็มโพร์ ชั้น 47 ถนนสุขุมวิท 4703 ถนนสุขุมวิท
แขวงวัฒนา เขตสาทร กรุงเทพมหานคร 10120 ประเทศไทย