


Product Datasheet

100G QSFP28 SR4 Transceiver

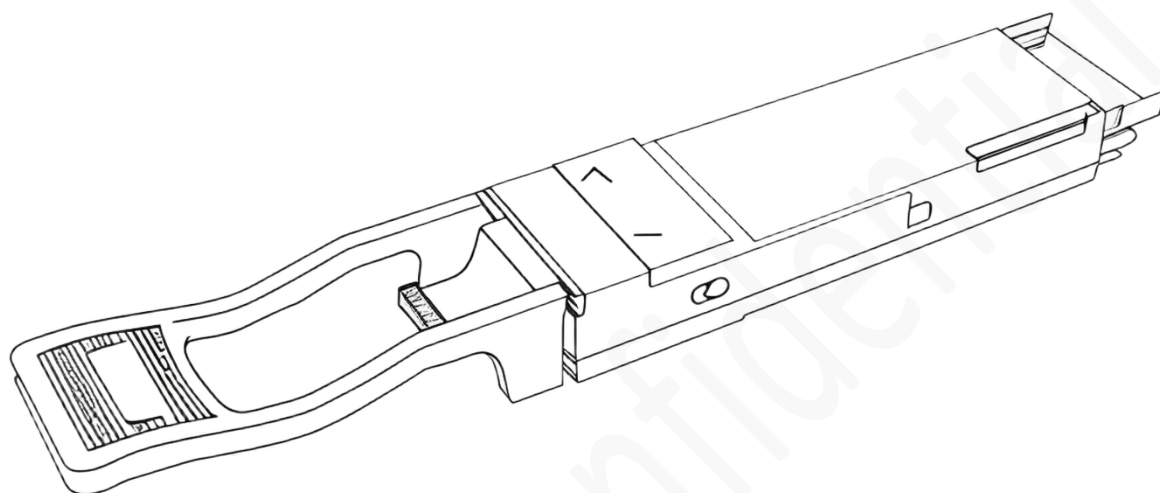

Application

- Data center & Networking Equipment
- Servers/Storage Devices
- High Performance Computing (HPC)
- Switches/Routers
- Telecom Central Offices (CO)
- Test and Measurement Equipment

1.0 Product Specification

1.1 Absolute Maximum Ratings (TC=25°C, unless otherwise noted)

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings will cause permanent damage and/or adversely affect device reliability.

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Storage Temperature	TS	-40	-	+85	°C	
Maximum Supply Voltage	V _{CC}	-0.5	-	3.6	V	
Operating Relative Humidity	RH	5	-	95	%	No condensation
Control Input Voltage	V _I	-0.3	-	V _{CC} +0.5	V	

1.2 General Specifications (Tc=25°C, unless otherwise noted)

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Operating Case Temperature	T _{OPR}	0	-	70	°C	
Power Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Maximum Power Dissipation	P _D	-	-	3.5	W	
Signaling Rate per Lane	SRL	-	25.78125	-	Gb/s	
Operating Distance (MMF@OM3)	-	-	-	70	m	
Operating Distance (MMF@OM4)	-	-	-	100	m	


1.3 Transmitter Characteristics (TC=25°C, unless otherwise noted)

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Center Wavelength	λ_c	840	850	860	nm	
RMS Spectral width	$\Delta\lambda$			0.6	nm	
Average Launch Power, each lane		-6.2	-	4	dBm	
Optical Modulation Amplitude	OMA	-4.2	-	3	dBm	
Launch power in OMA minus TDECQ		-5.6	-	-	dBm	
Average Output Power (Laser Turn off)		-	-	-30	dBm	
Extinction Ratio	ER	3	-	-	dB	
Transmitter and dispersion eye closure (TDECQ), each lane	TDECQ	-	-	4.5	dB	
TDECQ – $10\log_{10}(C_{eq})$, each lane				4.5	dB	
Optical Return Loss Tolerance	ORLT	-	-	12	dB	

1.4 Receiver Characteristics (TC=25°C, unless otherwise noted)

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Center Wavelength	λ_c	840	850	860	nm	
Damage threshold		5	-	-	dBm	
Average receive power, each lane		-8.4		4	dBm	
Receive power, each lane (OMAouter)			-	3	dBm	
Receiver sensitivity (OMAouter), each lane	Rx_sen			-6.5	dBm	
LOS Assert	LOS _A	-20	-	-	dBm	
LOS De-Assert	LOS _D	-	-	-9	dBm	
LOS Hysteresis	LOS _H	0.5	-	5	dB	

1.5 PIN Descriptions

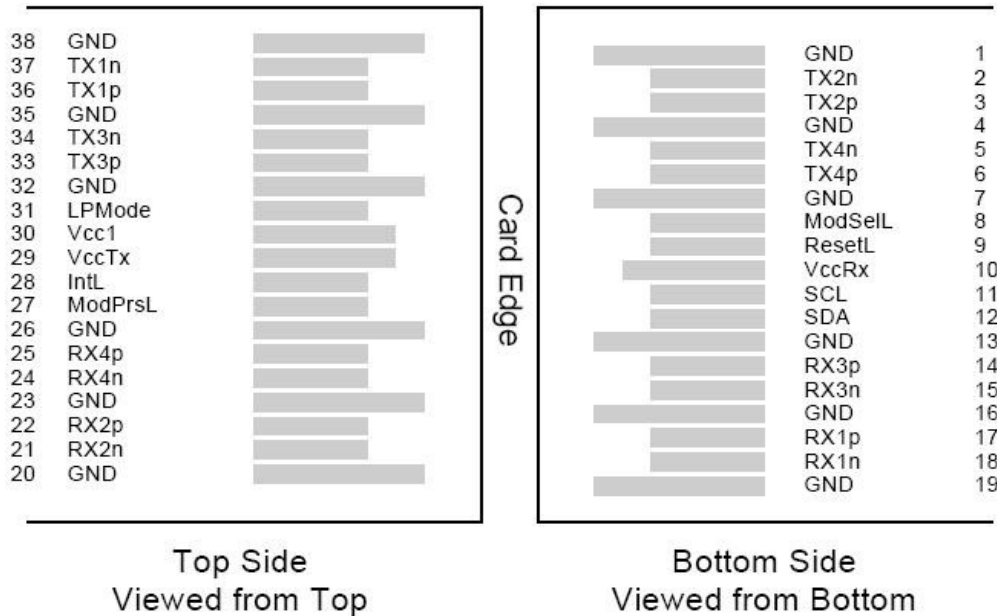

Pin	Symbol	Name/Description	Ref.
1	GND	Ground	
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data Input	
4	GND	Ground	
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data Input	
7	GND	Ground	
8	ModSelL	Module Select	
9	ResetL	Module Reset	
10	Vcc Rx	+3.3 V Power supply receiver	
11	SCL	2-wire serial interface clock	
12	SDA	2-wire serial interface data	
13	GND	Ground	
14	Rx3p	Receiver Non-Inverted Data Output	
15	Rx3n	Receiver Inverted Data Output	
16	GND	Ground	
17	Rx1p	Receiver Non-Inverted Data Output	
18	Rx1n	Receiver Inverted Data Output	

19	GND	Ground	
20	GND	Ground	
21	Rx2n	Receiver Inverted Data Output	
22	Rx2p	Receiver Non-Inverted Data Output	
23	GND	Ground	
24	Rx4n	Receiver Inverted Data Output	
25	Rx4p	Receiver Non-Inverted Data Output	
26	GND	Ground	
27	ModPrsL	Module Present	
28	IntL	Interrupt	
29	Vcc Tx	+3.3 V Power supply transmitter	
30	Vcc1	+3.3 V Power Supply	
31	LPMODE	Low Power Mode	
32	GND	Ground	
33	Tx3p	Transmitter Non-Inverted Data Input	
34	Tx3n	Transmitter Inverted Data Input	
35	GND	Ground	
36	Tx1p	Transmitter Non-Inverted Data Input	
37	Tx1n	Transmitter Inverted Data Input	
38	GND	Ground	

2.0 Product Information

Data Rate	Factor		Optical	Wavelength	Reach
100G	QSFP28	SR4	MPO	850nm	100m

ESD Safety Cautionsy

This transceiver is specified as ESD threshold 1KV for high speed data pins based on Human Body Model per ANSI/ESDA/JEDECJS-001. The units are subjected to 15kV air discharges during operation and 8kV direct contact discharges to the case. However, normal ESD precautions are still required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.

Important Notice

The performance figures, data, and any illustrative material presented in this datasheet are typical and must be explicitly confirmed in writing by Quantex before they are deemed applicable to any specific order or contract.

By Quantex's policy of continuous improvement, specifications may change without prior notice. The publication of information in this datasheet does not imply exemption from patent or other protective rights held by Quantex or other parties.

E-mail: sales@quantextech.com

Official Site: www.quantextech.com

3.0 Revision Record

Rev.	Comments	Date
A01	Initial Release	2025/05/16