


## **Product Datasheet**

### **25G SFP28 SR Transceiver**

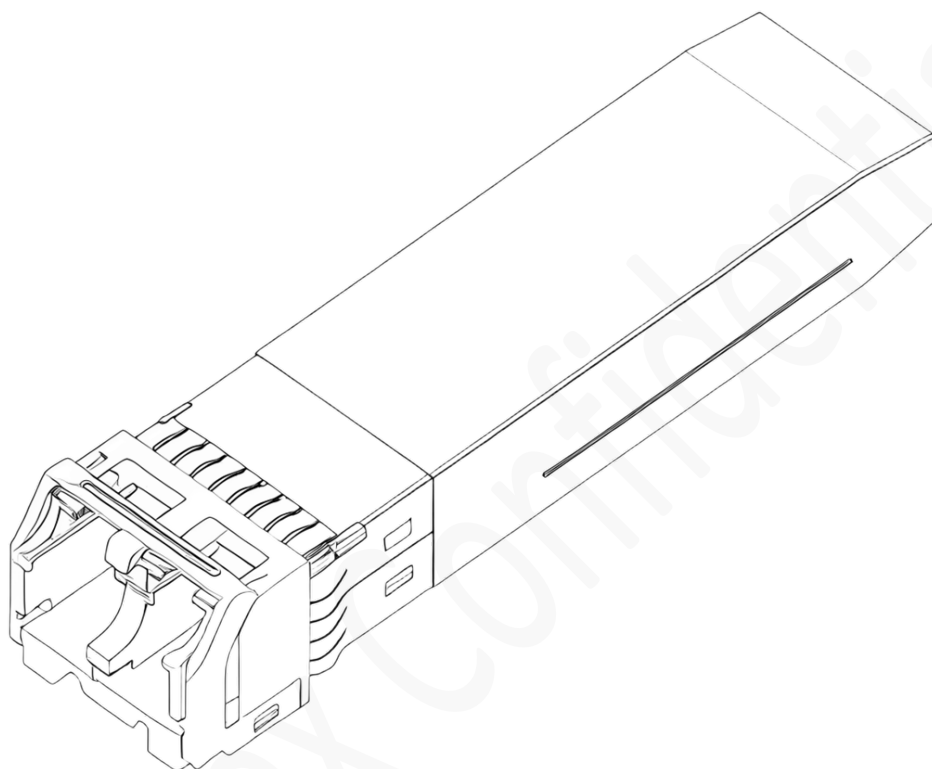

### **Application**

- Data center & Networking Equipment
- Servers/Storage Devices
- High Performance Computing (HPC)
- Switches/Routers
- Telecom Central Offices (CO)
- Test and Measurement Equipment

## 1.0 Product Specification

### 1.1 Absolute Maximum Ratings (TC=25°C, unless otherwise noted)

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings will cause permanent damage and/or adversely affect device reliability.

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Storage Temperature	TS	-40	-	+85	°C	
Maximum Supply Voltage	VCC	-0.5	-	3.6	V	
Operating Relative Humidity	RH	5	-	95	%	No condensation
Control Input Voltage	VI	-0.3	-	VCC+0.5	V	

### 1.2 General Specifications (Tc=25°C, unless otherwise noted)


Parameter	Symbol	Min	Typical	Max	Unit	Notes
Operating Case Temperature	T <sub>OPR</sub>	0	-	70	°C	
Power Supply Voltage	V <sub>CC</sub>	3.135	3.3	3.465	V	
Maximum Power Dissipation	P <sub>D</sub>	-	-	3.5	W	
Signaling Rate per Lane	SRL	-	25.78125	-	Gb/s	
Operating Distance (MMF)	-	-	-	100	m	

### 1.3 Optical Characteristics (TC=25°C, unless otherwise noted)

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
<b>Transmitter</b>						
Output Opt. Pwr	POUT	-9.1		2.4	dBm	1
Optical Wavelength	$\lambda$	840	850	860	nm	
Spectral Width (RMS)	$\sigma$			0.6	nm	
Optical Extinction Ratio	ER	3.0			dB	
RIN	RIN			-128	dB/Hz	
<b>Receiver</b>						
Rx Sensitivity	RSENS			-11	dBm	2
Input Saturation Power (Overload)	Psat	2.4			dBm	
Wavelength Range	$\lambda_c$	770	850	860	nm	
LOS De -Assert	LOSD			-13	dBm	
LOS Assert	LOSA	-30			dBm	
LOS Hysteresis		0.5			dB	

1. Class 1 Laser Safety per FDA/CDRH and IEC-825-1 regulations.
2. Measured with a PRBS  $2^{31}-1$  test pattern, @25.78Gb/s, BER<10<sup>-12</sup>

## 1.4 PIN Descriptions

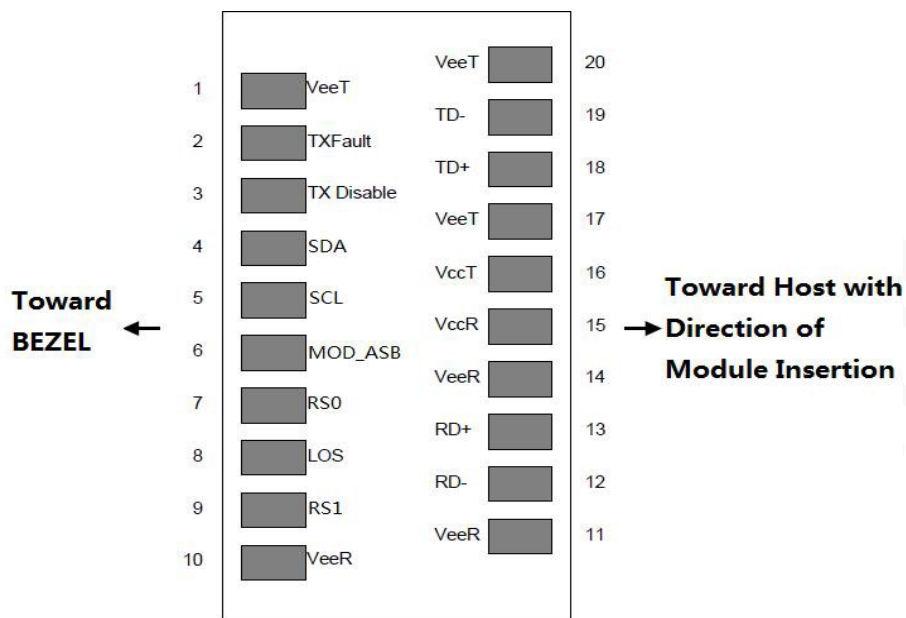

Pin	Symbol	Name/Description	Notes
1	VeeT	Transmitter Ground	
2	Tx_Fault	Transmitter Fault - High indicates a fault condition	
3	Tx_Disable	Transmitter Disable - High or open disables the transmitter	
4	SDA	2-wire Serial Interface Data Line (MOD-DEF2)	
5	SCL	2-wire Serial Interface Clock (MOD-DEF1)	
6	MOD_ABS	Module Absent, connected to VeeT or VeeR in the module	
7	RS0	Rate Select 0 - Not used, Presents high input impedance	
8	RX_LOS	Receiver Loss of Signal(LVTTL-O). Logic 0 indicates normal operation	
9	RS1	Rate Select 1 - Not used, Presents high input impedance	
10	VeeR	Receiver Ground	
11	VeeR	Receiver Ground	
12	RD-	Inverse Received Data out	
13	RD+	Received Data out	
14	VeeR	Receiver Ground	

15	VccR	Receiver Power Supply	
16	VccT	Transmitter Power Supply	
17	VeeT	Transmitter Ground	
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VeeT	Transmitter Ground	

## 2.0 Product Information

Data Rate	Factor		Optical	Wavelength	Reach
25G	SFP28	SR	LC	850nm	100m

### ESD Safety Cautionsy

This transceiver is specified as ESD threshold 1KV for high speed data pins based on Human Body Model per ANSI/ESDA/JEDECJS-001. The units are subjected to 15kV air discharges during operation and 8kV direct contact discharges to the case. However, normal ESD precautions are still required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.

### Important Notice

The performance figures, data, and any illustrative material presented in this datasheet are typical and must be explicitly confirmed in writing by Quantex before they are deemed applicable to any specific order or contract.

By Quantex's policy of continuous improvement, specifications may change without prior notice. The publication of information in this datasheet does not imply exemption from patent or other protective rights held by Quantex or other parties.

E-mail: [sales@quantextech.com](mailto:sales@quantextech.com)

Official Site: [www.quantextech.com](http://www.quantextech.com)

## 3.0 Revision Record

Rev.	Comments	Date
A01	Initial Release	2025/05/16