



CATALOGUE 2K25

INDOOR | OUTDOOR | INDUSTRIAL | COMMERCIAL



WE EXPERIMENT SO LIFE BECOMES SIMPLER FOR YOU

We innovate not to isolate you from technology, but to make our technology feel more empathetic. We create products that understand and respond to your needs. Our intensive research and development are what make us the leading power and home electrical specialists; We do whatever it takes to find the most effective lighting solutions, with our customer's best interests at the heart of it.

BECAUSE YOUR DAY HAS A RANGE OF DIFFERENT MOMENTS.

When it comes to our intuitive products, we don't just innovate, we pre-empt your every possible need. Our extensive range of LED lighting will ensure you find exactly what you're looking for, no matter which corner of your home it's for. With the goodness of unwavering, effective and glare-free lighting, our LED Lighting conserve up to 85% energy while assuring lifelong brightness, hassle-free performance, and custom brightness distribution. Here's to lighting that feels like home which are proudly made in India.



WIDE RANGE OF LIGHTING




WHEN WE CREATE, WE HAVE YOU BOTH IN
OUR MINDS AND HEARTS.



Doesn't it feel great to be understood? We understand that some days a smile is all it takes to light up a room, while other days call for a more gentle and mellow mood. We know that romance demands the opposite of bright lighting, yet mood lighting doesn't work when you need to focus.

LED FLOOD LIGHT

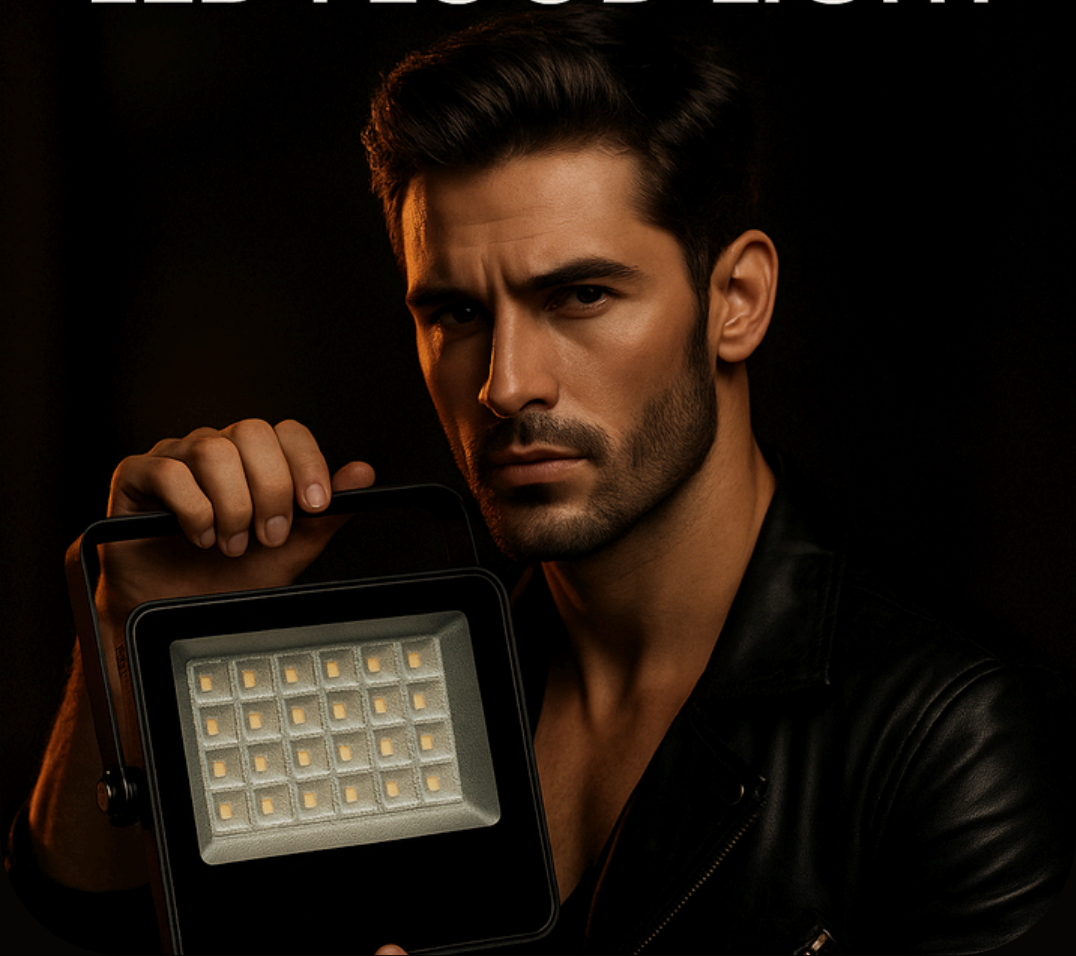

FLOOD LIGHT SLIM MODEL

POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
30W	3600	80	180 X 180 X 50MM	W/WW/NW	16
50W	6000	80	210 X 210 X 60MM	W/WW/NW	14
100W	12000	80	270 X 280 X 55MM	W/WW/NW	10
150W	18000	80	330 X 300 X 60MM	W/WW/NW	06
200W	24000	80	370 X 340 X 70MM	W/WW/NW	04
250W	30000	80	370 X 340 X 70MM	W/WW/NW	04
300W	35000	80	370 X 340 X 70MM	W/WW/NW	02

MATERIAL: HOUSING ALUMINUM DIE CASTING
GLASS: TOUGHENED
LED: 150 LM/WATT, 1w 9v LED
DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F
<0.9
OPERATING VOLTAGE: 90V TO 300V ,IP66
WORKING TEMPERATURE: 20DEG TO 50DEG



LED FLOODLIGHT LENS MODEL

POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
50W (72LED)	6000	90	215 X 200 X 55MM	W/WW/NW	14
100W (120LED)	12000	90	285 X 275 X 60MM	W/WW/NW	10
200W (240W)	24000	90	340 X 335 X 65MM	W/WW/NW	04

MATERIAL: HOUSING ALUMINUM DIE CASTING

FRAMING: LENS

LED: 150 LM/WATT, 1W 9V LED

DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F
<0.9

OPERATING VOLTAGE: 90V TO 300V ,IP66

WORKING TEMPERATURE: 20DEG TO 50DEG



FLOOD LIGHT (BACK CHOKE)



POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
300W	36000	80	359 X 260 X 80MM	W/WW/NW	02
400W	48000	80	440 X 340 X 80MM	W/WW/NW	02
500W	60000	80	440 X 340 X 80MM	W/WW/NW	01
600W	72000	80	580 X 430 X 70MM	W/WW/NW	01

MATERIAL: HOUSING ALUMINUM DIE CASTING

GLASS: TOUGHENED

LED: 150 LM/WATT, 1W 9V LED

DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F
<0.9

OPERATING VOLTAGE: 90V TO 300V ,IP66

WORKING TEMPERATURE: 20DEG TO 50DEG

STREET LIGHT LENS MODEL

MODEL	POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
LSL66-24	24W	2880	80	290 X 100 X 55MM	W/WW/NW	18
LSL66-36	36W	4320	80	340 X 125 X 55MM	W/WW/NW	18
LSL66-50	50W	6000	80	390 X 142 X 55MM	W/WW/NW	15
LSL66-72	72W	8640	80	390 X 142 X 55MM	W/WW/NW	15
LSL66-100	100W	12000	80	445 X 165 X 55MM	W/WW/NW	10

MATERIAL: HOUSING ALUMINUM DIE CASTING

FRAMING: LENS

LED: 150 LM/WATT, 1W 9V LED

DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F

<0.9

OPERATING VOLTAGE: 90V TO 300V ,IP66

WORKING TEMPERATURE: 20DEG TO 50DEG

STREET LIGHT GLASS MODEL



MODEL	POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
LSL63-12	12W	1500	80		W/WW/NW	20
LSL63-20	20W	1650	80		W/WW/NW	18
LSL63-30	30W	5400	80		W/WW/NW	12
LSL63-40	40W	4000	80		W/WW/NW	10
LSL63-45	45W	4950	80		W/WW/NW	10
LSL63-60	60w	7800	80		W/WW/NW	10
LSL63-100	100w	12000	80		W/WW/NW	06

MATERIAL: HOUSING ALUMINUM DIE CASTING
GLASS: TOUGHENED
LED: 150 LM/WATT, 1W 9V LED
DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F
<0.9
OPERATING VOLTAGE: 90V TO 300V ,IP66
WORKING TEMPERATURE: 20DEG TO 50DEG





LED FLOOD LIGHT (HEAVY BODY)

MODEL	POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
LFL94-300	300		90		W/WW/NW	10
LFL94-400	400		90		W/WW/NW	10
LFL94-500	500		90		W/WW/NW	10
LFL94-600	600		90		W/WW/NW	10
					W/WW/NW	10

2 X 2 PANEL LIGHTS

POWER	MOUNTING TYPE	SYSTEM LUMEN	CRI	DIMENSION	COLOUR	PKG PCS
36W	RECESSED	3600	90	595 X 595MM	W/WW/NW	06
48W	RECESSED	4800	90	595 X 595MM	W/WW/NW	06
36W	SURFACE	3600	90	575 X 57MM	W/WW/NW	06
48W	SURFACE	4800	90	600X 600MM	W/WW/NW	06



Impact & Scratch
Protection*



Long Life
Technology



Special Coating
Resists Oil*



Eco Friendly



Anti Shatter*



Energy Saving



ZOOM TRACK LIGHT

POWER	SYSTEM LUMEN	CRI	SIZE	COLOUR	PKG PCS
10W	1200	80	50 X 130MM	W/WW/NW	30
20W	2400	80	60 X 150MM	W/WW/NW	20
30W	3600	80	75 X 180MM	W/WW/NW	20
50W	6000	80	80 X 190MM	W/WW/NW	12

BEAM ANGLE 36*



RAFALE COB



POWER	SHAPE	SYSTEM LUMEN	CRI	DIMENSION	COLOUR	PKG PCS
07W	ROUND	840	90	53 X 70MM	W/WW/NW	40
12W	ROUND	1440	90	68 X 80MM	W/WW/NW	30
18W	ROUND	2160	90	75 X 100MM	W/WW/NW	20
24W	ROUND	2880	90	75 X 100MM	W/WW/NW	15

*Reflector colors: Rose Gold/ Gunmental Black

*Body Colors: White/Black



LED PANEL LIGHT

POWER	SHAPE	SYSTEM LUMEN	CRI	DIMENSION	COLOUR	PKG PCS
08W	ROUND/SQUARE	840	90	53 X 70MM	W/WW/NW	60
12W	ROUND/SQUARE	1440	90	68 X 80MM	W/WW/NW	50
15W	ROUND/SQUARE	1600	90	75 X 90MM	W/WW/NW	50
22W	ROUND/SQUARE	2400	90	75 X 100MM	W/WW/NW	30



Impact & Scratch
Protection*



Long Life
Technology



Special Coating
Resists Oil*




Eco Friendly



Anti Shatter*



Energy Saving

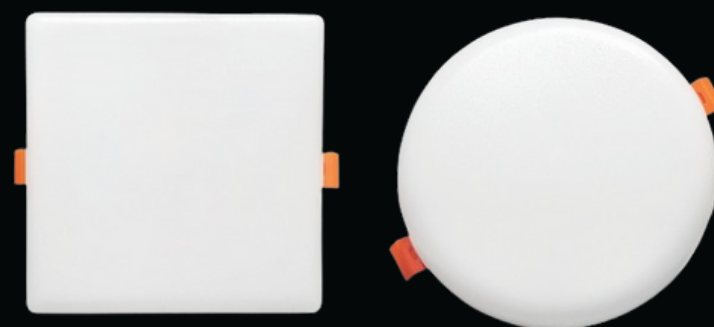

SURFACE PANEL

LSRP 07

POWER	SHAPE	SYSTEM LUMEN	CRI	CUT SIZE	COLOUR	PKG PCS
15W	ROUND/SQUARE	1500	80	60MM-100MM	W/WW/NW 3in1	40
22W	ROUND/SQUARE	2200	80	60MM-150MM	W/WW/NW 3in1	30



DEEP DOWNLIGHT PANEL (ROUND)



POWER	SHAPE	CRI	SPECIFICATION	CUTTING	COLOUR	PKG PCS
LDL27-12W	ROUND	80	Φ120MM	Φ115MM	W/WW/NW	40
LDL27-18W	ROUND	80	Φ155MM	Φ145MM	W/WW/NW	30
LDL27-24W	ROUND	80	Φ175MM	Φ165MM	W/WW/NW	20

COB TILTABLE

POWER	SHAPE	SYSTEM LUMEN	CRI	CUTOUT X HEIGHT	COLOUR	PKG PCS
LDL-33 6W	ROUND	600	90	50 X 40MM	W/WW/NW	40
LDL-33 12W	ROUND	1200	90	70 X 55MM	W/WW/NW	40
LDL-33 20W	ROUND	2000	90	90 X 65MM	W/WW/NW	30
LDL-33 30W	ROUND	3000	90	110 X 70MM	W/WW/NW	16
LDL-33 50W	ROUND	5000	90	150 X 115MM	W/WW/NW	16



COB REGULAR MODEL

MODEL	POWER	SHAPE	SYSTEM LUMEN	CRI	CUTOUT X HEIGHT	COLOUR	PKG PCS
LDL23-6W	6W	ROUND	400	90	50 X 40MM	W/WW/NW	40
LDL23-12W	12W	ROUND		90		W/WW/NW	30
LDL23-20W	20W	ROUND		90		W/WW/NW	20
LDL23-30W	30W	ROUND		90		W/WW/NW	14
LDL23-50W	50W	ROUND		90		W/WW/NW	14

INDUSTRIAL HIGHBAY

 EITOVAA

POWER

MODEL

COLOR

50W

LHB102-50W

WW/NW/WH

100W

LHB102-100W

WW/NW/WH

150W

LHB102-150W

WW/NW/WH

200W

LHB102-200W

WW/NW/WH

POWER

MODEL

COLOR

100W

LHB102-100W UFO

WW/NW/WH

150W

LHB102-150W UFO

WW/NW/WH

200W

LHB102-200W UFO

WW/NW/WH



LITOVAA®

BRIGHTENING UP THE FUTURE....



First Floor F- 342, BLOCK F, Sector 63, Noida
District Gautam Buddha Nagar U.P. 201301

litovaa.in

@litovaa.lighting

litovaaled@gmail.com