



CATALOGUE 2K25



IS: 10322
(PART 5/SEC 5): 2013



R-93034100



IS: 10322
(PART 5/SEC 3): 2012



R-93036153

INDOOR | OUTDOOR | INDUSTRIAL | COMMERCIAL

WE EXPERIMENT SO LIFE BECOMES SIMPLER FOR YOU

We innovate not to isolate you from technology, but to make our technology feel more empathetic. We create products that understand and respond to your needs. Our intensive research and development are what make us the leading power and home electrical specialists; We do whatever it takes to find the most effective lighting solutions, with our customer's best interests at the heart of it.

WHEN WE CREATE, WE HAVE YOU BOTH IN
OUR MINDS AND HEARTS.



Doesn't it feel great to be understood? We understand that some days a smile is all it takes to light up a room, while other days call for a more gentle and mellow mood. We know that romance demands the opposite of bright lighting, yet mood lighting doesn't work when you need to focus.



PRISM LED FLOOD LIGHT (LFL93)

POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
30W	3600	80	180 X 180 X 50MM	W/WW/NW	16
50W	6000	80	210 X 210 X 60MM	W/WW/NW	14
100W	12000	80	270 X 280 X 55MM	W/WW/NW	10
150W	18000	80	330 X 300 X 60MM	W/WW/NW	06
200W	24000	80	370 X 340 X 70MM	W/WW/NW	04
250W	30000	80	370 X 340 X 70MM	W/WW/NW	04
300W	35000	80	370 X 340 X 70MM	W/WW/NW	02
400W	65000	80	500 X 380 X 35MM	W/WW/NW	02

MATERIAL: HOUSING ALUMINUM DIE CASTING

GLASS: TOUGHENED

LED: 150 LM/WATT, 1W 9V LED

DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F
<0.9

OPERATING VOLTAGE: 90V TO 300V ,IP66

WORKING TEMPERATURE: -20DEG TO 50DEG



LED FLOODLIGHT LENS MODEL

POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
LFL81-50W (72LED)	6000	90	215 X 200 X 55MM	W/WW/NW	14
LFL81-100W (120LED)	12000	90	285 X 275 X 60MM	W/WW/NW	10
LFL81-200W (240LED)	24000	90	340 X 335 X 65MM	W/WW/NW	04

MATERIAL: HOUSING ALUMINUM DIE CASTING

FRAMING: LENS

LED: 150 LM/WATT, 1W 9V LED

DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F
<0.9

OPERATING VOLTAGE: 90V TO 300V ,IP66

WORKING TEMPERATURE: -20DEC TO 50DEC

LED FLOOD LIGHT DOB MODEL

POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
LFL95-50W	6000	75	210 X 165 X 27MM	W/WW/NW	40
LFL95-100W	11000	75	270 X 210 X 27MM	W/WW/NW	30
LFL95-150W	17000	75	330 X 250 X 27MM	W/WW/NW	20
LFL95-200W	27000	75	380 X 280 X 27MM	W/WW/NW	10

Voltage: 100-300Vac

Frequency: 50Hz

Power Factor: >0.95 CRI : >75

Beam Angle: 180*

Working Temperature: -20 to 50deg.





LED STREET LIGHT BLAZE SERIES

MODEL	POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
LSL53-90W	90W	11500	80	450x212x45mm	W/WW/NW	5
LSL53-100W	100W	13000	80	450x212x45mm	W/WW/NW	5
LSL53-120W	120W	15000	80	450x212x50mm	W/WW/NW	5
LSL53-150W	150W	19500	80	204x363x45mm	W/WW/NW	3
LSL53-200W	200W	25000	80	204x363x45mm	W/WW/NW	3
LSL53-250W	250W	32000	80	204x363x45mm	W/WW/NW	3
LSL53-300W	300W	38000	80	204x363x45mm	W/WW/NW	2

MATERIAL: HOUSING ALUMINUM DIE CASTING

GLASS: TOUGHENED

LED: 150 LM/WATT, 1w 9V LED

DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F


<0.9

OPERATING VOLTAGE: 150V TO 270V ,IP66

WORKING TEMPERATURE: -20DEG TO 50DEG



STREET LIGHT GLASS MODEL

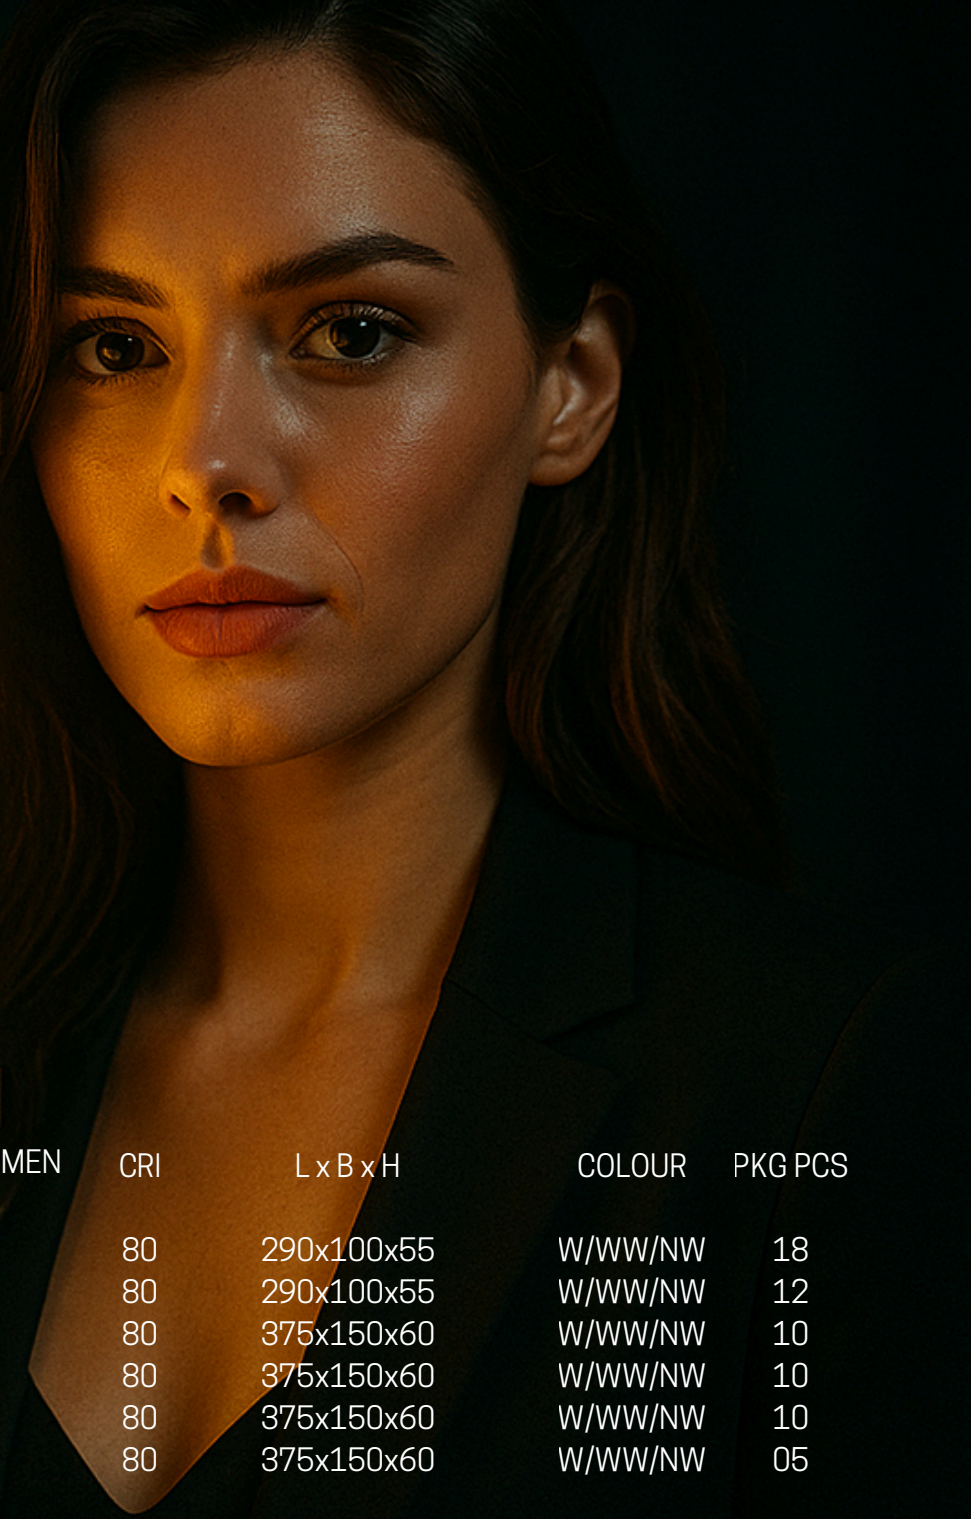

MODEL	POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
IP-66		50W				
LSL63-20	20W	1650	80	290x100x55	W/WW/NW	18
LSL63-30	30W	5400	80	290x100x55	W/WW/NW	12
LSL63-40	40W	4000	80	375x150x60	W/WW/NW	10
LSL63-45	45W	4950	80	375x150x60	W/WW/NW	10
LSL63-50	50w	7800	80	375x150x60	W/WW/NW	10
LSL63-100	100w	12000	80	375x150x60	W/WW/NW	05

MATERIAL: HOUSING ALUMINUM DIE CASTING

GLASS: TOUGHENED

LED: 150 LM/WATT, 1W 9V LED

DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F

<0.9

OPERATING VOLTAGE: 150V TO 270V ,IP66

WORKING TEMPERATURE: -20DEG TO 50DEG

STREET LIGHT LENS MODEL

MODEL	POWER	SYSTEM LUMEN	CRI	L x B x H	COLOUR	PKG PCS
LSL66-24	24W	2880	80	290 X 100 X 55MM	W/WW/NW	18
LSL66-36	36W	4320	80	300 X 125 X 55MM	W/WW/NW	18
LSL66-50	50W	6000	80	390 X 142 X 55MM	W/WW/NW	15
LSL66-72	72W	8640	80	390 X 142 X 55MM	W/WW/NW	15
LSL66-100	100W	12000	80	445 X 165 X 55MM	W/WW/NW	10
LSL66-150	150W	17000	80	460 X 215 X 75MM	W/WW/NW	06
LSL66-200	200W	22000	80	460 X 215 X 75MM	W/WW/NW	06

MATERIAL: HOUSING ALUMINUM DIE CASTING

FRAMING: LENS

LED: 150 LM/WATT, IW 9V LED

DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F

<0.9

OPERATING VOLTAGE: 150V TO 270V ,IP66

WORKING TEMPERATURE: -20DEG TO 50DEG



LED STREETLIGHT SKYLINE

Wattage	Model No	Casting Size	Driver Area (LxWxD)	Color	Packaging Pcs
24 W	LSL69-24	102x255x55 mm	40x85x30 mm	W/WW/NW	24
36 W	LSL69-36W	123x300x55 mm	45x100x30 mm	W/WW/NW	18
50 W	LSL69-50W	142x350x58 mm	60x125x30 mm	W/WW/NW	18
100 W	LSL69-100W	162x395x45 mm	90x140x40 mm	W/WW/NW	12
200 W	LSL69-200W	205x575x70 mm	110x170x60 mm	W/WW/NW	10

LED SOLAR STREET LIGHT



12W | 15W | 18W | 24W | 30W

LED SOLAR STREET LIGHT TECH SPECS.

MODEL	SLS-12W	SLS-15W	SLS-18W	SLS-24W	SLS-30W
Light Power	12W	15W	18W	24W	30W
Battery Type	LiFePo4	LiFePo4	LiFePo4	LiFePo4	LiFePo4
Controller Type	PWM/MPPT	PWM/MPPT	PWM/MPPT	PWM/MPPT	PWM/MPPT
Battery Capacity	12.8V/18Ah	12.8V/18Ah	12.8V/24Ah	12.8V/30Ah	12.8V/42Ah
Solar Module	18V/75Wp	18V/75Wp	18V/75Wp	18V/100Wp	18V/120Wp
Autonomy	1.5 Day	1.5 Day	1.5 Day	1.5 Day	1.5 Day
Operation Time Per/Day	12 Hrs	12 Hrs	12 Hrs	12 Hrs	12 Hrs
Auto Dimming	Multi Functions	Multi Functions	Multi Functions	Multi Functions	Multi Functions
Protections - Battery	Reverse Polarity, Short Circuit, Over Voltage, Under Voltage, Charger - Reverse Polarity				
Protections - Load	Reverse Polarity, Short Circuit, Over Load, Open Circuit				
Light Efficiency (%)	> 95%	> 95%	> 95%	> 95%	> 95%
Motion Sensor	Options	Options	Options	Options	Options
Battery Charging	Green LED	Green LED	Green LED	Green LED	Green LED
Battery Deep Discharge	Red LED	Red LED	Red LED	Red LED	Red LED
LED Type	PHILIPS LUMILEDS, Osram, Bridge Lux etc				
LED Lumen	150 lm/w	150 lm/w	150 lm/w	150 lm/w	150 lm/w
LED Color	CW	CW	CW	CW	CW
Color Temperature	(6500°)K	(6500°)K	(6500°)K	(6500°)K	(6500°)K
Working Life	> 50,000 Hours	> 50,000 Hours	> 50,000 Hours	> 50,000 Hours	> 50,000 Hours
Height of Pole From Ground Level	16.4 feet (5 Meter) 3" Dia				
Pole Type	Gi	Gi	Gi	Gi	Gi
OD dia	76mm	76mm	76mm	76mm	76mm
ID dia	72mm	72mm	72mm	72mm	72mm
LED PCB	MC / 1.6 mm	MC / 1.6 mm	MC / 1.6 mm	MC / 1.6 mm	MC / 1.6 mm
Driver PCB	GP/1.6 mm	GP/1.6 mm	GP/1.6 mm	GP/1.6 mm	GP/1.6 mm
Warranty	5 Years	5 Years	5 Years	5 Years	5 Years



LED FLOOD LIGHT (HEAVY BODY BACK DRIVER)

MODEL	POWER	SYSTEM LUMEN	CRI	L X B X H	COLOUR	PKG PCS
LFL94-300	300W	26000	90	373X273X140	W/WW/NW	02
LFL94-400	400W	65000	90	500X380X35	W/WW/NW	02
LFL94-500	500W	65000	90	500X380X35	W/WW/NW	02
LFL94-600	600W	78000	90	500X380X70	W/WW/NW	01

MATERIAL: HOUSING ALUMINUM DIE CASTING

GLASS: TOUGHENED

LED: 150 LM/WATT, 1W 9V LED 5050

DRIVER: BIS MARK, THD LESS THAN 10% WITH 6KV SURGE PROTECTION P.F
<0.9

OPERATING VOLTAGE: 150V TO 270V ,IP66

WORKING TEMPERATURE: 20DEG TO 50DEG

2 X 2 PANEL LIGHTS

POWER	MOUNTING TYPE	SYSTEM LUMEN	CRI	DIMENSION	COLOUR	PKG PCS
LRM03-36W	RECESSED	3600	90	575 X 597MM	W/WW/NW	06
LRM03-48W	RECESSED	4800	90	575 X 575MM	W/WW/NW	06
LRM04-36W	SURFACE	3600	90	600 X 600MM	W/WW/NW	06
LRM04-48W	SURFACE	4800	90	600X 600MM	W/WW/NW	06



Instant & Switch
Transitions



Long Life
Technology



Special Coating
Resists Oil*



Eco Friendly



Anti Shatter*



Energy Saving



ZOOM TRACK LIGHT

POWER	SYSTEM LUMEN	CRI	SIZE	COLOUR	PKG PCS
10W	1200	80	50 X 130MM	W/WW/NW	30
20W	2400	80	60 X 150MM	W/WW/NW	20
30W	3600	80	75 X 180MM	W/WW/NW	20
50W	6000	80	80 X 190MM	W/WW/NW	12

BEAM ANGLE 36*



RAFALE COB (LDL34)



POWER	SHAPE	SYSTEM LUMEN	CRI	DIMENSION	COLOUR	PKG PCS
07W	ROUND	840	90	53 X 70MM	W/WW/NW	40
12W	ROUND	1440	90	68 X 80MM	W/WW/NW	30
18W	ROUND	2160	90	75 X 100MM	W/WW/NW	20
24W	ROUND	2880	90	75 X 100MM	W/WW/NW	15

*Reflector colors: Rose Gold/ Gunmetal Black

*Body Colors: White/Black

CYLINDER LUXEBEAM

POWER	SHAPE	VOLTAGE	DIMENSION (MM)	COLOR TEMP	PKG PCS.
LDL-35 7W	CYLINDER	165-230v	70X50 MM	W/WW/NW	40
LDL-35 12W	CYLINDER	165-230v	90X70 MM	W/WW/NW	30
LDL-35 20W	CYLINDER	165-230v	11X90 MM	W/WW/NW	30

*Reflectors Colors : Rose gold / Gunmetal black



LED PANEL LIGHT

POWER	SHAPE	SYSTEM LUMEN	CRI	CUT SIZE	COLOUR	PKG PCS
08W	ROUND/SQUARE	840	90	98MM	W/WW/NW/3 in 1	60
12W	ROUND/SQUARE	1440	90	123MM	W/WW/NW	50
15W	ROUND/SQUARE	1600	90	150MM	W/WW/NW/3 in 1	50
22W	ROUND/SQUARE	2400	90	200MM	W/WW/NW	30



Impact & Scratch
Protection*



Long Life
Technology



Special Coating
Resists Oil*



Eco Friendly




Anti Shatter*



Energy Saving



LPP08

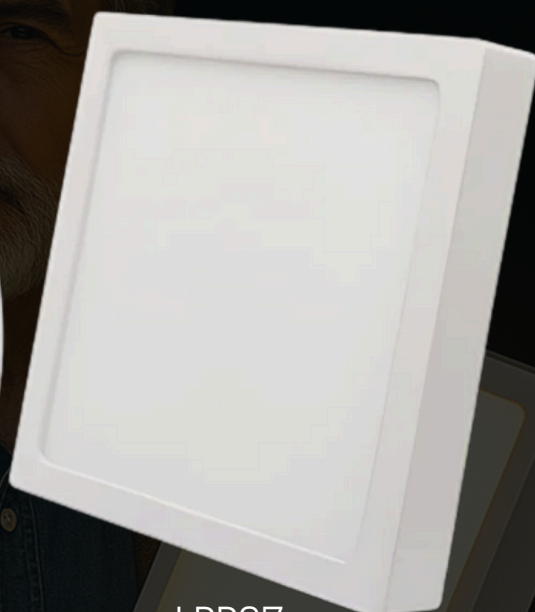

LPP07


LED SURFACE PANEL

POWER	SHAPE	SYSTEM LUMEN	CRI	DIMENSION	COLOUR	PKG PCS
8W	ROUND/SQUARE	800	80	118MM	W/WW/NW/ 3in1	40
15W	ROUND/SQUARE	1500	80	168MM	W/WW/NW/ 3in1	30
22W	ROUND/SQUARE	2200	80	220MM	W/WW/NW	30



COB TILTABLE

POWER	SHAPE	SYSTEM LUMEN	CRI	CUTOUT X HEIGHT	COLOUR	PKG PCS
LDL-33 6W	ROUND	600	90	50 X 40MM	W/WW/NW	40
LDL-33 12W	ROUND	1200	90	70 X 55MM	W/WW/NW	40
LDL-33 20W	ROUND	2000	90	90 X 65MM	W/WW/NW	30
LDL-33 30W	ROUND	3000	90	110 X 70MM	W/WW/NW	16
LDL-33 50W	ROUND	5000	90	150 X 115MM	W/WW/NW	16

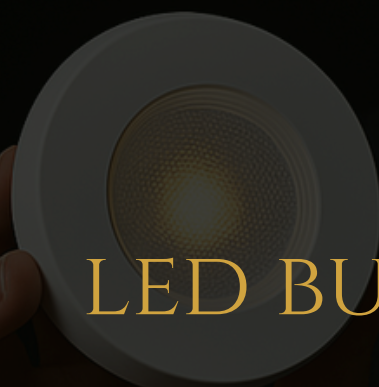

LED BUTTON SPOTLIGHT

POWER	BODY COLOR	SYSTEM LUMEN	CRI	CUT OUT (MM)	COLOR	PKG PCS.
03w	WHITE	360	90	32 MM	W/WW/NW	100



Impact & Scratch
Protection*



Long Life
Technology



Special Coating
Resists Oil*



Eco Friendly



Anti Shatter*



Energy Saving



POWER

MODEL

COLOR

50W	LHB102-50W (WITH REFLECTOR)	WW/NW/WH
100W	LHB102-100W (WITH REFLECTOR)	WW/NW/WH
150W	LHB102-150W (WITH REFLECTOR)	WW/NW/WH
200W	LHB102-200W (WITH REFLECTOR)	WW/NW/WH

INDUSTRIAL HIGHBAY

POWER

MODEL

COLOR

100W	LHB104-100W UFO	WW/NW/WH
150W	LHB104-150W UFO	WW/NW/WH
200W	LHB104-200W UFO	WW/NW/WH



LED ROPE LIGHT

Specs

- Voltage- 220v, 120L/m
- High power factor >0.9
- High Efficiency>88%
- Low THD
- CRI- 80
- Universal Supply: 90-265VAC
- Hi lumen Led
- Surge Protection
- Appropriate Thermal Dissipation

50 MTR ROLL
Rope width-9mm

100 MTR ROLL
Rope width-12mm

COLORS:



LED STRIP LIGHT



Input Watt	48	96
Product Code	220-9.6w	220-19.2w
Led/Chip	0.2	0.2
Led Rating Current	60	60
No.of Led Per mtr	120	240
View Angle	120*	120*
Color Temp	3k,4k,6k,B	3k,4k,6k
Lumens	>140	>140
Calculated Input current (@240v)	165mA	665mA
Output Current	200	800
Shape	Strip	Strip
Dimensions (Width mm)	8	8

System Lumens	>140	LED Life	>50000 Hrs
CRI	>80	Operating Temperature	-10* to +50*C
Input Voltage	12VDC	Rated Voltage (AC)	12VDC
Power Factor	>0.6	Frequency (Hz)	50Hz± 2
Surge Protection	Upto 3KV	Protection	Over Temperature, Short-Circuit Protection, OC Protection, Reverse Polarity Protection
Driver Efficiency (%)	>84%		
Driver (Type)	Isolate CC		
Driver Location	External		
IP (20/40/65)	IP20		

LED AC DC BULB



POWER	DRIVER TYPE	COLOR TEMP	STD PCKG
-------	-------------	------------	----------

10W	DRIVER	CW	100
-----	--------	----	-----

12W	DOB	CW	100
-----	-----	----	-----

CRI>80	SYSTEM LUMEN >110LM/W	INPUT 220V-240VAC 50/60HZ
--------	-----------------------	---------------------------

SURGE PROTECTION 4KV	PF >0.95	IP20 INGRESS PROTECTION
----------------------	----------	-------------------------

Recessed Mount - Low Height - High Quality - Backlit
 Brilliance Enhanced Illumination - Anti - Glare - Durable
 Housing


SMPS DRIVER



Power	Model	PARAMETER	CONVERSION EFFICIENCY	WEIGHT(GM)	SIZE(MM)
12V 60w	LSD-60w-12V	AC100-240V DC12V/5A	0.85	132	118X50X25
12v 120W	LSD-120W-12V	AC100-240V DC12V/10A	0.85	153	118X50X25
12v 200w	LSD-200w-12V	AC100-240V DC12V/16A	0.88	250	205X50X25
12v 300w	LSD-300w-12V	AC100-240V DC24V/25A	0.9	277	228X50X25
12v 400w	LSD-400w-12V	AC100-240V DC12V/33A	0.92	342	228X50X25

LED DRIVER

CONSTANT CURRENT

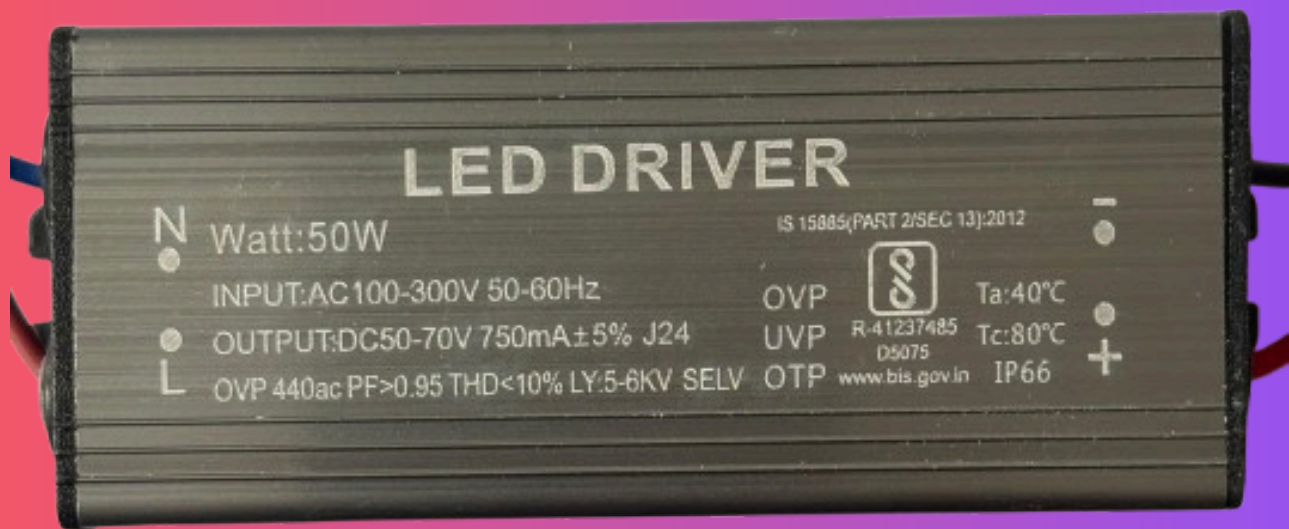

IP66, 240V, 50HZ

50-60W	750 MA/60V
50-60W	1500MA/36V
40-45W	1200MA/36V
30-36W	900MA/36V
20-24W	600MA/36V

QAMS
CERTIFICATION

Certificate of Registration

This is to certify that

LITOVAA LIGHTING
FIRST FLOOR, F-342, SECTOR 63, NOIDA, GAUTAM BUDDHA NAGAR-201301,
UTTAR PRADESH, INDIA

Has been assessed and certified by QAMS Certification
As meeting the requirements of:

ISO 9001:2015
(Quality Management System)

For the Following Scope of Activities:

DESIGN, MANUFACTURE, TRADING AND INSTALLATION OF ALL TYPES OF
LED LIGHTS, SOLAR LIGHTS, ITS SPARES AND CONTRACTOR OF
ELECTRICAL AND SOLAR OPERATED WORKS

Certificate Number :: 23UQAA2905

Date of issue :: 08 August 2023
First Surveillance Audit on or before :: 07 August 2024
Second Surveillance Audit on or before :: 07 August 2025
Re-certification due on :: 07 August 2026

To verify certificate visit at:
www.qamsglobal.com/search.php

REGD. NO. UKAF-CB-007

Signature

Authorised Signatory
QAMS Certification
D- 53, Sector 10, Noida-201301
Uttar Pradesh, India

Accreditation Board: UKA Forum Limited, 71-75, Shelton Street, Convent Garden, London, WC2H 9JQ
QAMS CERTIFICATION is a trademark of UKA Forum Limited, London, UK. This certification of remains the property of QAMS and must be returned to QAMS on cancellation or suspension of this certificate is subject to successful completion of surveillance audits. Further clarification regarding to QAMS and the membership in the QAMS Global Network may be obtained by consulting the organisation on certification@qamsglobal.com



"A JOURNEY OF LIGHT ACROSS THE HEART OF INDIA 🌍✨"
11 STATES ILLUMINATED. A VISION IGNITED. THIS IS JUST THE
BEGINNING.



LET'S ILLUMINATE THE FUTURE, TOGETHER.







THANK YOU FOR
CHOOSING LITOVAA

AT LITOVAA, WE DON'T JUST CREATE LIGHTS —
WE CRAFT EXPERIENCES, ILLUMINATE EMOTIONS,
AND SHAPE THE AMBIENCE OF TOMORROW.
WHETHER IT'S YOUR HOME, YOUR WORKSPACE, OR YOUR
DREAM PROJECT,
WE'RE HONORED TO BE A PART OF YOUR JOURNEY
TOWARD BRILLIANCE.
JOIN OUR VISION.
LIGHT UP YOUR WORLD.

 @litovaa.lighting

 litovaaled@gmail.com

 litovaa.in



A - 113, BLOCK A, SECTOR 80, NOIDA, DISST. G.B. NAGAR U.P.
201301