

Technical Data	
Total length	2000mm
Total width	550mm
Head Rest	350mm
Back Section	500mm
Kidney Bridge	100mm
Seat Section	450mm
Leg Section	600mm
Minimum height	700mm
Elevation up adjusts	2000mm
Trendelenburg in Zero Sliding Position	25°
Revers Trendelenburg in Zero Sliding Position	20°
Lateral Tilt (R & L)	15°
Head Rest-Raised from the horizontal	90°
Head Rest-Lowered from the horizontal	90°
Back Section-Raised from the horizontal	75°
Back Section-Lowered from the horizontal	28°
Leg Section-raised from the horizontal	10°
Leg Section-Lowered from the horizontal	90°
Leg Section Opened	90°
Sliding movement range	500mm
Kidney Bridge Elevation	110mm
Safe Working Load	2000mm



- Electric elevation up and down by remote control
- Hydraulic control for back and leg sets
- 6000N motor for Electric Elevation
- C-arm compatible (Radiolucent)
- Premium 316 stainless steel
- Memory foam mattress





## Accessories:



- Designed for procedures involving the head, neck, thorax, abdomen, perineum, extremities, gynecological, obstetrical, urological, orthopedic, laryngological, and cranial operations.
- Features adjustable settings: elevation, lowering, Reversed Trendelenburg, Trendelenburg, and Lateral Tilt.
- Leg section is rotatable, openable, disassemblable, and adjustable.
- Particularly suited for urological procedures.

**Safe working load: 200kg**




**Heavy duty gas spring (500)N for each leg**

**Heavy duty gas spring (1000)N x2 for Backward sector**



**Foot pedal to control the new manual brake system**

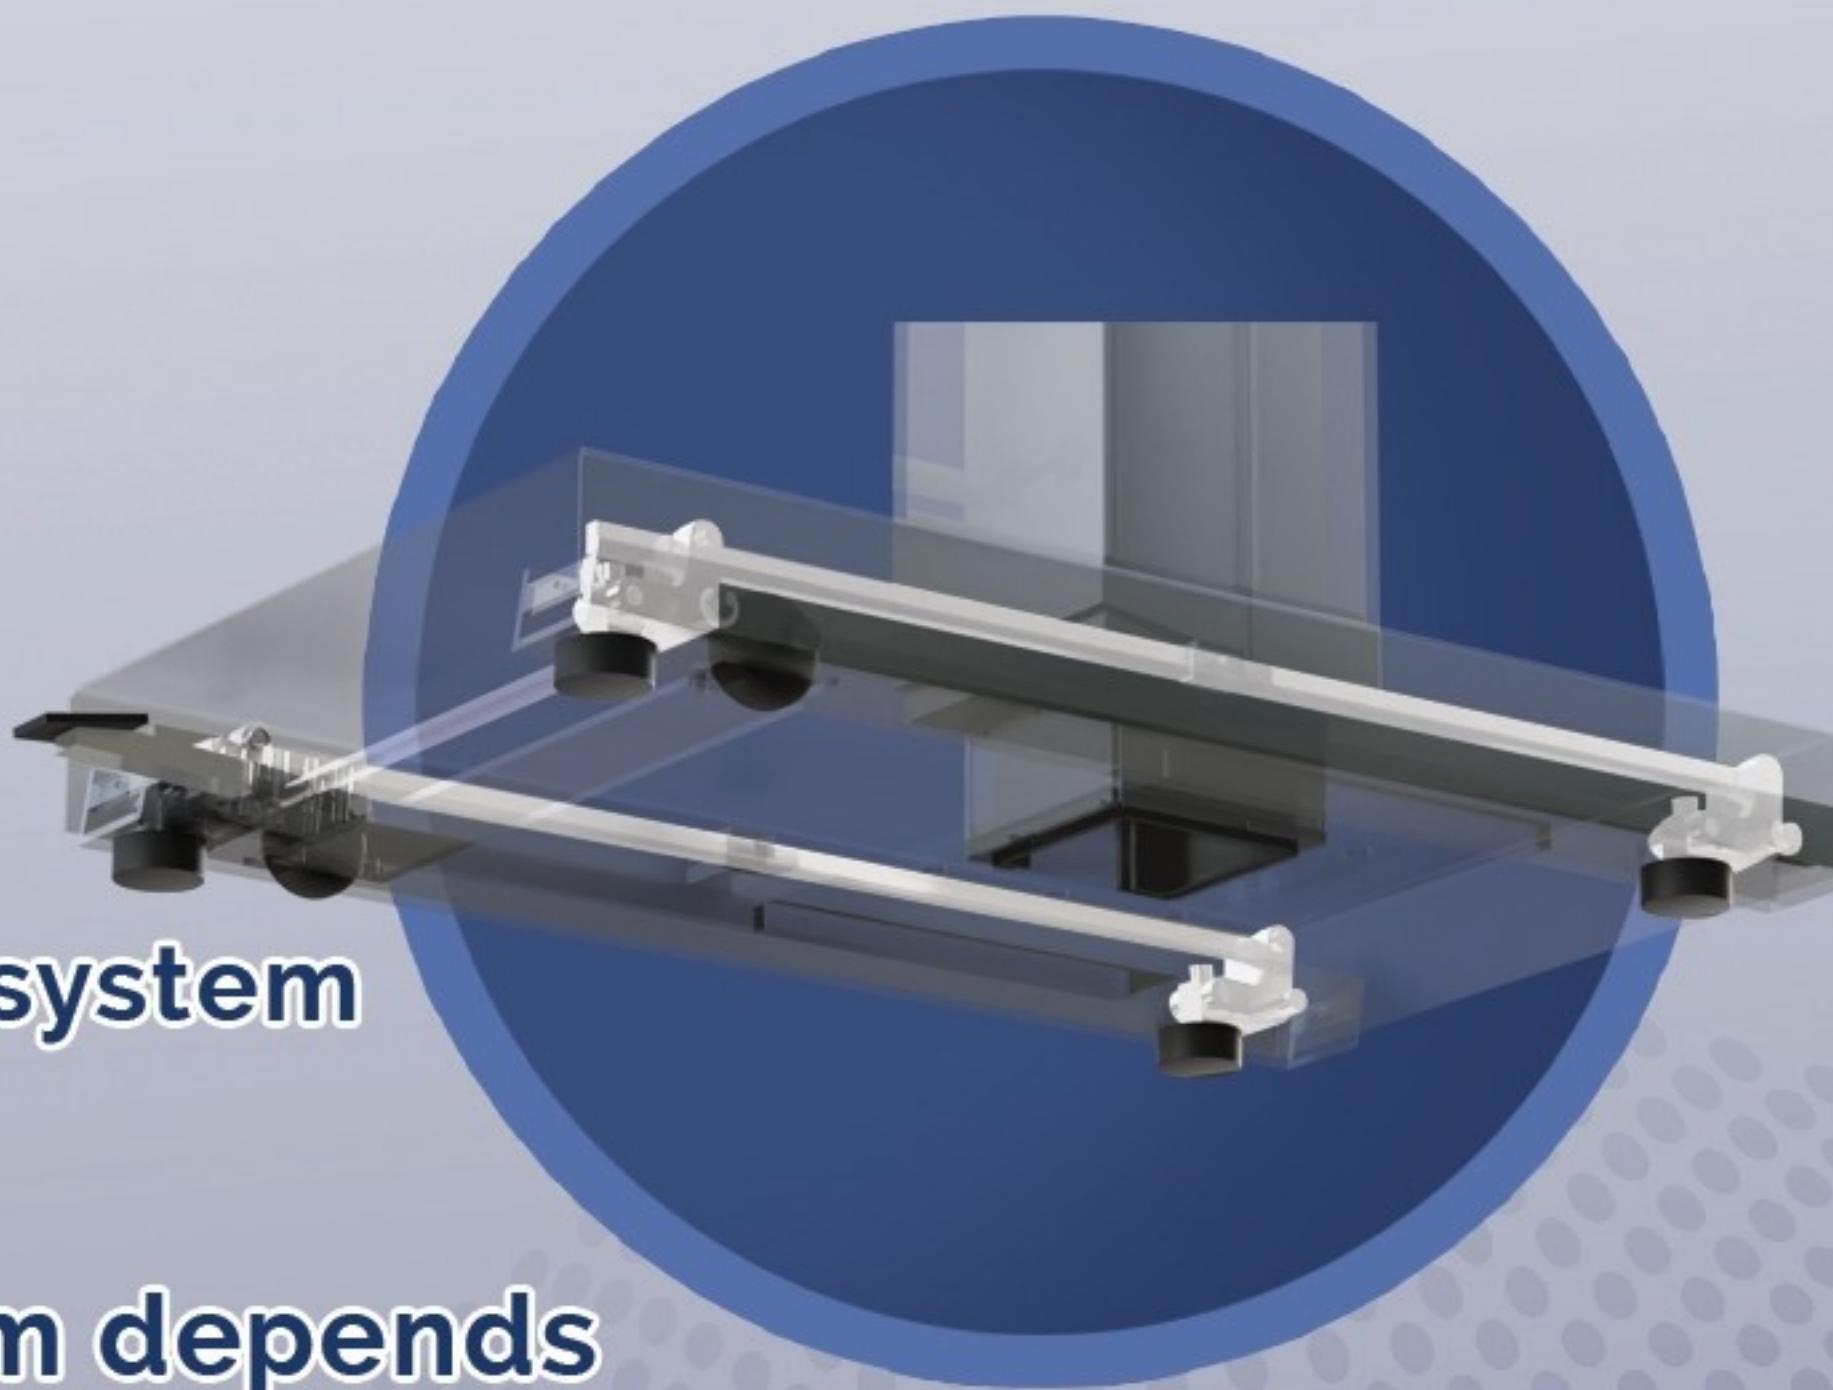

**Unique braking system depends on four lifting rubber supports simultaneously**