



SERIE KF 700H Medidor Electromagnético de inserción


Ficha Técnica



Performance Feature

Diameter:	DN50mm-DN2000mm
Electrode:	316L, Hc, Hc,Ti
Liner:	PTFE
Medium:	Conductivity liquids
Medium conductivity:	$\geq 20\mu\text{S/cm}$
Accuracy:	$\pm 2.0\% \text{RS}$
Velocity of flow:	0.3m/s – 10m/s
Working temperature:	-25°C-80°C
Working pressure:	0.6Mpa-1.6Mpa
Protection class:	IP65, IP68
Converter options:	MF710/720/730(remote)/MF740/750
Output:	4-20mA/ frequency/pulse output signal
Power supply:	85~ 265 VAC (50HZ or 60 HZ), 24VDC
Installation type:	Compact, remote

KF700-H How to order

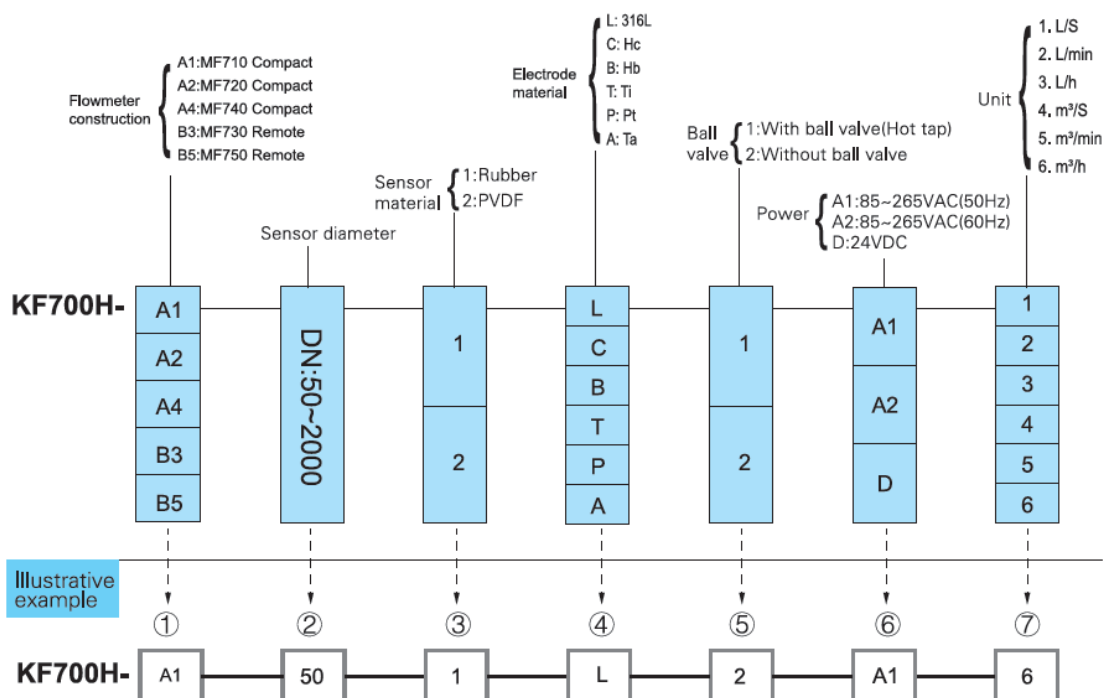

* Remark: For remote type, please specify the cable length(Standard is 8M).

External dimensions

Unit (mm)

DN mm	L	A	C	H	Normal Flow (m ³ /h)
50	100	48	6.25	45.75-S	35
80	100	48	10	42-S	90
100	100	48	12.5	39.5-S	140
125	100	48	15.625	36.375-S	200
150	120	48	18.75	53.25-S	300
200	120	48	25	47-S	600
250	120	48	31.25	40.75-S	900
300	140	48	37.5	54.5-S	1200
350	140	48	43.75	54.5-S	1800
400	140	48	50	48.25-S	2000
500	160	48	62.5	42-S	3500
600	160	48	75	49.5-S	5000
700	180	48	87.5	37-S	7000
800	180	48	100	44.5-S	9000
900	200	48	112.5	32-S	11000
1000	213	48	125	39.5-S	15000
1200	238	48	150	40-S	20000
1400	263	48	175	40-S	30000
1600	288	48	200	40-S	35000
1800	313	48	225	40-S	45000
2000	338	48	250	40-S	60000

