



BenefitAll Supply Chain
(Shandong) Co.,Ltd.



CONTENTS

目录

1

叉车系列 Forklift Series

- 10 站驾式大前移电动叉车 Standing electric reach forklift
- 11 小前移电动叉车 Small electric reach forklift
- 12 平衡重式电动叉车 Counterbalanced electric forklift
- 13 平衡重式电动叉车 Counterbalanced electric forklift
- 14 迷你型三支点电动叉车 Mini three fulcrum electric forklift
- 15 高空拣选电动叉车 High altitude picking electric forklift
- 16 平衡重蓄电池电动叉车 Balance battery electric forklift
- 17 电动叉车夹包车 Bale clamp forklift
- 18 纸卷夹电动叉车 Paper roll clamp forklift
- 20 柴油叉车 Diesel forklift
- 21 汽油内燃平衡重叉车 Petrol Internal combustion counterbalanced forklift
- 22 液化汽平衡重叉车 Liquefied gas counterbalanced forklift
- 23 托盘翻转机 Pallet inverter

2

堆高车系列 Pallet Stacker

- 24 全电动堆高车 (单门架) Electric pallet stacker (single mast)
- 25 全电动堆高车 (双门架) Electric pallet stacker (dual masts)
- 27 全电动堆高车 (三门架) Electric pallet stacker (triple masts)
- 29 宽腿型全电动堆高车 Wide straddle electric pallet stacker
- 30 带护顶架全电动堆高车 Overhead-guard electric pallet stacker
- 31 平台式全电动堆高车 Electric platform stacker
- 32 冶炼行业专用滚筒式全电动堆高车 Smelting industry use electric roller stacker
- 33 石膏板楼板专用全电动堆高车 (夹抱翻转 90 度式)
Plasterboard & floor slab handling electric stacker (90° rotation)
- 34 地面不平专用全电动堆高车 Electric stacker use for application on sunken floor
- 35 碳化钨炉内取料全电动堆高车 Wolfram carbide furnace collecting electric stacker
- 36 多晶硅炉内取料全电动堆高车
Polycrystalline silicon furnace collecting electric stacker
- 37 铁路专用火车头全电动加沙车
Railway use locomotive sand-feeding electric truc
- 38 全电动高空取料机 Full battery electric redaimer stacker

CONTENTS

目录

3

半电动堆高车

Semi-electric Stacker

- 39 半电动堆高车 (单门架) Semi-electric stacker (single mast)
- 40 半电动堆高车 (双门架) Semi-electric stacker (dual masts)
- 41 半电动堆高车 (三门架) Semi-electric stacker (triple masts)
- 42 半电动堆高车 (配重式) Semi-electric counterbalanced stacker
- 43 半电动堆高车 (宽腿式) Straddle leg Semi-electric stacker
- 44 半电动堆高车 (单柱式) Single-column Semi-electric stacker
- 45 半电动铝合金加沙车 Semi-electric aluminum stacker
- 46 半电动高空取料机 Semi-electric stacker-reclaimer
- 47 电动汽车升降机 Electric car lifter
- 48 半电动堆高车 (称重式) Semi-electric weighing stacker
- 49 半电动堆高车 (货叉侧移式) Semi-electric side-shift stacker
- 50 半电动堆高车 (可倾斜倒料) Semi-electric turning stacker
- 51 半电动堆高车 (不锈钢 304 材质) Stainless steel Semi-electric stacker
- 52 半电动堆高车 (不锈钢宽腿) Stainless steel Semi-electric stacker
- 53 半电动楼板夹抱翻转车 Semi-electric floor clamp turning stacker

4

手动堆高车

Hand Hydraulic Stacker Lifter

- 54 手动堆高车 Hand hydraulic stacker lifter
- 55 手动堆高车 (宽腿) Straddle leg manual stacker
- 56 手动堆高车 (炉内取料专用) Manual stacker(special furnace reclaiming)
- 57 手动堆高车 (货叉加长型) Manual stacker(long fork type)
- 58 手动堆高车 (配重式) Manual counterbalanced stacker
- 58 手动液压堆高车 (双门架) Hand hydraulic stacker
- 59 手动堆高车 (单柱式) Manual stacker(single-column type)
- 59 轻型手动堆高车 (不锈钢 304) Stainless steel light duty stacker

5

纸筒车系列

Paper Roll Lifter Series

- 60 全自动纸筒夹抱翻转车 (适合夹起竖立的纸筒) Full automatic paper roll lifter and rotator (suitable for clamping erect rolls)
- 61 半动纸筒夹抱翻转车 (适合竖立夹起) Semi-automatic paper roll lifter and rotator (suitable for clamping erect rolls)
- 62 半动纸卷夹抱翻转车 (适合夹起横向的纸卷) Semi-automatic paper roll lifter and rotator (suitable for clamping tranverse rolls)
- 63 手动夹纸车 (适合竖立夹起) Manual paper roll stacker truck (suitable for clamping erect rolls)
- 64 手动夹纸车 (适合横向夹起) New manual paper roll stacker lifter (suitable for clamping the horizontal rolls)
- 65 平衡重全电动纸筒夹抱翻转车 (适合横向和竖向夹起纸卷) Full electric counter balance paper roll stacker (suitable for clamping the horizontal rolls and vertical rolls)
- 66 全电动纸卷搬运车 (适合平地搬运纸卷) Electric paper roll pallet truck(suitable for handling paper roll in ground)
- 67 半电动纱辊车 (有连杆) Semi-electric yarn roller pallet truck/trolley (have connecting link)
- 68 半电动纱辊车 Electric roll lifter stacker
- 69 手动称重纱辊车 Manual yarn roll trolley with weighing scale
- 70 手动纱辊车 Manual yarn roller trolley
- 71 手动纱辊车 (加长型) Manual yarn roller trolley (elongated)
- 72 全自动纸包夹抱车 (适合正方形或长方形) Electric Bale Lifter (Suitable for square or rectangular)
- 73 半电动纸筒升高车 (轻型—圆棒款) Electric Roll Stacker (Light-duty with round pole)
- 74 半电动称重叉车 Semi-electric weighing roll stacker
- 75 手动纸筒升高车 (轻型—圆棒款) Manual paper roll stacker (light-duty with round pole)

6

搬运车

Pallet Truck

- 76 全电动搬运车 (带侧扶手) Electric pallet truck(with side arm-rests)
- 77 全电动搬运车 (货叉加长型) Long fork type electric pallet truck
- 78 全电动搬运车 (平板型) Electric pallet truck with plate table
- 79 全电动搬运车 (升降平台式) Lifting platform type electric pallet ruck
- 80 全电动搬运车 (超短) Short fork type electric pallet truck
- 81 全电动搬运车 (轻型) Electric walkie pallet jack
- 82 汽车转移器 Car mover
- 83 8T 重型电动搬运车 8Ton heavy duty electric pallet truck
- 84 火车轮专用全电动搬运车 Electric pallet truck for handling train wheels
- 85 半电动搬运车 Semi-electric pallet jack
- 86 半电动搬运车带踏板 Semi-electric pallet truck with pedal
- 87 半电动称重搬运车 electric weighing pallet truck
- 88 防爆电动搬运车 (不锈钢) Electric explosion-proof stainless steel pallet truck
- 89 手动液压搬运车 Hand manual pallet truck
- 90 手动液压搬运车 (不锈钢) Stainless steel hand pallet truck
- 91 手动称重搬运车 (不锈钢) Hand pallet truck with scale SS304
- 92 手动带电子秤搬运车 Hand pallet truck with scale
- 93 手动搬运车 (镀锌) Galvanized hand pallet truck

CONTENTS

目录

7

Tow Tractor

牵引车

- 94 电瓶牵引车 Battery towing tractor
- 95 站驾式电动牵引车 Stand-on electric towing tractor
- 96 座驾式电瓶牵引车 Seated battery towing tractor
- 97 站驾式电动牵引车 Stand-on electric towing tractor
- 98 5T 重型电动牵引车 5Ton heavy duty electric towing tractor
- 99 10T 重型大吨位电动牵引车 10Ton heavy duty electric towing tractor

8

Floor Crane Series

吊车系列

- 100 电动搬运车式吊车 (电动旋转 , 步行式)
Battery trolley crane (electric rotating, pedestrian)
- 101 电动搬运车式吊车 (手动旋转 , 站驾式)
Battery trolley crane (manual rotating, standing)
- 102 电动搬运车式吊车带钢丝绳 Battery trolley crane with wire rope
- 103 电动吊车 (吊臂不旋转)Battery trolley crane (arm with no rotation)
- 104 电动液压吊车 Hydraulic electric crane
- 105 自行走吊车 Self-propelled crane
- 106 防爆电动行走吊车 Ex-proof electric crane
- 107 重型 3T 自行走吊车 Heavy duty 3t self-propelled crane
- 108 自行走吊车 (一汽大众款)
Self-propelled crane (volkswagen factory used)
- 109 电动液压小吊车 Electric hydraulic crane
- 110 全自动旋转吊车 Automatic rotating crane
- 111 配重式液压吊车 Counter-balanced hydraulic crane
- 112 半电动吊车 Semi-electric crane
- 113 搬运车式液压吊车 Hydraulic small crane
- 114 不锈钢配重堆高车 Stainless steel counter-balanced stacker crane
- 114 手动液压小吊车 Manual hydraulic crane

9

Electric oil drum lifter

电动油桶车

- 115 全电动油桶车 (自夹紧 , 适合铁桶) Electric oil drum lifter
- 116 全电动称重油桶车 (适合铁桶)Electric oil drum lifter with scale(Special for steel drum)
- 117 全电动油桶车 (手夹紧 , 适合铁桶) Electric drum lifter stacker
- 118 全电动油桶车 (适合塑 \ 铁桶)Full Electric drum handling equipment
- 119 全电动油桶车 (只堆高 , 不翻转)Full electric drum stacker (hzyl600b)
- 120 半电动可倾式油桶车 (手夹紧电翻转) Semi-electric lifter stacker
- 121 电动单臂投料机 (HZYL300) Electric one-armed single batch charger(HZYL300)
- 122 电动油桶堆放车 Power-propelled drum racker HZYL350
- 123 半电动多功能油桶车 (单门架 , 夹塑桶) Electric Drum Lifter (HZYL500A)
- 124 半电动配重油桶车 (无底腿 , 只堆垛 , 不翻转) Semi-electric truck stacker
- 125 半电动油桶车 (直角支腿 , 只堆高不旋转)V-shaped base electric drum stacker (HZDT300)
- 126 半电动称重油桶堆高车 (只堆高 , 不翻转 , 塑桶)Semi-electric drum stacker with scale
- 127 电动称重油桶车 (多功能) Multi-function weighing electric drum dumper (HZYL520-1)
- 128 半电动称重油桶车 (夹铁桶 , 手摇翻转倒料) Electric weighing drum dumper
- 129 半电动称重油桶车 (夹塑桶) Semi-electric drum rotator
- 130 半电动油桶车 (直角腿 , 夹铁桶翻转)
Drum palletizer with battery power drum lift

9

Hand oil drum lifter and clamp

手动油桶车和夹具

- 131 手动可倾式油桶车 (夹铁桶)Hydraulic tilting drum lifter (steel drum)
- 132 手动重型油桶倒料车 Hydraulic heavy duty tilting drum lifter (steel drum)
- 133 手动称重油桶卸料机 (夹铁桶)Hydraulic tilting drum lifter with scale (steel drum)
- 134 手动油桶倾倒车 (夹塑桶 , 多功能)
Hydraulic drum rotators (plastic drum, multifunction)
- 135 手动称重油桶车 (夹塑桶)Hydraulic tilting drum lifter with scale (plastic drum)
- 136 手动液压油桶堆高车 (只堆高 , 不翻转)Manual non-tilting drum stacker
- 137 三角腿油桶堆高车 Hydraulic drum stacker with triangle leg
- 138 三角腿油桶堆高车 Hydraulic drum stacker with triangle leg
- 139 油桶搬运车 Drum trolley
- 140 不锈钢三脚腿油桶搬运车 Stainless steel drum trolley with triangle leg
- 141 称重油桶搬运车 Drum trolley with scale
- 142 称重油桶搬运车 Drum trolley with scale
- 143 称重油桶搬运车 Drum trolley with scale
- 144 咬嘴油桶搬运车 Eagle-grip type drum hand carts
- 145 咬嘴式油桶车 Eagle-grip type drum hand carts
- 146 咬嘴油桶车 Eagle-grip type drum hand carts
- 147 DC500 低位油桶搬运车 Low profile drum truck
- 147 平移油桶搬运车 Round drum dollies

CONTENTS

目录

9

手动油桶车和夹具

Hand oil drum
lifter and clamp

- 148 机械式油桶搬运车 Mechanical drum carriers
- 149 机械式油桶车 Mechanical drum carriers
- 150 单桶夹具 (一次夹 1 只桶, 单夹爪, 夹塑铁桶) Forklift drum grab
- 151 单桶夹具 (一次夹 1 只桶, 单夹爪, 夹塑铁桶) Forklift drum grab
- 152 HZDG40 叉车专用油桶搬运夹 (单桶, 铁桶) Forklift mounted drum grab
- 153 抱箍式油桶搬运夹 (一次夹 1 个桶, 只适合大肚塑桶) Forklift drum grab DG400
- 抱箍式油桶搬运夹 (一次夹 2 个桶, 只适合大肚塑桶) Forklift drum grab DG800
- 154 叉车专用吊夹具 (一次吊 4 个桶) Forklift drum lifters
- 155 叉车 \ 吊车专用吊夹具 Forklift drum lifters
- 156 重型不锈钢油桶夹爪双鹰嘴 Forklift mounted rubber-belt drum grabbers
- 157 油桶吊具 Forklift mounted and crane mounted drum lifters
- 158 油桶吊具夹具 Drum lifters/drum tongs dl500abc
- 159 油桶翻转器 (翻转 1 只铁桶) Drum rollers
- 160 HZTY400A 油桶搅拌器 (不移动, 适合塑、铁桶) Tilt-to-load drum tumblers
- 161 叉车专用倒桶机具 (塑铁桶, 手翻转) Drum tilters HZHK285

10

升降机系列

Lift Series

- 162 剪叉式升降机 (手推行走) Scissor lift(Push by hand)
- 163 剪叉式升降机 (蓄电池行走) Scissor lift(battery-powered driving)
- 164 自行走升降机 (液压轮驱动) Self-propelled scissor lift(hydraulic driving wheel)
- 165 自行走升降机 (电动轮驱动) Self-propelled scissor lift(electric driving wheel)
- 166 曲臂升降机 (电动) Boom lifts (electric)
- 167 折臂升降机 (柴油) Folding boom lifts (diesel)
- 168 铝合金升降机 (单桅柱) Aluminum lift (single mast)
- 169 铝合金升降机 (双桅柱) Aluminum lift (double masts)
- 170 铝合金升降机 (三桅柱) Aluminum lift (three masts)
- 171 铝合金升降机 (四桅柱) Aluminum lift (four-mast)
- 172 铝合金升降机 (六桅柱) Aluminum lift (six-mast)
- 173 残疾人升降机 Disabled lifts
- 174 导轨式固定升降机 Rail-type fixed lift
- 175 固定式升降平台 (无舌板, 无护栏, 挖地坑) Fixed lifting platform (no tongue, no fence, digging pits)
- 176 固定式升降平台 (有舌板, 有护栏, 挖地坑)
- Fixed lifting platform (the tongue plate, with fence, digging pits)
- 177 固定式升降平台 (螺丝拧固定在地面上) Fixed lifting platform (screw fixed to the ground)
- 178 移动式登车桥 Mobile ramps
- 179 固定式登车桥 Fixed ramps
- 180 移动式工具车 (电动) Mobile tool cart (electric)
- 181 移动式工具车 (手动) Mobile tool cart (manual)
- 182 移动式工具车 (电动) Mobile tool cart (electric)

11

千斤顶系列

Jack

- 183 超薄型千斤顶 (单独顶是不好动作上升的, 要配手动泵或电动泵才可上升下降)
- Super thin jack(powerd by hand pump or electric pump)
- 184 薄型千斤顶 (单独顶是不好动作上升的, 要配手动泵或电动泵才可上升下降)
- Hydraulic thin jack(powerd by hand pump or electric pump)
- 185 超高压电动千斤顶 (双作用, 要配电动泵才可上升, 有油管, 压力表)
- Electric super high pressure jack. (double hydraulic pressure, working with electric pump, tubing and pressure gauge
- 188 超高压电动同步千斤顶 Super high pressure synchronous jack
- 188 单作用千斤顶 Single hydraulic pressure jack
- 190 双作用千斤顶 Double hydraulic pressure jack
- 191 空心千斤顶 (单作用) Hollow jack (single hydraulic pressure)
- 192 空心千斤顶 (双作用) Hydraulic tension jack
- 193 轴承加热器 HA 型 Micro-control bearing heater
- 193 轴承加热器 ZRQ 型 Micro-control bearing heater


12

扫地机

Sweeper

- 194 工业用室内扫地机 PD-S353 Indoor push sweeper
- 195 室内半自动扫地机 PD-S343 Indoor push sweeper
- 196 手推扫地机 PD-S326 Hand push broom
- 197 全自动带洒水扫地机 PD-S373 Electric battery outdoor push sweeper

站驾式大前移电动叉车
Standing electric reach forklift

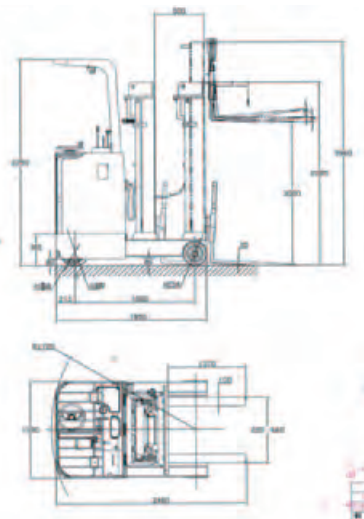


- 站驾式前移电动叉车采用配置成熟可靠的美国科蒂斯电控系统，安装采用全封闭式结构，保证电控免受污染和水溅
- 重要零部件都经过了严格的试验，保证了整机的性能。整机电路具有过热保护、反接保护、防短路等功能
- 整车设有开关及紧急断电开关
- 当货叉起升到最高点时，本车使用了机械限位和电器限位的双重安全保护
- 当电气系统有任何故障发生时，车辆自动停止运行
- 广泛应用于电力、石油、化工、制药、纺织、军工、油漆、颜料、煤炭、及港口、铁路、货场的仓库车间等场所，大大提高了工作效率，降低了工人劳动强度，是必不可少的装卸设备

- Adopts American Curtis electric control system with reliable configuration; installs in a fully enclosed structure, to ensure that the electronic control against contamination and water splash
- Important accessories were through the strict test, to ensure the performance of the machine
- The whole circuit has over-heat protection, reverse polarity protection, short circuit proof and other functions
- The forklift has a switch and an emergency-off switch
- When fork rising at the highest point, there are double safety protections as electrical and mechanical limit stop
- Widely used in electricity, petroleum, chemical, pharmaceutical, textile, military, paints, pigments, coal industries, and used on ports, railways, freight yard warehouse workshops and other places, greatly improving the work efficiency, reduce labor intensity, and this is essential handling equipment

品 牌 Brand	Huizelift			
站驾式大前移电动叉车 Reach stacker	CQD1030A	CQD1030B	CQD1530A	CQD1530B
订货号 Item Number	1.00001	1.00002	1.00003	1.00004
额定载重 Capacity (kg)	1000	1000	1500	1500
起升高度 Lift height (mm)	3000	3000	3000	3000
门架最低 Mast height after mast fall	2050	2050	2050	2050
蓄电池 Battery (V/Ah)	24/280	48/280	24/330	48/330
充电器 Charger (V/A)	24/40	48/40	24/45	48/45
起升电机 Lifting motor (Kw)	4	4	4	4
驱动电机 Driving motor (Kw)	2.5	2.5	2.5	2.5
货叉外宽 Fork width (mm)	200-650	200-650	200-650	200-650
护顶架高 Overhead guard height	2190	2190	2190	2190
前移距离 Reach distance (mm)	500	500	500	500
货叉尺寸 Fork size (mm) L*W*H	1070*100*35	1070*100*35	1070*100*35	1070*100*35
不含货叉车长 Overall length(mm)	1800	1800	1950	2353
车身总宽 Overall width (mm)	1000	1000	1000	1000
车身总高 Overall height (mm)	2190	2190	2200	2200
通道要求 Channel width 1200*1000	3000	3000	3300	3300
回转半径 Turning radius (mm)	2200	2200	2200	2200
充电器重量 Charger weight(Kg)	33	45	37	45
车身重量 Weight (Kg)	1840	2060	1870	2130
驱动轮 Driving wheel (mm)	230*90			
平衡轮 Training wheels (mm)	178*80			
前 轮 Front wheel (mm)	210*80			

小前移电动叉车
Small electric reach forklift

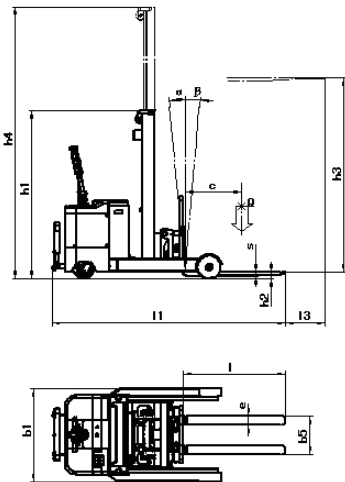


- 小前移电动叉车适用于单面和双面托盘
- 门架可以前移 500mm
- 强劲有力的驱动系统，性能稳定
- 智能型充电器无需人看护，自动断电
- 超静音耐磨 PU 轮，对地面有保护作用
- 铅酸牵引型蓄电池耐久性好，适合长时间工作
- 提升泵站体积小，可靠性高，工作平稳，节能，降噪，环保
- 美国科蒂斯电控总成，带电量显示表，随时可查看电量情况

- Suitable for single-sided and double-sided tray
- Mast can move forward 500mm
- Powerful drive system, stable performance
- Intelligent battery charger automatically cut off power when charging is completed
- Ultra-silence Abrasion resistant PU Wheels could prevent working floor from scratch
- Durable lead-acid battery lasts for long time continuously work
- Small volume Lifting pump ,with reliable and stable performance, noiseless and environment protecting
- Adopts America Curtis electronic control assembly, with power display table, and power conditions are visible at any time

品 牌 Brand	Huizelift				
小前移电动叉车 small reach forklift	CQD1030	CQD1530	CQD1045	CQD0752	CQD0560
订货号 Item Number	1.01001	1.01002	1.01003	1.01004	1.01005
额定载重 Capacity (kg)	1000	1500	1000	700	500
起升高度 Lift height (mm)	3000	3000	4500	5200	6000
蓄电池 Battery (V/Ah)	24/210	24/210	24/240	24/280	24/280
充电器 Charger (V/A)	24/30	24/30	24/30	24/40	24/40
起升电机 Lifting motor (Kw)	2.5	2.5	2.5	2.5	2.5
驱动电机 Driving motor (Kw)	1.5	1.5	1.5	1.5	1.5
货叉外宽 Fork width (mm)	550	550	550	550	550
前移距离 Reach distance (mm)	500	500	500	500	500
货叉尺寸 Fork size (mm) L*W*H	1070*100*35	1070*100*35	1070*100*35	900*100*35	900*100*35
车身总长 Overall length (mm)	3300	3300	3300	3200	3200
车身总宽 Overall width (mm)	1050	1050	1100	1100	1100
车身总高 Overall height (mm)	2130	2130	2190	2200	2200
通道要求 Channel width 1200*1000	3400	3400	3400	3300	3300
车身重量 Weight (Kg)	906	948	979	1099	1265
货叉离地 Min. Height (mm)	85				
驱动轮 Driving wheel (mm)	1*φ 250*80				
辅助轮 Training wheels (mm)	2*φ 150*50				
前轮 Front wheels (mm)	2*φ 178*80				
爬 坡 度 Climbing slope (%)	1/2				
行驶速度 (满载 / 空载) Travel speed Km/h	4/6				
提升速度 (满载 / 空载) Lifting speed mm/s	45/50				
下降速度 (满载 / 空载) Falling speed mm/s	50/45				
制动方式 Braking type	电磁制动 Electromagenetic braking				

平衡重式电动叉车
Counterbalanced electric forklift

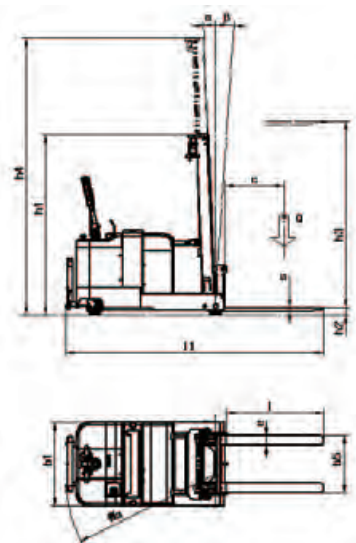


- 平衡重式电动叉车采用电脑程序控制，无级变速
- 优质 12C 型钢精制宽视野门架；精制锻打货叉
- 配重无底腿式，适用于单、双面托盘
- 整车结构简单，操纵灵活，微动性好
- 应用于机械、电子、化工、制药、轻纺等仓库车间

- Adopts computer program control, continuously variable transmission
- The wide-view mast was made of high-quality refined 12Ctype steel with refined forged forks
- bottomless legged type, suitable for single, double-sided tray
- Simple body structure, flexible operation, good performance on micro-movement
- Used in warehouse or workshop in machinery, electronics, chemical, pharmaceutical, textile e industries , cooperated with palletizing operations

品 牌 Brand	Huizelift			
平衡重叉车 Counterbalanced electric forklift	CPD-II-1030	CPD-II-1045	CPD-II-1530	CPD-II-1545
订货号 Item Number	1.02001	1.02002	1.02003	1.02004
额定载重 Capacity (kg)	1000	1000	1500	1500
起升高度 Lift height (mm)	3000	4500	3000	4500
门架最低 Mast height after mast fall	2250	2390	2450	2600
蓄 电 池 Battery (V/Ah)	24/210	24/210	24/240	24/240
充电器 Charger (V/A)	24/30	24/30	24/35	24/35
起升电机 Lifting motor (Kw)	2.5	2.5	2.5	2.5
驱动电机 Driving motor (Kw)	1.5	1.5	1.5	1.5
货叉外宽 Fork width (mm)	600	600	600	600
货叉尺寸 Fork size (mm) L*W*H	1070*100*35	1070*100*35	1070*100*35	1070*100*35
车身总长 Overall length (mm)	1682+1070	1782+1070	1882+1070	1882+1070
车身总宽 Overall width (mm)	850	950	850	950
车身总高 Overall height (mm)	2130	2190	2200	2200
通道要求 Channel width 1200*1000	3000	3000	3300	3300
车身重量 Weight (Kg)	1157	1256	1240	1296
货叉离地 Min. Height (mm)	85			
驱动轮 Driving wheel (mm)	1*φ 250*80			
辅助轮 Training wheels (mm)	2*φ 150*50			
前轮 Front wheels (mm)	2*φ 178*80			
爬 坡 度 Climbing slope (%)	1/2			
行驶速度 (满载 / 空载) Travel speed Km/h	4/6			
提升速度 (满载 / 空载) Lifting speed mm/s	45/50			
下降速度 (满载 / 空载) Falling speed mm/s	50/45			
制动方式 Braking type	电磁制动 Electromagenetic braking			

平衡重式电动叉车
Counterbalanced electric forklift

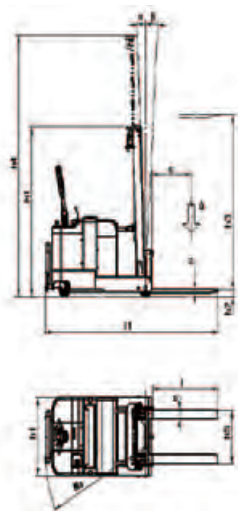


- 平衡重式电动叉车符合欧洲 EN1757-1:2001,EN1727 标准
- 高强度 C 型钢门架，坚固安全
- 大容量的牵引电池，充电方便快捷，电量持久
- 可选配折叠式踏板，开闭操作方便
- 台湾极智泵站，体积小，可靠性高，工作平稳，节能，降噪，环保
- 美国进口的科蒂斯 (Curtis) 交流电控系统反应灵敏，操控自如，可靠性高
- 加装安全防爆阀，液压软管一旦失效情况下货物不会快速下落，确保操作人员人身安全

- In compliance with European standards: EN1757-1:2001, EN1727
- Mast is made from C channel steel, stronger and safer
- High capacity durable lead-acid battery lasts for long time continuously work
- Ergonomic design standing pedal as optional device, easy to release and collect
- Taiwan KS lift pump, with small volume, reliable and stable performance, noiseless and environment friendly
- America Curtis electric control system, with rapid-response, easy operation and high reliability
- With anti-explosion valve, material won’ t fall down directly if hydraulic hose failed, guarantee the safety to operation staff

品 牌 Brand	Huizelift	
型 号 Model	CPD0530	CPD0830
订货号 Item Number	1.03001	1.03002
额定载重 Capacity (kg)	500	800
起升高度 Lift height (mm)	3000	3000
门架最低 Mast height after mast fall	2250	2250
蓄 电 池 Battery (V/Ah)	24/210	24/210
充电器 Charger (V/A)	24/30	24/30
起升电机 Lifting motor (Kw)	2.5	2.5
驱动电机 Driving motor (Kw)	1.5	1.5
货叉外宽 Fork width (mm)	550	550
货叉尺寸 Fork size (mm) L*W*H	1070*100*35	1070*100*35
车身总长 Overall length (mm)	1880+1070	1880+1070
车身总宽 Overall width (mm)	850	850
通道要求 Channel width 1200*1000	3000	3000
车身重量 Weight (Kg)	940	980
货叉离地 Min. Height (mm)	85	
驱动轮 Driving wheel (mm)	1*φ 250*80	
辅助轮 Training wheels (mm)	2*φ 150*50	
前轮 Front wheels (mm)	2*φ 178*80	
爬 坡 度 Climbing slope (%)	1/2	
行驶速度 (满载 / 空载) Travel speed Km/h	4/6	
提升速度 (满载 / 空载) Lifting speed mm/s	45/50	
下降速度 (满载 / 空载) Falling speed mm/s	50/45	
制动方式 Braking type	电磁制动 Electromagenetic braking	

平衡重蓄电池电动叉车
Balance battery electric forklift


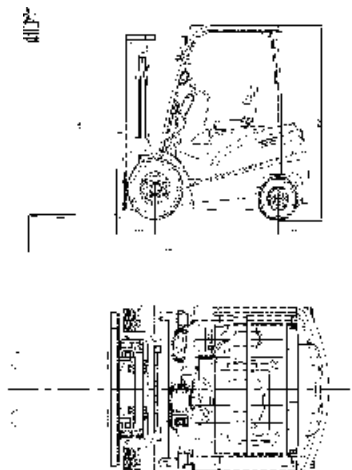


- 平衡重蓄电池电动叉车采用交流 AC 驱动电机，提供更强劲动力，使整车反应更迅速，控制更精确
- 强有力的提升泵站，使货物起升平稳有力
- 控制器自我诊断系统，通过手持单元显示故障代码，解决故障更方便
- 车架结构坚固耐用，确保货叉轻松处理重型货物
- 高强度的车身设计，使叉车性能更加稳定，使用寿命更长
- 大容量铅酸牵引型蓄电池，可以满足较长和较为频繁的工作要求
- 电动叉车货叉采用锻打结构，确保使用寿命
- 计时器和电量表随时显示电量使用情况，方便通知操作者及时充电
- 高强度四轮充气胎，承重能力强，更平稳且抗磨损
- 车体后盖的拆装快捷方便，便于检修和维护
- 无碳刷，基本无需维修，大大减少维护成本
- 一体式急停开关设计，更换非常容易
- 电池箱盖易开启，电瓶取出较方便，使得维护和更换电池更加轻松
- 提升高度有 2000mm/2500/3000/3300/3500/3700/4000/4250/4500/5000/5500/6000mm

- Balance weight four-wheel electric forklift adopts AC drive motor, which provides more power, making the forklift more responsive, more precise control
- Powerful pump stations to ensure lifting smooth and powerful
- The controller has a self-diagnosis system, fault code will be displayed by the handheld unit, easier to solve troubleshooting
- Rugged frame structure to ensure that the fork is easy to handle heavy cargo
- High-strength body design, making the forklift more stable performance and longer service life
- Large-capacity lead-acid traction batteries, longer and more frequent to meet work requirements
- The fork using forged structure, to ensure service life
- Timers and power table shows the power usage all the time, the operator is notified in a timely manner to facilitate charging
- High-strength four pneumatic tires, load-bearing ability, more stable and resistant to wear
- The vehicle body's cover is fast and convenient to disassemble, easy to repair and maintenance
- No carbon brush, basically no maintenance, greatly reducing maintenance costs
- The integrated emergency stop switch design, easy to replace
- The battery cover is easy to open, more convenient to remove the batteries, making it easier to maintain and replace the battery
- lifting heights including 2000mm/2500/3000/3300/3500/3700/4000/4250/4500/5000/5500/6000mm

品 牌 Brand	Huizelift						
型 号 Model	CPD1030	CPD1530	CPD1830	CPD2030	CPD2530	CPD3030	CPD3530
订货号 Item Number	1.06001	1.06002	1.06003	1.06004	1.06005	1.06006	1.06007
额定载重 Capacity (kg)	1000	1500	1800	2000	2500	3000	3500
起升高度 Lift height (mm)	3000	3000	3000	3000	3000	3000	3000
驱动类型 Drive system	直流或交流 DC/AC						
电控 Electric control system	美国科蒂斯电控 Curtis from America						
门架最低 Mast height after mast fall	1995	1995	1995	1995	1995	2025	2025
蓄 电 池 Battery (V/Ah)	48/330	48/400	48/450	48/560	48/630	80/500	80/500
起升电机 Lifting motor (Kw)	7.5	7.5	7.5	12	12	13.5	13.5
驱动电机 Driving motor (Kw)	8	8	8	11	11	16.6	16.6
货叉外宽 Fork width (mm)	600	600	600	600	600	600	600
自由提升 Free lift height (mm)	140	140	140	150	150	150	150
行驶速度 (%) Walking speed (loaded/without load)	13-15	13-15	13-15	12-14	12-14	14-15	14-15
爬坡能力 (%) Max grade ability (loaded/without load)	12-15	12-15	12-15	13-15	13-15	14-15	14-15
上升速度 Lifting speed (loaded/load)	240/450	240/450	240/450	320/450	320/450	300/400	300/400
下降速度 (m/s) Dropping speed (loaded/without load)	480/420	450/420	480/420	476/426	476/426	260/390	260/390
护顶架高 Overhead guard height	2100	2100	2100	2098	2098	2092	2092
驱动桥负荷 (满载 / 空载) (Kg)	6400/1700	6400/1700	6400/1700	6400/1700	6400/1700	6400/1700	6400/1700
最大牵引力 Max. tractive force	15000N	15000N	15000N	18000N	18000N	20000N	21000N
货叉尺寸 Fork size (mm) L*W*H	1070*122*45	1070*122*45	1070*122*45	1070*125*45	1070*125*45	1070*125*45	1070*125*45
不含货叉车长 Overall length (mm)	2035	2035	2035	2353	2353	2507	2507
车身总宽 Overall width (mm)	1090	1090	1090	1170	1170	1220	1220
车身总高 Overall height (mm)	2050	2050	2050	2050	2050	2050	2050
通道要求 Channel width 1200*1000	3797	3797	3797	4040	4040	4110	4110
回转半径 Turning radius (mm)	1997	2000	2000	2175	2175	2360	2360
车身重量 Weight (Kg)	2960	3120	3200	4214	4270	4950	5010
门架前后仰 Mast tilt (α/β)°	Forward 6° /backward 12°						

电动叉车夹包车
Bale clamp forklift

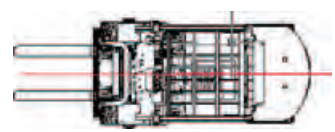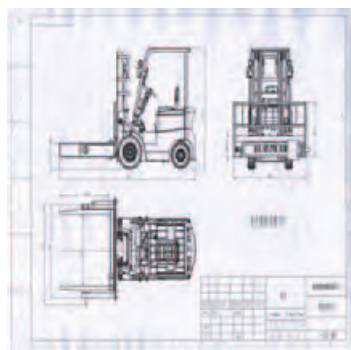

- 电动叉车夹包车优异的滑臂轴承可以使拓展提升范围
- 驾驶视野开阔
- 增压液压阀提供了最佳的手臂速度
- 提供安全的抓力，并给操作者好的抓取提示，同时提供了打包能力
- 经济高效地处理任何类型的打包产品，包括棉花、羊毛、合成、纺织包、波纹、新闻纸、废抹布、干草、金属和其他包


- Proven durable T-beam arm aluminum frame construction
- Superior arm-slide bearing for extended service lift
- Excellent driver visibility
- Regenerative hydraulic valving for optimal arm speed
- Ribe provide secure grip and give driver good tip handling and bale spinning capabilities
- Efficiently and economically handle nearly any type of baled products including cotton, wool, synthetic, textile bales, corrugated, newsprint, rag, hay, metal and other scrap bales

品 牌 Brand	Huizelift			
型 号 Model	CPD1030	CPD1530	CPD1830	CPD2030
订货号 Item Number	1.07001	1.07002	1.07003	1.07004
额定载重 Forklift Capacity (kg)	1000	1500	1800	2000
起升高度 Lift height (mm)	3000	3000	3000	3000
门架最低 Mast height after mast fall	1995	1995	1995	1995
蓄 电 池 Battery (V/Ah)	48/330	48/400	48/450	48/560
起升电机 Lifting motor (Kw)	7.5	7.5	7.5	12
驱动电机 Driving motor (Kw)	8	8	8	11
货叉外宽 Fork width (mm)	600	600	600	600
自由提升 Free lift height (mm)	140	140	140	150
最大爬坡 Max grade ability (%)	13-15	13-15	13-15	13-15
护顶架高 Overhead guard height	2100	2100	2100	2098
驱动桥负荷 (满载 / 空载) (Kg)	6400/1700	6400/1700	6400/1700	6400/1700
货叉夹抱 Fork clamb (Kg)	800	1200	1500	1900
货叉尺寸 Fork opening range (mm)	450-900	450-1200	500-1300	500-1300
叉臂长度 Arm Length (mm)	1200	1150	1150	1000
叉臂高度 Arm Length (mm)	415	415	460	460
不含货叉车长 Overall Length (mm)	2035	2035	2035	2353
车身总宽 Overall Width (mm)	1090	1090	1090	1170
车身总高 Overall Height (mm)	2050	2050	2050	2050
通道要求 Channel Width 1200*1000	3797	3797	3797	4040
回转半径 Turning Radius (mm)	1997	2000	2000	2175
夹抱架重 Clamb Weight (Kg)	316	359	377	405
叉车重量 Forklift Weight (Kg)	3450	3450	3650	4400
门架前后仰 Mast tilt (α/β)°	Forward 6° /backward 12°			

- 可从叉车制造商处获得叉车的实际容量及配件
- 额外的两套叉车需要的油路
- 手臂厚度的 "T" 来自于实际操作空间的要求
- 上述类型皆为标准类型产品，有任何任何特殊要求请联系销售人员

- Obtain the actual capacity of the forklift and attachments from the forklift manufacturer
- Additional two sets of oil circuit required on forklift
- Arm thickness "T" is actual request of operation space
- Above types are the standard types. please contact the sales person for any special request

柴油叉车
Diesel forklift

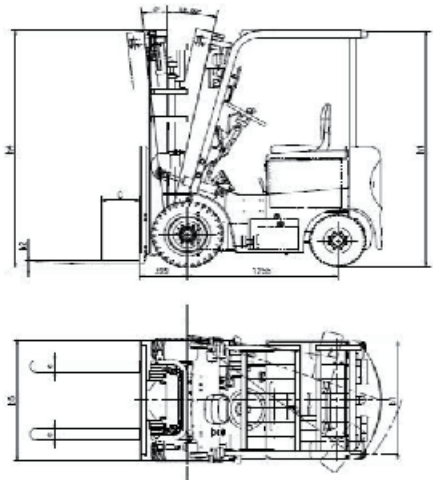


- 柴油内燃平衡重式叉车稳定性好，宜于重载，使用时间无限制
 - 柴油内燃平衡重式叉车发动机动力性较好（低速不易熄火、过载能力、长时间作业能力强），燃油费用低 CPC
 - 柴油内燃平衡重式叉车使用场地一般在室外，如工地、码头
 - 采用人机工程学设计，各操作部件实现了最佳组合，提供了舒适的操作环境，将操作人员疲劳感降至最低
 - 柴油内燃平衡重式叉车采用进口多路换向阀，工作油泵和油缸，确保联合操纵时灵敏的操控反应，提高了液压系统的可靠性
- Diesel engine counterbalanced forklift has good stability, suitable for heavy-duty, no limited usage time
 - Diesel engine counterbalanced forklift has better engine power (low speed is not easy to turn off, overload ability, long time working ability), lower fuel costs
 - Diesel engine counterbalanced forklift usually used outside, such as Construction site, Wharf
 - Use ergonomic design, and best combination of each operating components, providing a comfortable operating environment, minimizing the operator fatigue
 - Diesel engine counterbalanced forklift use imported multi directional valve, working oil pump and oil cylinder, to ensure that the joint operation of the flexible control response, improve the reliability of the hydraulic system


品 牌 Brand	Huizelift						
型 号 Model	CPC1030	CPC1530	CPC2030	CPC3030	CPCD5030	CPCD8030	CPCD10030
订货号 Item Number	1.09001	1.09002	1.09003	1.09004	1.09005	1.09006	1.09007
额定载重 Capacity (kg)	1000	1500	2000	3000	5000	8000	10000
起升高度 Max.Lift height (mm)	3000	3000	3000	3000	3000	3000	3000
动力形式 Power type	柴油 Diesel						
操作类型 Operator type	座驾式 Drive in seat						
门架最大提升高度 Max.lift height of mast with load-backrest(mm)	4030	4030	4030	4262	4280	4380	4320
门架高度 Height of mast(standard)(mm)	1985	1985	2000	2065	2330	2500	2840
自由提升高度 Free lift height (standard)(mm)	125	125	170	160	140	205	100
挡货架高度 Height of load-backrest(mm)	1010	1010	1010	1240	1240	1372	1015
护顶架高度 Overhead guard height(mm)	2070	2070	2090	2090	2450	2450	2560
不含叉总长度 Overall length without fork(mm)	2160	2230	2502	2682	3110	3600	4270
前悬距 Front overhang(mm)	420	420	477	479	565	590	720
后悬距 Rear overhang(mm)	350	424	420	495	553	760	742
轴距 Wheel base(mm)	1400	1400	1600	1700	2100	2250	2800
牵引杆的高度 The height of traction pin(mm)	230	230	290	310	350	395	520
最小离地间隙 Min.ground clearance(mm)	100	100	110	135	160	200	225
总车宽度 Overall width(mm)	1070	1070	1170	1225	1480	1995	2165
叉间距 The distance between forks(mm)	910/125	910/125	1024/200	1060/250	1370/300	1840/300	2460/450

踏板 Tread(front 前 /rear 后)(mm)	890/920	890/920	970/970	1000/970	1180/1190	1470/1700	1600/1800
最小转径（ 外径 ） Min.turning radius(outside)(mm)	1980	2060	2170	2400	2740	3370	4080
最小转径（ 内径 ） Min.turning radius(inside)(mm)	130	130	160	200	270	210	210
最小通道 Min.intersecting aisle(mm)	1785	1865	2200	2380	3365	3060	3540
叉子尺寸 Fork size(mm)	920*100*35	920*100*35	1070*100*40	1070*125*45	1220*150*55	1220*150*75	1220*175*80
最大驾驶速度 Max.drive speeds (满载 with/ 非满载 without full load) km/h	13.5/14.5	13.5/14.5	17/19	18/19	18/19	26/28	20/22
提升速度 Lifting speeds (满载 with/ 非满载 without full load) mm/s	460/500	460/500	530/550	440/480	400	480	340
下降速度 Lowering speeds (满载 with/ 非满载 without full load) mm/s	450/550	450/550	450/550	450/500	350/400	600/300	600/300
最大牵引力 Max.tractive force (满载 with/ 非满载 without full load) Kn	20/15	21/15.2	20/15	20/16	20	65	58
最大爬坡能力 Max.grade ability (满载 with/ 非满载 without full load) %	17/20	18/20	21/20	20/20	18/20	28/18	22
前胎 Front tires	6.50-10-10PR	6.50-10-10PR	7-12-12PR	28*9-15-12PR	3-15-18PR	8.25-15-14PR	9-24-14PR
后胎 Rear tires	5-8-10PR	5-8-10PR	6-9-10PR	6.5-10-10PR	7-12-12PR	8.25-15-14PR	9-24-14PR
总重量 Total weight(Kg)	2280	2680	3320	4270	6400	9850	12860
满载权重分配 Weight Distribution full load(前 front/ 后 rear)(kg)	2830/390	3640/520	4788/532	6543/727	9540/1360	14880/1970	20480/2170
空载权重分配 Weight Distribution zero load(前 front/ 后 rear)(kg)	1220/1000	1170/1490	1328/1922	1708/2562	2630/3770	4070/5800	5770/6880
发动机型号 Engine Model(standard)	XINCHANG NC485BPG		XINCHANG NC490BPG		XICHAL4110	XICHAL6110	
发动机额定输出 Engine Rated output (Kw/rpm)	30/2600		40/2650		60/2200	83/2000	
发动机额定扭矩 Engine Rated torque (n.m/rpm)	131/1800		160/1800-1900		305/1600	450/1450	
发动机额定气缸 Engine Rated No.of cylinder	4-85*100		4-90*105		4*110*125	6-100*125	
发动机排量 Engine Displacement(L)	2.27		2.67		4.752	7.13	
油箱容量 Fuel tank capacity(L)	45		60		100	140	
蓄电池 Battery (V/AH)	12/80		12V/80		24/2*80	24/2*80	
轮胎数量 Quantity of wheels	2*/2						
轮胎类型 Type of tyres	Penumatic tyres						
驾驶制动 Driving brake	Hydraumatic Pedal						
停车制动 Parking brake	Mechanical manual						
传输速度数 Number of speeds for transmission	Manual pallet transmission /Power pallet transmission						

汽油内燃平衡重叉车
Petrol Internal combustion counterbalanced forklift

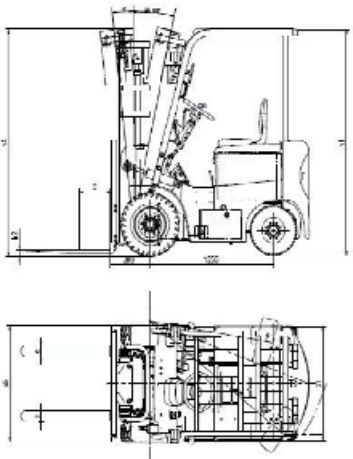


带护顶架全电动堆高车
Overhead-guard electric pallet stacker

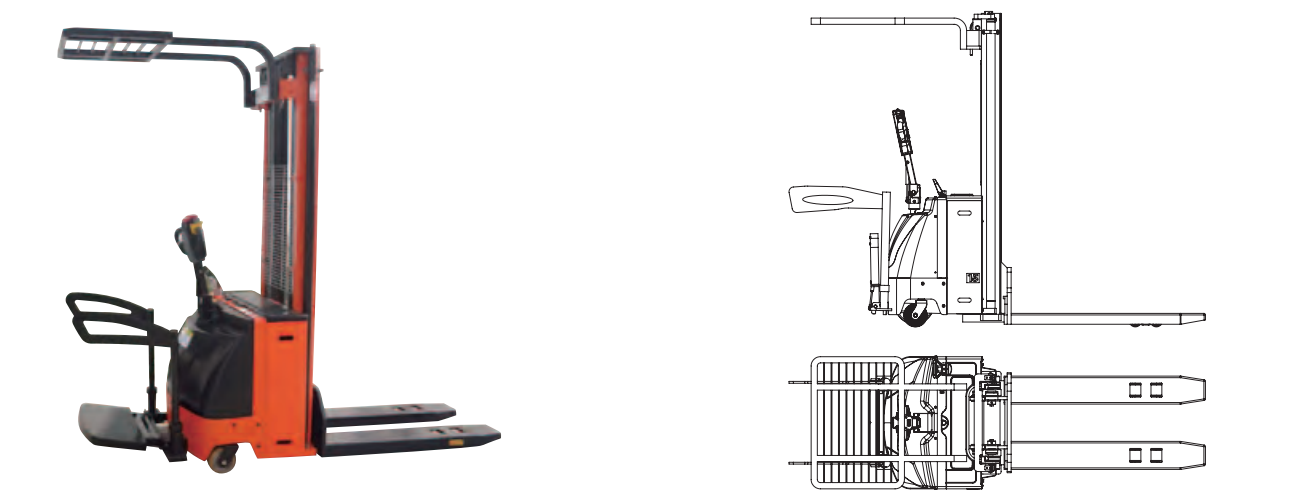

- 带护顶架全电动堆高车门架采用 C 型钢，结构坚固耐用，确保稳定安全
 - 门架上装有安全网，保护操作者免受意外伤害
 - 双油缸起升设计，避免摇晃，保证货物平稳上升
 - 电瓶尺寸和容量可选范围广，方便用户根据实际需要选配
 - 手柄头设计符合人机工程学，操作舒适方便，控制按钮位置设计科学，方便左右手操作
 - 带护顶架全电动堆高车有效地保护操作人员的头部及全身，预防重物落下对人身造成伤害，安全可靠，适用于单面托盘
 - 紧急反向行驶功能，在向后行驶过程中，一旦操作者背后碰到物体，操作者会自然反应用身体撞击手柄反向按钮，车子立即紧急反向行驶，使操作者避免受到伤害
- Mast structure is made of C Shaped steel, firm and durable, stable and safe
 - With safety net in the mast, prevent damages and ensure the safety of operators
 - Double hydraulic cylinder design, avoid shaking, guarantee stable lifting
 - Battery size and volume in wide optional range, could be customized upon application
 - Ergonomics design handle, operated easily and comfortably, button location comply science design, easy to operate for both left and right hands
 - Emergency reserve driving function, in back off process, once operator touched something in behind and pushed reverse button, the truck will drive in reverse direction immediately and prevent personnel from damages

品 牌 Brand	Huizelift				
型 号 Model	CDD3016-F	CDD2025-F	CDD2030-F	CDD1545-F	CDD1052-F
订货号 Item Number	2.20001	2.20002	2.20003	2.20004	2.20005
额定载重 Load Capacity (kg)	3000	2000	2000	1500	1000
起升高度 Max. Lift Height (mm)	1600	2500	3000	4500	5200
蓄 电 池 Battery (V/Ah)	24/240	24/240	24/240	24/210	24/210
充电器 Charger (V/A)	24/35	24/35	24/30	24/30	24/30
提升泵站 Lift Motor (kw)	2.5	2.5	2.5	2.5	2.5
驱动电机 Drive Motor (kw)	AC1.5	AC1.5	AC1.5	AC1.5	AC1.5
护顶架 Overhead Guard Height (mm)	2000	2000	2050	2100	2100
车身重量 Weight (kg)	895	910	940	1030	1010
外形尺寸 Overall Size (LxWxH) (mm)	2000*850*2000	2000*850*1780	2000*850*2050	2000*850*2300	2000*850*2550
折弯货叉 Fork Size (mm)	1150*160*70 (LxWxH)				
货叉外宽 Fork Overall Width (mm)	600				
货叉离地 Min. Fork Height (mm)	85				
底腿尺寸 Outriggers Size (mm)	1000*115*50 (LxWxH)				
驱动轮 Drive Wheel (mm)	φ 250*80 x 1pc				
辅助轮 Auxiliary Wheel (mm)	φ 150*50 x 2pcs				
前轮 Front Wheels (mm)	φ 80*70 x 4pcs				
爬 坡 度 Climbing Slope (%)	4/6				
通道要求 Working Aisle (mm)	2050 转弯 Turning; 880 前进后退 Forwards and Backwards				
行驶速度 (满载 / 空载) Travel Speed (km/h)	4/6 Loaded/Unloaded				
提升速度 (满载 / 空载) Lifting Speed (mm/s)	45/50 Loaded/Unloaded				
下降速度 (满载 / 空载) Falling Speed (mm/s)	45/40 Loaded/Unloaded				
制动方式 Service Brake	电磁制动 Electromagnetic Braking				

平台式全电动堆高车
Electric platform stacker

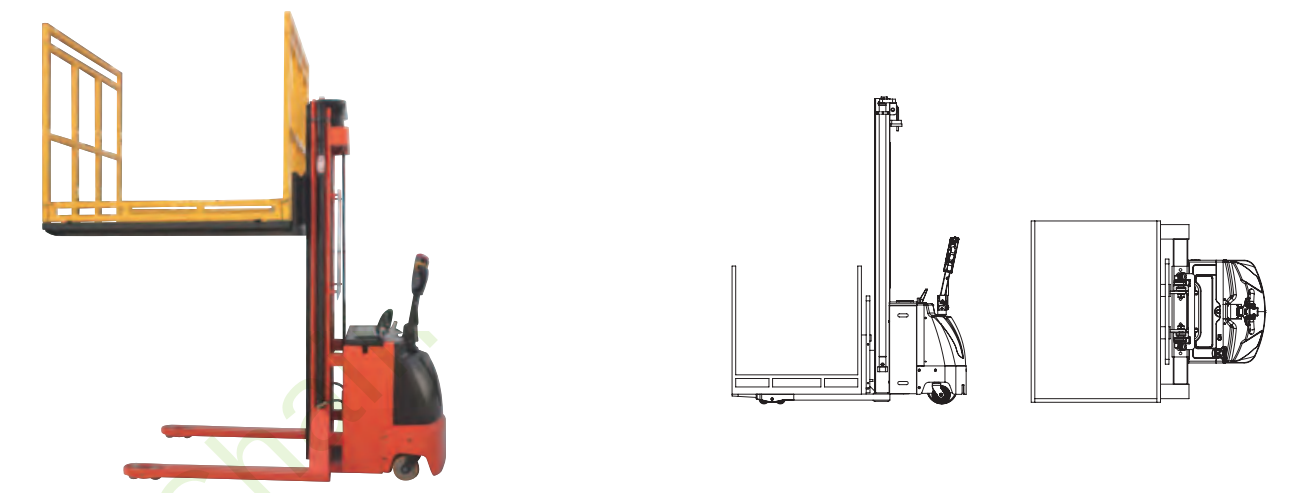

- 平台式全电动堆高车门架两侧双油缸，提升更强劲安全
 - 步行式电动行走，无级变速，电动升降
 - 侧扶手，站驾踏板，电子助力转向，可选配与不配
 - 台湾极智泵站，体积小、可靠性高、工作平稳、节能、降噪、环保，使货物起升平稳有力
 - 国际知名 Curtis 品牌，交流电控系统，操控自如，可靠性高
 - 平台式全电动堆高车将货叉设计成长方形或正方形平台，省去了客户的托盘放货，适合小工件更多的堆放，且有护栏挡板，车身在行驶时货物仍不会落下，大大地提高了工作效率
- Mast with hydraulic cylinder at each side, powerful and safe lifting
 - Battery powered pedestrian driving, continuously variable transmission, electric lifting
 - Hand rail, standing pedal, EPS(electric power steering) as optional setting
 - Taiwan KS lift pump, with small volume, reliable and stable performance, noiseless and environment friendly, guarantee powerful and stable lifting
 - Internationally famous brand Curtis electric controller, AC electric control system, with rapid-response, easy operation and high reliability
 - Electric platform stacker, rectangle or square platform design taking place of forks, saving pallet collecting, proper to load more small parts directly onto platform. Platform with guardrail and barrier, the materials won't fall down in operation, which greatly improves working efficiency

品 牌 Brand	Huizelift				
型 号 Model	CDD0516-P	CDD1525-P	CDD1530-P	CDD1045-P	CDD1052-P
订货号 Item Number	2.30001	2.30002	2.30003	2.30004	2.30005
额定载重 Load Capacity (kg)	500	1500	1500	1000	1000
起升高度 Max. Lift height (mm)	1600	2500	3000	4500	5200
蓄 电 池 Battery (V/Ah)	24/165	24/210	24/210	24/210	24/210
充电器 Charger (V/A)	24/25	24/30	24/30	24/30	24/30
提升泵站 Lift Motor (kw)	2.5	2.5	2.5	2.5	2.5
驱动电机 Drive Motor (kw)	AC1.5	AC1.5	AC1.5	AC1.5	AC1.5
底腿外宽 Outriggers Width (mm)	562	562	562	562	562
车身重量 Weight (kg)	630	880	900	1000	1030
外形尺寸 Overall Size (LxWxH) (mm)	2000*900*2000	2000*900*1780	2000*900*2050	2000*900*2300	2000*900*2550
平台尺寸 Platform Size (mm)	1200*900*600 (LxWxH)				
平台离地 Min. Platform Height (mm)	85				
底腿尺寸 Outriggers Size (mm)	1000*115*50 (LxWxH)				
驱动轮 Drive Wheel (mm)	φ 250*80 x 1pc				
辅助轮 Auxiliary Wheel (mm)	φ 150*50 x 2pcs				
前轮 Front Wheels (mm)	φ 80*70 x 4pcs				
爬 坡 度 Climbing Slope (%)	4/6				
通道要求 Working Aisle (mm)	2300 转弯 Turning; 950 前进后退 Forwards and Backwards				
行驶速度 (满载 / 空载) Travel Speed (km/h)	4/6 Loaded/Unloaded				
提升速度 (满载 / 空载) Lifting Speed (mm/s)	45/50 Loaded/Unloaded				
下降速度 (满载 / 空载) Falling Speed (mm/s)	45/40 Loaded/Unloaded				
制动方式 Service Brake	电磁制动 Electromagnetic Braking				

全自动纸筒夹抱翻转车 (适合夹起竖立的纸筒)
Full automatic paper roll lifter and rotator (suitable for clamping erect rolls)



- 全自动纸筒夹抱翻转车两边夹爪一样大，适合夹起竖立的纸卷，薄膜卷
- 夹爪部位有橡胶皮软保护，预防纸卷，薄膜卷有明显夹痕
- 油缸采用高精密封磨管，进口油封，一体式阀芯，方便拆卸和维修
- 可电动翻转 90 度，将竖立的纸卷，薄膜卷变成横向放置于托盘或工作架上
- 选用美国科蒂斯电控，无级变速行驶，有再生制动和紧急反向功能。保护操作人员人身安全
- 适合纸筒、地毯、布料、电缆、线缆、木头、钢卷、轮胎、油桶等圆柱形货物，是圆状物的搬运好帮手
- Both clamps with same size, designed to clamp erect paper rolls, films rolls
- Clamp with soft protection by rubber, well prevent obvious clamping mark from paper rolls, films rolls
- Oil cylinder adopts high precision honing tubes, imported oil seal, one-piece valve core, convenient disassembly and maintenance
- Electric powered 90 degree rotation, change the erect rolls/ reels to horizontal ones on pallets or work stand
- With America Curtis electric controller, continuously variable speed drive, regenerative braking and emergency reverse function to protect the operator' s safety
- Suitable to handle with paper rolls, carpets, cloth, cable, wire, coil, tyre, drum, wood.etc, a good helper for round roll materials

品 牌 Brand	Huizelift				
型 号 Model	CDD0516-Z	CDD1016-Z	CDD0525-Z	CDD1025-Z	CDD1030-Z
订货号 Item Number	5.00001	5.00002	5.00003	5.00004	5.00005
额定载重 Load Capacity (kg)	500	1000	500	1000	1000
起升高度 Max. Lift height (mm)	1600	1600	2500	2500	3000
蓄 电 池 Battery (V/Ah)	24/165	24/165	24/210	24/210	24/210
充电器 Charger (V/A)	24/20	24/20	24/30	24/30	24/30
提升泵站 Lift Motor (Kw)	2.5	2.5	2.5	2.5	2.5
驱动电机 Driving Motor (Kw)	AC1.5	AC1.5	AC1.5	AC1.5	AC1.5
适用直径 Paper Roll Diameter (mm)	φ 800-1200	φ 600-1000	φ 400-800	φ 200-600	φ 100-400
车身重量 Weight (Kg)	710	730	760	790	830
外形尺寸 Overall size(mm)L*W*H (mm)	2500*1650*2000	2300*1450*2000	2100*1250*1780	2000*1050*1780	2000*850*2050
通道要求 Turning Aisle (mm)	2600	2400	2200	2100	2100
行走通道 Walking Aisle (mm)	1700	1500	1300	1100	900
驱动轮 Driving Wheel (mm)	1*φ 250*80				
辅助轮 Auxiliary Wheels (mm)	2*φ 150*50				
前轮 Front Wheels (mm)	4*φ 80*70				
爬 坡 度 Climbing slope (%)	4/6 20				
行驶速度 (满载 / 空载) Travel Speed (km/h)	4/6 Loaded/Unloaded				
提升速度 (满载 / 空载) Lifting Speed (mm/s)	45/50 Loaded/Unloaded				
下降速度 (满载 / 空载) Falling Speed (mm/s)	45/40 Loaded/Unloaded				
制动方式 Service Brake	电磁制动 Electromagnetic braking				

半动纸筒夹抱翻转车 (适合竖立夹起)
Semi-automatic paper roll lifter and rotator (suitable for clamping erect rolls)



- 半动纸筒夹抱翻转车采用成型 C 型钢门架，抗弯强度高
- 耐磨尼龙轮带刹车，确保车体停下后不滑行
- 宽视野门架加装安全防护网，操作员保护手不会受挤压
- 提升动力单元强劲有力，体积小，噪声低
- 适用于造纸、包装、印刷、纺织等行业
- 链条经过 5 倍拉力测试，承重性能好，保证货叉及货物不会因断链而突然掉落
- Use formed C steel mast, high bending strength
- Wearing-resistant nylon wheel with brake, ensure no sliding after stop the machine
- Wide view mast equipped with security fence, protect the operator' s hands won' t get squeezed
- Widely used in paper fabrication ,packaging, printing and textiles industry etc.
- Lifting motor Strong, small size, low noise
- The chain bearing performance good

品 牌 Brand	Huizelift			
型 号 Model	CTS0216-500Z	CTS0525-500Z	CTS0516-1000Z	CTS0530-1000Z
订货号 Item Number	5.01001	5.01002	5.01003	5.01004
额定载重 Capacity (kg)	200	500	500	1000
起升最高 Lift max.height(mm)	1600	2500	1600	3000
抱夹下降后高 Minimum clamp height	520	520	520	520
抱夹宽度 Clamp width (mm)	635-950	635-950	1135-1450	1135-1450
抱夹总长 Clamp length (mm)	820	820	1220	1220
纸卷直径 Paper roll diameter	φ 200-500mm	φ 200-500mm	φ 600-1000mm	φ 600-1000mm
载荷中心 Load center (mm)	350	350	700	700
车身重量 Weight (Kg)	498	550	560	640
外形尺寸 Over size(mm)L*W*H	1700*950*2000	1700*950*1780	1900*1500*2000	1900*1500*1780
通道要求 Channel request(mm)	1900 转弯 Turn	1900 转弯 Turn	2100 转弯 Turn	2100 转弯 Turn
行走通道 Forward and Back request	1000mm	1000mm	1600mm	1600mm
后轮 Real wheels (mm)	2*φ 80*70			
前轮 Front wheels (mm)	2*φ 150*50			
蓄 电 池 Battery (V/Ah)	12/120			
充电器 Charger (V/A)	12/15			
提升泵站 Lifting motor (Kw)	1.6			

手动夹纸车 (适合横向夹起)
New manual paper roll stacker lifter (suitable for clamping the horizontal rolls)



- 手动夹纸车独特的夹爪设计, 可以将横放在汽车或托盘上的纸卷轻松夹起
 - 手动旋转后纸卷变为竖立方向, 旋钮转动使夹具下降, 放下纸卷
 - 底腿的内宽大于纸卷的直径或长度, 或者底腿可以插入托盘下方孔中, 方便操作
 - 车身装有手动泵及压力表, 随时显示夹紧的压力
 - 超静音轮带刹车装置, 车体在停下时不移动, 良好地保护着操作人员的安全
 - 升降液压缸手动液压和脚踏两用, 操作人员可根据自身情况选用, 抗疲劳
- With unique clamp design, can clamp the rolls from the pallets or cars
 - After manual rotation roll into a vertical direction
 - The inner width of the bottom legs is larger than the diameter of the rolls
 - Come with manual pump and pressure gauge, can show the clamping pressure
 - Ultra-quiet belting leather brakes, do not move when stopped, good to protect the safety of the operator
 - With lifting hydraulic manual hydraulic and foot control

品 牌 Brand	Huizelift			
型 号 Model	CTY0210-500	CTY0416-500	CTY0216-500	CTY0416-1000
订货号 Item Number	5.03001	5.03002	5.03003	5.03004
额定载重 Capacity (kg)	200	400	200	400
起升最高 Lift max.height(mm)	1000	1600	1600	1600
抱夹宽度 Clamp width (mm)	700-790	635-950	635-950	1135-1450
抱夹下降后高 Minimum clamp height	300	490	490	520
抱夹总长 Clamp length (mm)	820	820	820	1220
纸卷直径 Paper roll diameter	φ 300-390mm	φ 200-500mm	φ 200-500mm	φ 600-1000mm
载荷中心 Load center (mm)	200	350	350	700
车身重量 Weight (Kg)	300	366	348	395
外形尺寸 Over size(mm)L*W*H	1500*1060*1400	1500*950*2000	1500*950*2000	1900*1450*2000
通道要求 Channel request(mm)	1600 转弯 Turn	1600 转弯 Turn	1600 转弯 Turn	2000 转弯 Turn
行走通道 Forward and Back request	1100mm	1000mm	1000mm	1500mm
后轮 Real wheels (mm)	2*φ 180*50			
前轮 Front wheels (mm)	2*φ 80*70			


平衡重全电动纸筒夹抱翻转车 (适合横向和竖向夹起纸卷)
Full electric counter balance paper roll stacker (suitable for clamping the horizontal rolls and vertical rolls)



- 平衡重全电动纸筒夹抱翻转车采用电脑程序控制, 无级变速
 - 优质 12C 型钢精制宽视野门架; 精制锻打货叉
 - 配重无底腿式, 适用于单、双面托盘
 - 整车结构简单, 操纵灵活, 微动性好
 - 应用于机械、电子、化工、制药、轻纺等仓库车间
- Adopts computer program control, continuously variable transmission
 - The wide-view mast was made of high-quality refined 12Ctype steel with refined forged forks
 - bottomless legged type, suitable for single, double-sided tray
 - Simple body structure, flexible operation, good performance on micro-movement
 - Used in warehouse or workshop in machinery, electronics, chemical, pharmaceutical, textile e industries , cooperated with palletizing operations

品 牌 Brand	Huizelift				
型 号 Model	CPD0516Z-500	CPD0525Z-500	CPD0516Z-1000	CPD0525Z-1000	CPD1025Z-1500
订货号 Item Number	5.04001	5.04002	5.04003	5.04004	5.04005
额定载重 Capacity (kg)	500	500	500	500	1000
起升最高 Lift max.height(mm)	1600	2500	1600	2500	2500
抱夹下降后高 Minimum clamp height	520	520	520	520	520
抱夹宽度 Clamp width (mm)	635-950	635-950	1135-1450	1135-1450	1535-1850
抱夹总长 Clamp length (mm)	820	820	1220	1220	1620
纸卷直径 Paper roll diameter	φ 200-500mm	φ 200-500mm	φ 600-1000mm	φ 600-1000mm	φ 800-1500mm
载荷中心 Load center (mm)	350	350	700	700	800
前倾后仰 α/β	3° /5°	3° /5°	3° /5°	3° /5°	3° /5°
蓄 电 池 Battery (V/Ah)	24/165	24/165	24/210	24/210	24/210
充电器 Charger (V/A)	24/20	24/20	24/30	24/30	24/30
提升泵站 Lifting motor (Kw)	2.5	2.5	2.5	2.5	2.5
驱动电机 Driving motor (Kw)	AC1.5	AC1.5	AC1.5	AC1.5	AC1.5
车身重量 Weight (Kg)	1048	1250	1460	1640	1860
外形尺寸 Over size(mm)L*W*H	2500*950*2000	2500*950*1785	2900*1500*2000	2900*1500*1785	3300*1900*1785
通道要求 Channel request(mm)	2900 转弯 Turn	2900 转弯 Turn	3600 转弯 Turn	3600 转弯 Turn	4000 转弯 Turn
行走通道 Forward and Back request	1000mm	1000mm	1600mm	1600mm	1900mm
驱动轮 Driving wheel (mm)	1*φ 250*80				
辅助轮 Training wheels (mm)	2*φ 150*50				
前轮 Front wheels (mm)	2*φ 178*80				
爬 坡 度 Climbing slope (%)	4/6				
行驶速度 (满载 / 空载) Km/h	Travel speed 4/6				
提升速度 (满载 / 空载) mm/s	Lifting speed 45/50				
下降速度 (满载 / 空载) mm/s	Falling speed 50/45				
制动方式 Braking type	电磁制动 Electromagenetic braking				


电瓶牵引车
Battery towing tractor

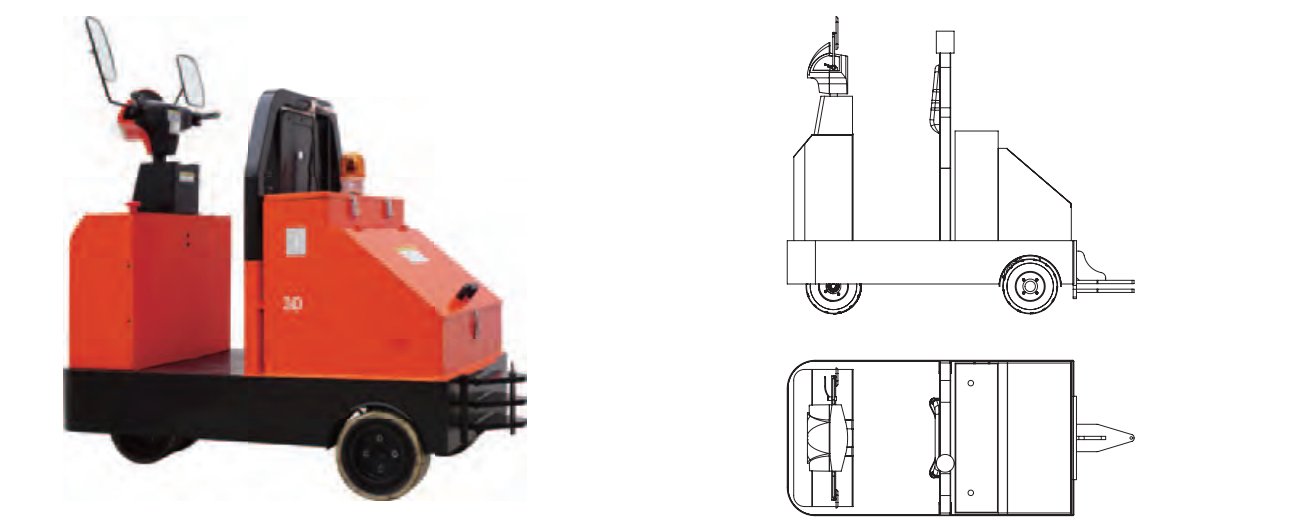

- 电瓶牵引车适合牵引拖挂车，平板车
 - 链接部位可以据客户的车辆进行设计
 - 电瓶牵引车也可实现在轨道上行驶
 - 极小的转弯半径能够在狭小的通道中使用
- Tow Tractor series
 - Electric Tow Tractor
 - Electric Tow Tractor is suitable for towing tractor trailer, flatbed truck
 - Joints can be designed according to customer’ s vehicles
 - Electric Tow Tractor can also be achieved with the track
 - It’ s smallest turning radius made it can be used in a narrow channel

品 牌 Brand	Huizelift		
电瓶牵引车 Electric Tow Tractor	CBD-1T-Q	CBD-2T-Q	CBD-3T-Q
订货号 Item Number	7.00001	7.00002	7.00003
额定牵引 Load traction (kg)	1000	2000	3000
蓄 电 池 Battery (V/Ah)	24/165	24/210	24/210
充电器 Charger (V/A)	24/20	24/30	24/30
驱动电机 Drive Motor (kw)	AC1.5	AC1.5	AC1.5
车身重量 Weight (kg)	486	526	566
外形尺寸 Overall Size (LxWxH) (mm)	2000*850 *1350	2000*850 *1350	2000*850 *1350
驱动轮 Drive Wheel (mm)	φ 250*80 x 1pc		
辅助轮 Auxiliary Wheel (mm)	φ 125*50 x 2pcs		
前轮 Front Wheel (mm)	φ 150*70 x 4pcs		
爬 坡 度 Climbing Slope (%)	4/6		
通道要求 Working Aisle (mm)	2600 转弯 Turning; 900 前进后退 Forwards and Backwards		
行驶速度 (满载 / 空载)Travel Speed (km/h)	4/6 Loaded/Unloaded		
制动方式 Service Brake	电磁制动 Electromagnetic Braking		


站驾式电动牵引车
Stand-on electric towing tractor

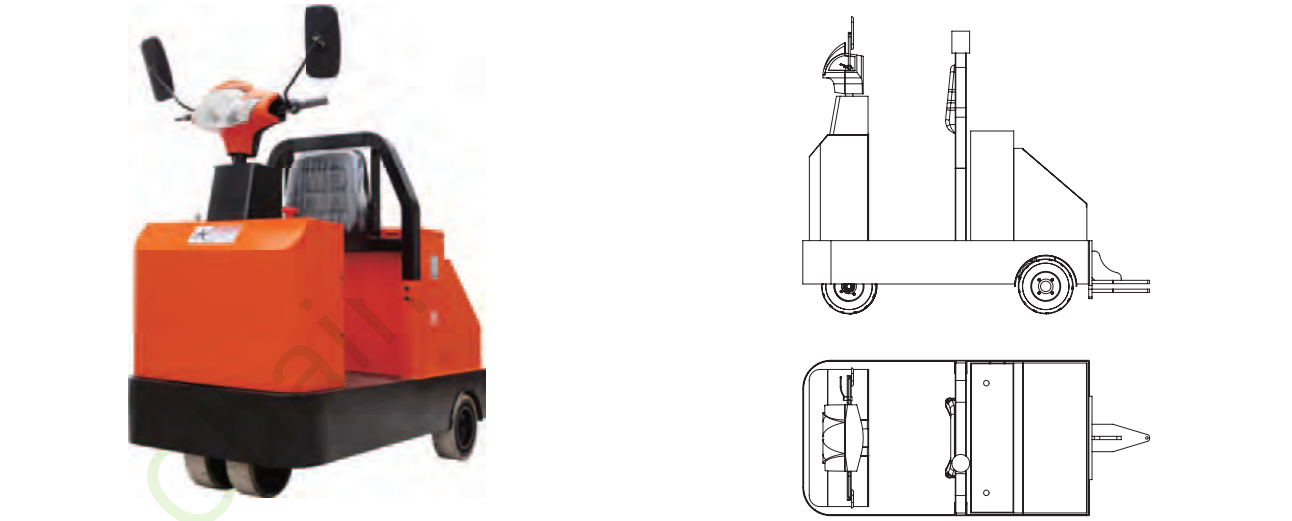

- 48V 大功率站驾式电动牵引车驱动技术以及严谨、科学的人机工程设计有效的保证了整机的可靠性、稳定性和作业效率
 - 电动牵引车采用进口速度控制器实现无极调速、高效、可靠、静音，具有操作顺序、过电压及欠电压保护功能
 - 站驾式操作，视野开阔，非标型可据客户要求订制
- 48V Stand-on electric drive tractor technology with rigorous scientific ergonomic design effectively ensure the machine reliability, stability and operational efficiency
 - The electric tow tractor use Imported speed controller achieve stepless speed regulation , efficient, reliable, mute, with a sequence of operations, over-voltage and under-voltage protection
 - Stand-on operation make the view open.Non-standard type can be customized according to customer requirements

品 牌 Brand	Huizelift		
站驾式电动牵引车 Stand-on electric tow tractor	CBD-1T-QA	CBD-2T-QA	CBD-3T-QA
订货号 Item Number	7.01001	7.01002	7.01003
额定牵引 Load traction (kg)	1000	2000	3000
蓄 电 池 Battery (V/Ah)	48/210	48V/210	48V/210
充电器 Charger (V/A)	48/30	48/30	48/30
驱动电机 Drive Motor (kw)	AC1.5	AC1.5	AC1.5
车身重量 Weight (kg)	539	566	589
外形尺寸 Overall Size (LxWxH) (mm)	2200*1000 *1350	2200*1000 *1350	2200*1000 *1350
驱动轮 Drive Wheel (mm)	φ 250*80 x 1pc		
辅助轮 Auxiliary Wheel (mm)	φ 125*50 x 2pcs		
前轮 Front Wheel (mm)	φ 150*70 x 4pcs		
爬 坡 度 Climbing Slope (%)	4/6		
通道要求 Working Aisle (mm)	2600 转弯 Turning;1100 前进后退 Forwards and Backwards		
行驶速度 (满载 / 空载)Travel Speed (km/h)	4/6 Loaded/Unloaded		
制动方式 Service Brake	电磁制动 Electromagnetic Braking		

5T 重型电动牵引车
5Ton Heavy duty electric towing tractor

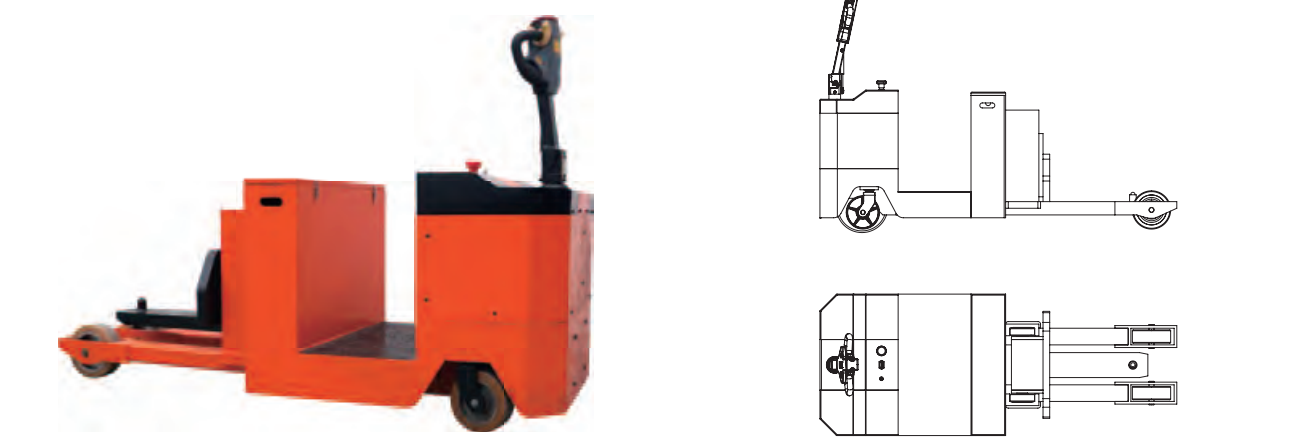

- PVC 刀刮涂层行业\ 网格布涂层布\ 纺织印染行业 A 支架专用 5T 重型电动牵引车
- 采用进口速度控制器实现无极调速、高效、可靠、静音，具有操作顺序、过电压及欠电压保护功能，实现故障自动检测、诊断并在线自动显示
- 性能优良的组合仪表实现运行时间累加计时，蓄电池电量检测，蓄电池容量超下线报警和保护，行走方向及故障代码显示等功能
- 5Ton Heavy electric tow tractor special use in PVC Knife coating industry/Mesh cloth Coated cloth/Textile printing and dyeing Industry
- Using imported speed controller to achieve the stepless speed regulation, high efficiency, reliable, mute, with the sequence of operation, over voltage and under voltage protection function, also has Automatic fault detection, diagnosis and online automatic display
- Excellent combined instrument has the cumulative timing for the running time, battery capacity detection, battery capacity of over the assembly line alarm and protection, walking direction fault code display and other functions

品 牌 Brand	Huizelift
5T 重型电动牵引车 5Ton Heavy electric tow tractor	QDD-5T
订货号 Item Number	7.04001
额定牵引 Load traction (kg)	5000
起升高度 Lifting height (mm)	200
蓄 电 池 Battery (V/Ah)	24/280
充电器 Charger (V/A)	24/40
提升泵站 Lift Motor (kw)	2.5
驱动电机 Drive Motor (kw)	3
助力转向电机功率	200
车身重量 Weight (kg)	760
外形尺寸 Overall Size (LxWxH) (mm)	2145*850 *1448
驱动轮 Drive Wheel (mm)	φ 310*110 x 1pc
辅助轮 Auxiliary Wheel (mm)	φ 200*75 x 2pcs
前轮 Front Wheel (mm)	φ 230*80 x 2pcs
爬 坡 度 Climbing Slope (%)	4/6
通道要求 Working Aisle (mm)	2600 转弯 Turning;900 前进后退 Forwards and Backwards
行驶速度 (满载 / 空载)Travel Speed (km/h)	3.6/4 Loaded/Unloaded
制动方式 Service Brake	电磁制动 Electromagnetic Braking


10T 重型大吨位电动牵引车
10Ton heavy duty electric towing tractor



- 重型大吨位 10T 电动牵引车用于印染，漂整，刀刮涂层，纺织，绣花等行业
- 美国科蒂斯电控无极调速控制
- 大功率立式驱动系统行走动力强劲
- 电子助力转向系统，转弯灵活省力
- 防滑轮经久耐磨，在铁板上或水泥地面行驶不打滑
- The large heavy 10 Ton electric tow tractor use in the industry of Dyeing, bleaching whole, Knife coatings, textiles, embroidery, etc
- American Curtis electric control use for stepless speed regulation
- High power vertical drive system makes the driving force strong
- Electronic power steering system makes turning flexible and labor saving
- Non-slip wheel wear resistant, traveling no skid on the iron plate or cement floor

品 牌 Brand	Huizelift
10T 重型大吨位电动牵引车 Large heavy 10 ton electric tow tractor	QDD-10T
订货号 Item Number	7.05001
额定牵引 Load traction (kg)	10000
起升高度 Lifting height (mm)	200
蓄 电 池 Battery (V/Ah)	48/240
充电器 Charger (V/A)	48/30
提升泵站 Lift Motor (kw)	4
驱动电机 Drive Motor (kw)	3
助力转向电机功率	200
车身重量 Weight (kg)	990
外形尺寸 Overall Size (LxWxH) (mm)	2250*900 *1500
驱动轮 Drive Wheel (mm)	φ 310*110 x 1pc
辅助轮 Auxiliary Wheel (mm)	φ 200*75 x 2pcs
前轮 Front Wheel (mm)	φ 230*80 x 2pcs
爬 坡 度 Climbing Slope (%)	4/6
通道要求 Working Aisle (mm)	3000 转弯 Turning;1100 前进后退 Forwards and Backwards
行驶速度 (满载 / 空载)Travel Speed (km/h)	3.6/4 Loaded/Unloaded
制动方式 Service Brake	电磁制动 Electromagnetic Braking


自行车吊车 (一汽大众款)
 Self-propelled crane (volkswagen factory used)

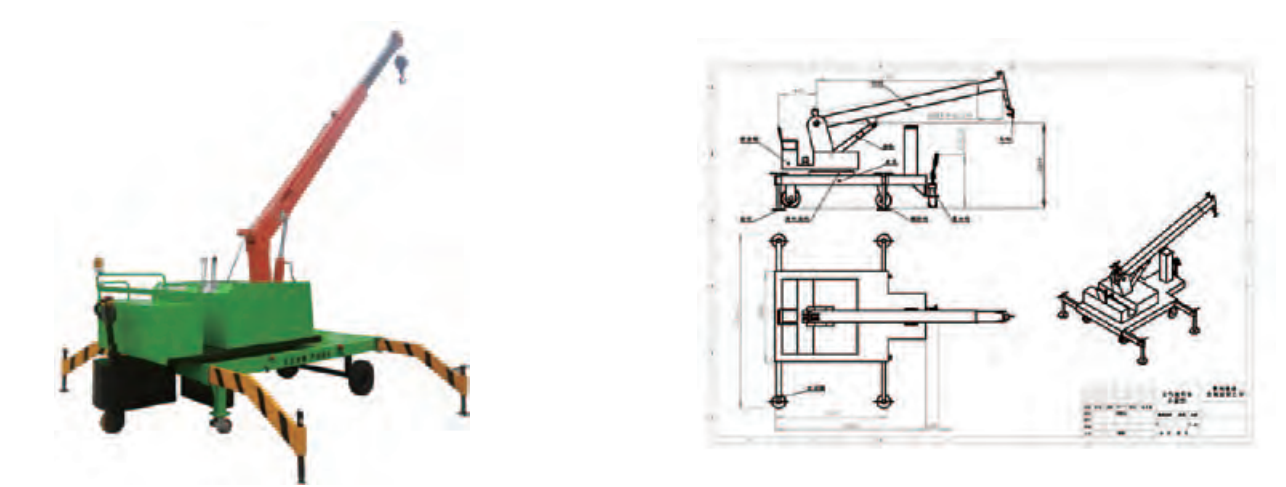

- 自行车吊车，铅酸型牵引蓄电池使用寿命更长久
- 美国科蒂斯电控系统，无级调速，电量显示表及时提醒充电
- 大功率驱动系统驱动更强劲，噪声低，行走匀速
- 智能充电器晚上充电无须看护，自动跳转，白天使用 5-8 小时
- 广泛用于汽车，飞机，摩托，电瓶车，工厂，码头，车站，仓库及中小型设备的维修，吊装
- Lead-acid type towing battery with longer lifetime
- American Curtis electric control system, continuously variable driving speed, volt meter reminds in time recharging to operator
- High power driving system with stronger drive, low noise and drive on same pace
- Intelligent battery charger could be used in night without guarding, auto-switch, guarantee 5-8 hours use in day time
- Widely used in autos, airport, motorcycle, battery bicycle, plant, shipping yard, station, warehouse and maintenance, installation to small and medium mechanicals

品 牌 Brand	Huizelift		
型 号 Model	SDC-II-1T	SDC-II-0.8T	SDC-II-2T
订货号 Item Number	8.08001	8.08002	8.08003
额定起吊 Capacity (kg)	1000	800	2000
起升高度 Lifting Height (mm)	4000	8000	4000
蓄 电 池 Battery (V/Ah)	24/210	24/280	24/240
充电器 Charger (V/A)	24/30	24/40	24/30
提升泵站 Lifting Motor (Kw)	2.5	2.5	2.5
驱动电机 Driving Motor (Kw)	1.5	1.5	1.5
旋转角度 Rotation (°)	360°	360°	360°
伸缩液压缸 Extending Cylinder (mm)	φ63	φ63	φ63
变幅液压缸 Variation Cylinder (mm)	Φ150	Φ150	Φ150
底盘长度 Chassis Length (mm)	2200	3400	2500
底盘宽度 Chassis Width (mm)	1300	1800	1500
支撑脚长 Straddles Length (mm)	800	1000	800
吊臂伸出离底腿最长 Min. Arm Extending Distance from Outriggers (mm)	600	600	600
车身重量 Weight (Kg)	1590	3160	2290
外形尺寸 Over size(mm)L*W*H	3700*1500*2000	6600*1950*2100	3900*1700*1900
通道要求 Turning Aisle (mm)	3900	7000	4100
行走通道 Passing Aisle (mm)	1700	2100	1900
充气轮胎 Pneumatic Tire (mm)	4*φ 500 -80	4*φ 600-90	4*φ 600-90
驱动轮 Driving wheel (mm)	1*φ 250*80		
爬 坡 度 Climbing slope (%)	3/5		
行驶速度 (满载 / 空载)Travel Speed (km/h)	4/6 Loaded/Unloaded		
提升速度 (满载 / 空载) Lifting Speed (mm/s)	45/50 Loaded/Unloaded		
下降速度 (满载 / 空载)Falling Speed (mm/s)	45/40 Loaded/Unloaded		
制动方式 Service Brake	电磁制动 Electromagnetic braking		


电动液压小吊车
 Electric hydraulic crane

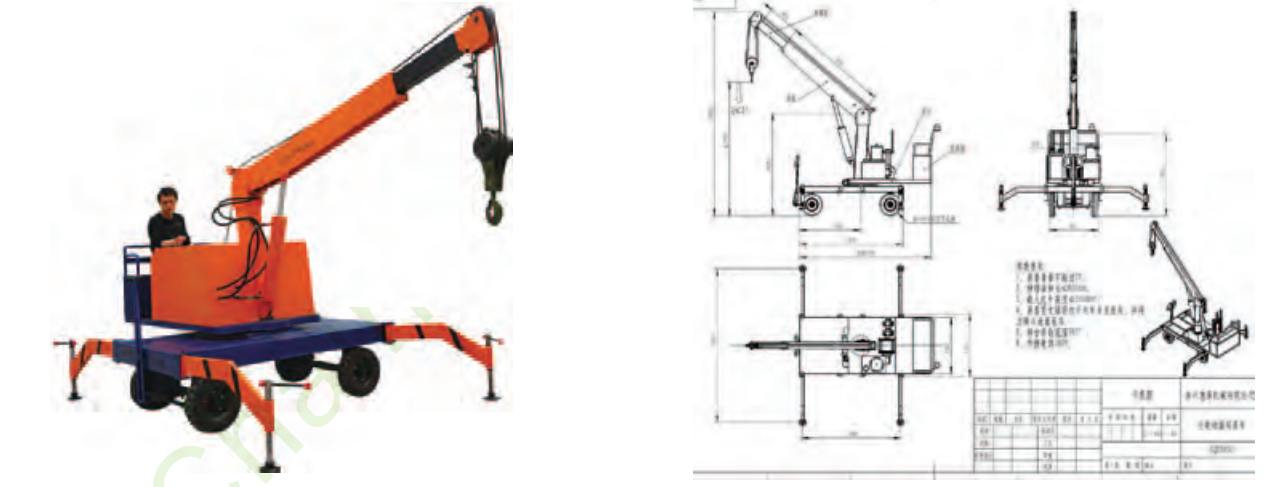

- 电动液压小吊车引进先进技术设计生产
- 外形美观，设计合理，属环保型通用起吊装卸设备
- 手推行走，电动液压升降，电动液压旋转，噪声低
- 适合高频率工作，尤其三班倒企业，大大提高工作效率
- 广泛用于仓库，车间，车站，码头，化工，电子，机械，水利工程，桥梁，建筑，电力公司等行业
- Design and produce upon imported advanced technology
- Pretty outline, reasonable design, it is a generally used environmental friendly lifting and loading device
- Manual driving, electric hydraulic lifting, electric hydraulic rotating with low noise
- Proper for high frequency work shifts, especially for three-shift Company, it could greatly improve working efficiency
- Widely used in warehouse, workshop, station, shipping yard, chemical industry, electronics, mechanical, water project, bridge project, construction, Power Company and many other fields

品 牌 Brand	Huizelift		
型 号 Model	SD-1T	SD-2T	SD-3T
订货号 Item Number	8.09001	8.09002	8.09003
额定起吊 Capacity (kg)	1000	2000	3000
起升高度 Lifting Height (mm)	3000	3000	3000
旋转角度 Rotation (°)	360°	360°	360°
吊臂长度 Arm Reach (mm)	1900-2500	1900-2500	1900-2500
钢丝绳长度 Wire Rope Length (mm)	8000	8000	8000
钢丝绳直径 Wire Rope Diameter (mm)	φ 8	φ 10	φ 12
底盘长度 Chassis Length (mm)	1900	1900	1900
底盘宽度 Chassis Width (mm)	1100	1100	1100
支撑脚长 Straddles Length (mm)	800	800	1000
吊臂伸出离底腿最长 Min. Arm Extending Distance from Outriggers (mm)	600	550	500
抽出液压缸 Extracting Cylinder (mm)	φ 50	φ 50	φ 50
上升液压缸 Lifting Cylinder (mm)	φ 63	φ 80	φ 80
电源电压 Power Voltage (V)	380	380	380
车身重量 Weight (Kg)	1250	1290	1450
外形尺寸 Overall size(mm)L*W*H	3300*1200*1900	3500*1300*1900	3700*1500*1900
通道要求 Turning Aisle (mm)	3500	3700	3900
行走通道 Passing Aisle (mm)	1500	1600	1800
充气轮胎 Pneumatic Tire (mm)	4*φ 400*80	4*φ 500*80	4*φ 500*80


全电动油桶车 (适合塑 \ 铁桶)
Full electric drum handling equipment

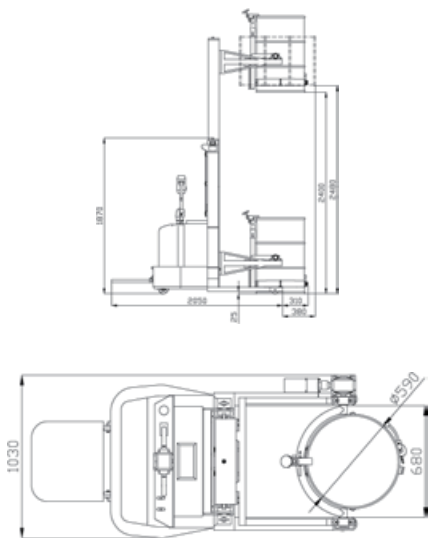

- HZYL600A 全电动油桶搬运车适用于 55 加仑铁桶、 200L 闭口塑料桶的搬运、提升、翻转倒油作业
- 该车采用进口电动车专用行走控制系统，行走稳定，具有轻便、灵活的特性，可单人操作
- 配套的智能型充电器，整个充电过程无需专人监护，更加安全、方便
- Power drive, lift and tilt for ergonomic 55 steel drums and 200L plastic drums pouring
- Imported electrical vehicle exclusive walking control system
- Can be operated by one people, labor saving and high work efficiency
- The matched intelligent charger provides a more safe and convenient usage, needn' t the special inspection during whole charging process

品 牌 Brand	Huizelift
全电动油桶搬运车 Full Electric Drum Handling Equipment	HZYL600A
订货号 Item Number	9.04001
额定载荷 Rated load capacity (Kg)	600
起升高度 Lifting height (mm)	2400
转弯半径 Turning radius (mm)	1910
驱动轮尺寸 Driving wheel size (mm)	Φ250*80
驱动电机功率 Drive motor power (Kw)	1.2
起升电机功率 Lifting motor power (Kw)	2.2
蓄电池电压 / 容量 Battery voltage/capacity(V/Ah)	24/210
充电器 Charger (V/A)	24/30
翻转角度 Rotating range	360°
整车噪音 Noise level db (A)	< 70
自重 Net weight (Kg)	680
爬坡能力 (满载 / 空载) Max. Grade ability(Fully-loaded/no-loaded)	3/5%
轮胎材质 Whells	聚氨酯 PU
驱动形式 Drive type	电动 Full Electric
驾驶方式 Operating type	站驾式 Standing operation
制动方式 Controlling type	电磁制动 Electromagnetic braking

全电动油桶车 (只堆高，不翻转)
Full electric drum stacker (HZYL600B)

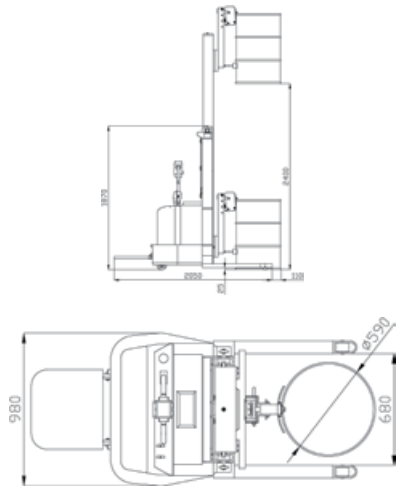

- 全电动油桶堆高车 弓扣式鹰嘴结构 ,主要用于钢桶的堆高、搬运、提升、装卸作业，不翻转倒料
- 采用进口电动车专用行走控制系统，行走稳定，具有轻便、灵活的特性，单人操作
- 行走无级调速器、大功率换向开关、一体化液压泵站、大功率行走驱动轮
- Power drive, transport, lift and tilt 55 gallon steel drums
- Available to carry the drum to rack (lower than 2400mm)
- Imported electrical vehicle exclusive walking control system;
- Can be operated by one people, labor saving and high work efficiency
- With stepless speed regulator, high-power reversing switch, integrated hydraulic pump stations, power walking driving wheel

品 牌 Brand	Huizelift
全电动油桶堆高车 Full Electric Drum Stacker	型号 Model: HZYL600B
订货号 Item Number	9.05001
额定载荷 Rated load capacity (Kg)	600
起升高度 Lifting height (mm)	2400
转弯半径 Turning radius (mm)	1710
驱动轮尺寸 Driving wheel size (mm)	Φ250*80
驱动电机功率 Drive motor power (Kw)	1.2
起升电机功率 Lifting motor power (Kw)	2.2
蓄电池电压 / 容量 Battery voltage/capacity(V/Ah)	24/210
充电器 Charger (V/A)	24/30
整车噪音 Noise level db (A)	< 70
自重 Net weight (Kg)	635
爬坡能力 (满载 / 空载) Max. Grade ability(Fully-loaded/no-loaded)	3/5%
轮胎材质 Whells	聚氨酯 PU
驱动形式 Drive type	电动 Full Electric
驾驶方式 Operating type	站驾式 Standing operation
制动方式 Controlling type	电磁制动 Electromagnetic braking


半电动配重油桶车（无底腿，只堆垛，不翻转）
Semi-electric drum truck stacker



- 无底腿配重式半电动油桶车采用鹰嘴夹爪，能快速的自动夹紧油桶
- 半电动油桶车选用优质液压泵站，动力强劲
- 铅酸水型电池，电力持久
- 特殊轧制工艺制造的 C 型门架，坚固安全；结构简单轻巧，操作简便省力
- 高质量油缸起升速度快，进口密封件，经久耐磨
- 适用于化工、食品、染料、涂料、胶粘剂、石油、食油等流质液体的仓库车间搬运、装卸
- Be equipped with high quality pump station,powerful
- Lead-acid battery,long work service
- C steel plate masts,firm and safely;Simple structure,easy to cooperation
- High quality cylinder,lift quickly
- Imported durable sealing
- be wide used in chemical,printing ,food and painting industry

品 牌 Brand	Huizelift			
型 号 Model	HZCOT0316	HZCOT0516	HZCOT0325	HZCOT0530
订货号 Item Number	9.10001	9.10002	9.10003	9.10004
额定载重 Capacity (kg)	300	500	300	500
起升高度 Lift height (mm)	1600	1600	2500	3000
车身重量 Weight (Kg)	320	336	367	386
外形尺寸 Overall size (mm)L*W*H	1050*710*2000	1050*710*2000	1050*710*1780	1050*710*2050
蓄电池 Battery (V/Ah)	12/120			
充电器 Charger (V/A)	12/15			
提升泵站 Lifting motor (Kw)	1.6			
后轮 Rear wheel (mm)	2*φ 180*50			
前轮 Front wheels (mm)	2*φ 125*50			
通道要求 Channel request (mm)	1100 可以转弯 Turn,750 可以前进后退 Forward and Backward			
提升速度（满载 / 空载）mm/s	Lifting speed 60/100			
下降速度（满载 / 空载）mm/s	Falling speed 90/70			
制动方式 Braking type	脚踏制动 Foot brake			

半电动油桶车（直角支腿，只堆高不旋转）
V-shaped base electric drum stacker (HZDT300)

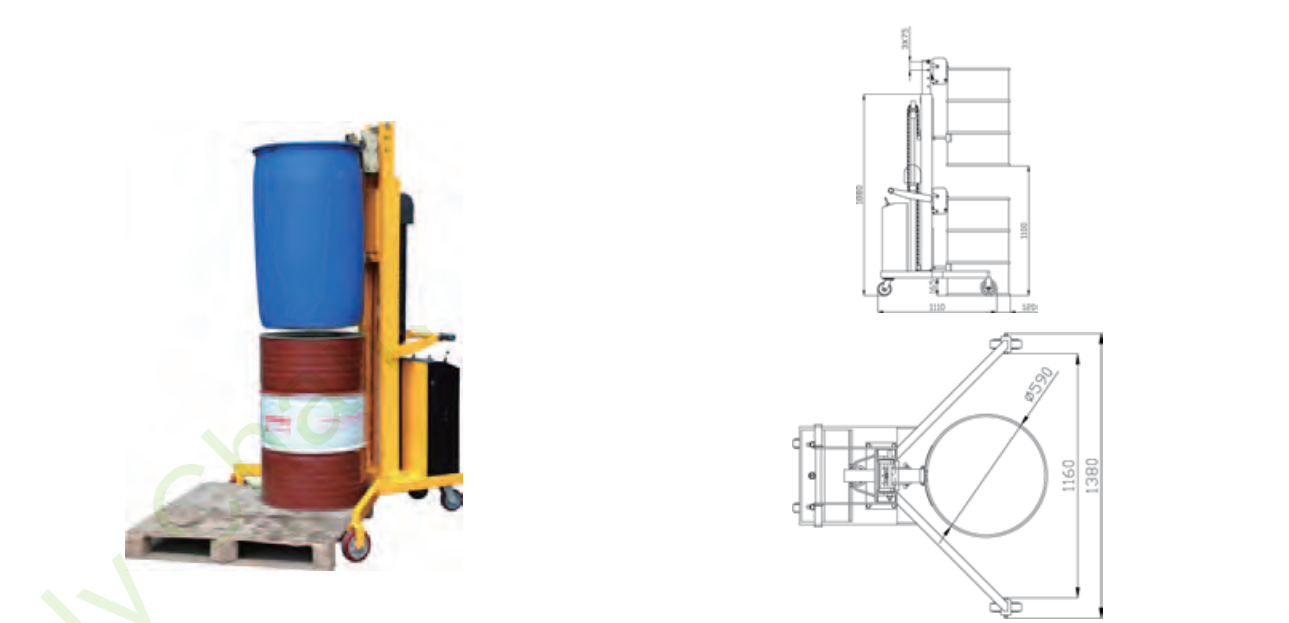


- 半电动油桶车自动式鹰嘴夹，适合带边的闭口塑料桶和钢制油桶
- 表面采用 RAL1028 黄色喷粉
- 适用于托盘上下油桶搬运
- 单、双鹰嘴可选配
- Automatic Eagle-grip grab is suitable for close top, steel drum and plastic drums
- The surface with RAL1028 yellow powder coat
- Suitable for transporting drums on & off pallets
- Optional Single and Double Eagle-grip


品 牌 Brand	Huizelift
直角支腿多功能电动油桶车 Electric Drum Pours	HZDT300
订货号 Item Number	9.11001
额定载荷 Rated load capacity (Kg)	300
升高高度 Lifting height (mm)	upright drum1250/horizontal drum2000
转弯半径 Turning radius (mm)	1230
起升电机功率 Lifting motor power (Kw)	0.8
蓄电池电压 / 容量 Battery voltage/capacity(V/Ah)	12/100
充电器 Charger (V/A)	12/10
后轮 Real wheels (mm)	2*φ 125*50
前轮 Front wheels (mm)	2*φ 150*50
前底腿内宽 Inside width between two legs(mm)	640
前底腿外宽 Outer width between two legs (mm)	800
外形尺寸 Overall size (mm)	1250*840*2200
适合油桶 Acceptable drum size	55 gallon drum
提升速度 Lifting speed (mm/s)	80
自 重 Net weight (Kg)	178

单桶夹具（一次夹 1 只桶，单夹爪，夹塑铁桶）
Forklift drum grab


单桶夹具（一次夹 1 只桶，单夹爪，夹塑铁桶） Forklift Drum Grab

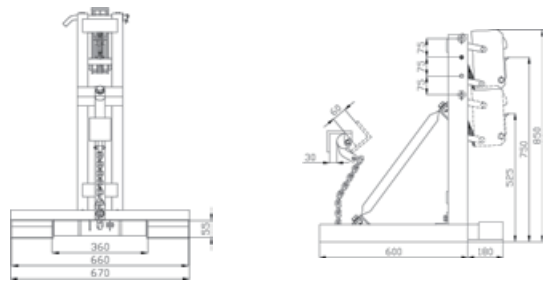


双桶夹具（一次夹 2 只桶，单夹爪，夹塑铁桶）

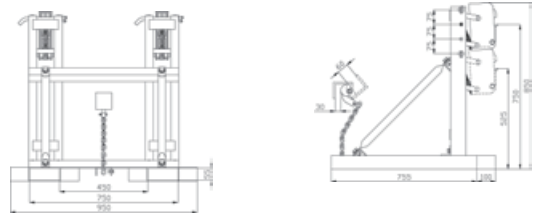

三桶夹具（一次夹 3 只桶，单夹爪，夹塑铁桶）

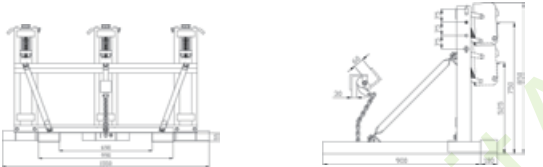

四桶夹具（一次夹 4 只桶，单夹爪，夹塑铁桶）

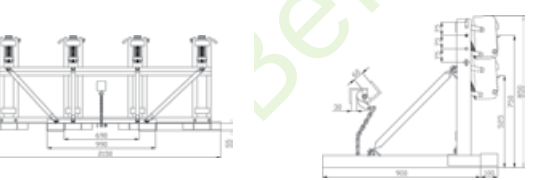


- 单桶夹具叉车专用属具，用于油桶搬运，堆放。拆卸式包装，有利于出口节省空间
- Grab, lift, move and stack drums without the operator leaving driver's seat
- Completely Mechanical and Automatic drum grab requires no hydraulic or electrical connections
- Detachable package can effectively save room


品 牌 Brand	Huizelift			
型号 Model	HZDG360A	HZDG720A	HZDG1080A	HZDG1440A
订货号 Item Number	9.37001	9.37002	9.37003	9.37004
载重 Loading Weight (kg)	360*1	360*2	360*3	360*4
重量 Net Weight (kg)	41	63	98	126

单桶夹具（一次夹 1 只桶，单夹爪，夹塑铁桶）
Forklift drum grab


HZDG360B 单桶夹具（一次夹 1 只桶，双夹爪，夹塑桶）

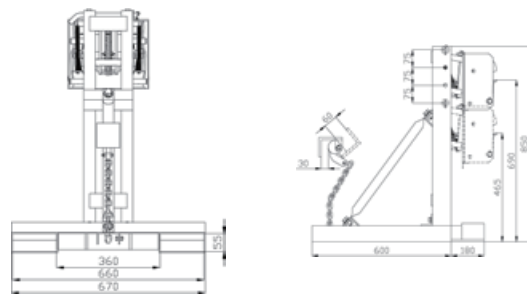


HZDG720B 双桶夹具（一次夹 2 只桶，双夹爪，夹塑铁桶）

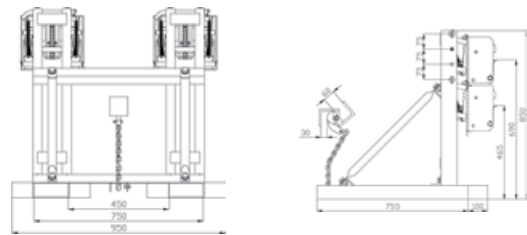

HZDG1500B 三桶夹具（一次夹 3 只桶，双夹爪，夹塑桶）

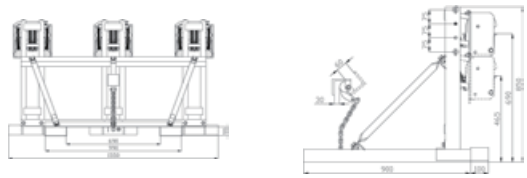


HZDG1440B 四桶夹具（一次夹 4 只桶，双夹爪，夹塑铁桶）

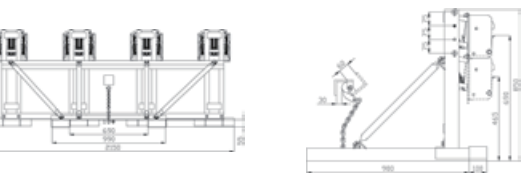

品 牌 Brand	Huizelift			
型号 Model	HZDG360B	HZDG720B	HZDG1080B	HZDG1440B
订 货 号 Item Number	9.37005	9.37006	9.37007	9.37008
载重 Loading Weight (kg)	360*1	360*2	360*3	360*4
重量 Net Weight (kg)	45	75	115	150

- 单桶夹具叉车专用属具，用于油桶搬运，堆放。拆卸式包装，有利于出口节省空间
- Grab, lift, move and stack drums without the operator leaving driver's seat
- Completely Mechanical and Automatic drum grab requires no hydraulic or electrical connections
- Double Eagle-Grip type grabs


剪叉式升降机 (手推行走)
Scissor lift (push by hand)

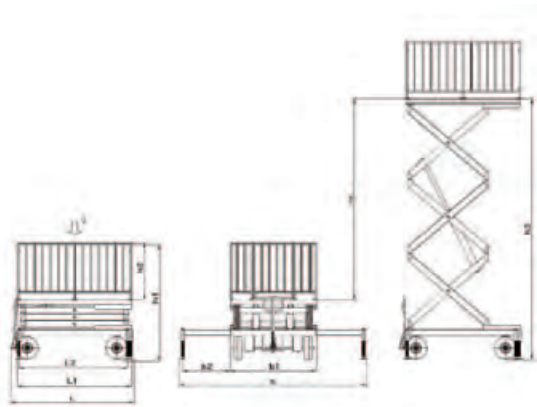

- 剪叉式升降平台可以在空中垂直上升下降，是室内外用途广泛的高空作业专用设备
- 载重 300KG 可升高 4-16 米，载重 500KG 可升高 4-12 米，载重 1000KG 可升高 6-11 米
- 380V50HZ 电源电压三相电，不同国家可配相应的电压和电源插头，确保使用
- 可广泛用于机场，电力，体育馆，商场，车站、码头、桥梁、大厅、厂房，室内外机械安装、设备维修、建筑保养等
- Scissor lift platform is an aerial work equipment which can vertical rise and fall in the air for indoor and outdoor work
- 300KG can be increased 4-16 meters, 500KG can be increased 4-12 meters, 1000KG can be increased 6-11 meters
- voltage: 380V50HZ--three-phase power, for different countries can be equipped with the appropriate voltage and power plug
- It can be widely used in airports, electricity, stadiums, shopping malls, railway stations, docks, bridges, halls, factories, indoor and outdoor machinery installation, equipment maintenance, building maintenance, etc

品 牌 Brand	Huizelift					
剪叉式升降机 Scissor lift	载重 kg Load capacity	起升高度 mm Lifting height	剪臂层数 Shear arm	台面尺寸 Table size	自重 Kg Weight	订货号 Item Number
SJY300-4	300	4000	3	1760*970*850	350	10.01001
SJY300-6	300	6000	4	2000*1120*1150	680	10.01002
SJY300-8	300	8000	4	2000*1120*1400	760	10.01003
SJY300-10	300	10000	6	2150*1150*1450	1450	10.01004
SJY300-11	300	11000	6	2400*1400*1550	1690	10.01005
SJY300-12	300	12000	6	2650*1550*1700	1980	10.01006
SJY300-14	300	14000	7	2650*1550*1850	2490	10.01007
SJY200-16	200	16000	7	3000*1700*2200	3000	10.01008
SJY500-6	500	6000	4	2000*1120*1150	770	10.01009
SJY500-8	500	8000	4	2000*1120*1400	790	10.01010
SJY500-10	500	10000	6	2150*1150*1450	1730	10.01011
SJY500-12	500	12000	6	2650*1550*1900	2870	10.01012
SJY1000-6	1000	6000	4	2000*1120*1150	765	10.01013
SJY1000-7	1000	7000	4	2000*1120*1400	818	10.01014
SJY1000-8	1000	8000	4	2000*1120*1400	1090	10.01015
SJY1000-9	1000	9000	6	2650*1650*1900	1890	10.01016
SJY1000-10	1000	10000	6	2650*1650*1900	2490	10.01017
SJY1000-11	1000	11000	6	2650*1650*1900	3260	10.01018

剪叉式升降机 (蓄电池行走)
Scissor lift (battery-powered driving)

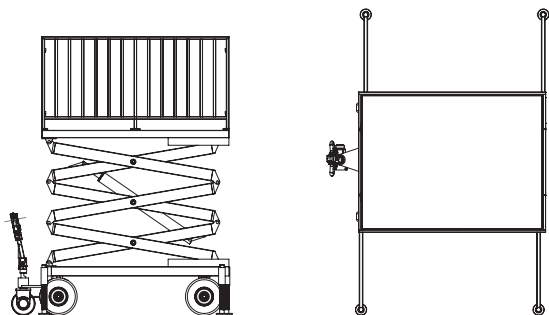

- 剪叉式升降平台（蓄电池行走），人在地面步行行走，在操作台上控制升降机垂直上升下降。
- 24V 驱动系统，蓄电池，电控系统等组成的自动行走，无须手动推拉升降机，减轻工作强度。
- 载重 300KG 可升高 4-16 米，载重 500KG 可升高 4-12 米，载重 1000KG 可升高 6-11 米。
- 380V50HZ 电源电压三相电，不同国家可配相应的电压和电源插头，确保使用。
- 可广泛用于广告牌，幕墙，室内外机械安装、设备维修、建筑保养等。
- Scissor Lift Platform (Battery-powered Driving), driving controlled by operator on floor, vertical lifting up and lowering down controlled on platform.
- 24V driving system, self-propelled system composed by battery, electric controller, etc. No need to pull or push the platform manually to drive, less labor strength to operator.
- Capacity 300kgs platform lift up 4-16m, capacity 500kgs platform lift up 4-12m, capacity 1000kgs platform lift up 6-11m.
- 380v50hz3P electric power, different country platform could be equipped with matching device, making sure local power could be used on platform.
- It could be widely used to mount advertisements sign, panel wall, indoor and outdoor mechanical device, machinery maintenance, building maintenance, etc.

品 牌 Brand	Huizelift					
型号 Model No.	额定载重 Capacity (kgs)	最大平台高度 Lift Height (mm)	起升电机 Lift Motor (kw)	外形尺寸 (L×W×H) Overall Size(mm)	重量 Net Weight (kgs)	订货号 Item No.
SJY300A-4	300	4000	3	21200*970*850	440	10.01001A
SJY300A-6	300	6000	4	2350*1120*1150	770	10.01002A
SJY300A-8	300	8000	4	2350*1120*1400	850	10.01003A
SJY300A-10	300	10000	6	2500*1150*1450	1540	10.01004A
SJY300A-11	300	11000	6	2750*1400*1550	1780	10.01005A
SJY300A-12	300	12000	6	3000*1550*1700	2070	10.01006A
SJY300A-14	300	14000	7	3000*1550*1850	2580	10.01007A
SJY200A-16	200	16000	7	3350*1700*2200	3090	10.01008A
SJY500A-6	500	6000	4	2350*1120*1150	860	10.01009A
SJY500A-8	500	8000	4	2350*1120*1400	880	10.01010A
SJY500A-10	500	10000	6	2500*1150*1450	1820	10.01011A
SJY500A-12	500	12000	6	3000*1550*1900	2960	10.01012A
SJY1000A-6	1000	6000	4	2350*1120*1150	855	10.01013A
SJY1000A-7	1000	7000	4	2350*1120*1400	908	10.01014A
SJY1000A-8	1000	8000	4	2350*1120*1400	1180	10.01015A
SJY1000A-9	1000	9000	6	3000*1650*1900	1970	10.01016A
SJY1000A-10	1000	10000	6	3000*1650*1900	2580	10.01017A
SJY1000A-11	1000	11000	6	3000*1650*1900	3350	10.01018A

自行走升降机（液压轮驱动）
 Self-propelled scissor lift (hydraulic driving wheel)



- 自行走升降机引进国外先进技术，设计新颖独特，使用方便。
- 人在操作台上任意高度可控制升降机行走和转弯，以及上升下降。
- 核心部件采用进口配置，国际知名品牌，经久耐用。国外客户在自己国家可购买到配件。
- 机身有过载安全保护功能，设有防止管路爆裂的防坠保护，安全性能高。
- 广泛应用在建筑，广告，电力，厂房检修，高空设备安装等场所。
- Self-propelled Scissor Lift use developed technology, up to date unique design, convenient to use.
- The driving, turning, lifting up and lowering down operation could be controlled on platform.
- Main parts adopts international famous brand device, durable for long term use. It's easy to get replacing parts in local spare parts store.
- Machine with overload protection safety device, emergency-falling protection caused by hose burst, high safety performance.
- It could be widely used in constructions, advertisements, electric power, factory building maintenance, aerial device mounting etc.

品 牌 Brand	Huizelift					
型号 Model No.	SJY06A	SJY06	SJY08A	SJY08	SJY10	SJY12
订货号 Item Number	10.01001B	10.01002B	10.01003B	10.01004B	10.01005B	10.01006B
最大工作高度 mm Max.Working Height	8000	8000	10000	10000	12000	14000
最大平台高度 mm Max.Platform Height	6000	6000	8000	8000	10000	12000
额定载重 Capacity (kg)	230	230	230	230	230	230
延伸平台载荷 kg Extension Capacity	100	100	100	100	100	100
平台尺寸 (L×W×H)mm Platform Size	2260*810*1100	2260*1130*1100	2260*810*1100	2260*1130*1100	2260*1130*1100	2260*1130*1100
外形尺寸 (L×W×H)mm 护栏未折叠 Overall Size (Guardrail Unfolded)	2475*810*2158	2475*1150*2158	2475*810*2286	2475*1150*2286	2475*1150*2414	2475*1150*2542
外形尺寸 (L×W×H)mm 护栏折叠 Overall Size(Guardrail Folded)	2475*810*1708	2475*1150*1708	2475*810*1836	2475*1150*1836	2475*1150*1964	2475*1150*2094
台面延伸尺寸 Extension Size (mm)	900	900	900	900	900	900
最小离地间隙 mm Min. Ground Clearance	100/20	100/20	100/20	100/20	100/20	100/20
轴距 Wheelbase (mm)	1890	1890	1890	1890	1890	1890
转弯半径 (内轮 / 外轮) Turning Radius (Inner Wheel/External Wheel)	0/2100	0/2200	0/2100	0/2200	0/2200	0/2200
起升 / 驱动电机 V/KW Lift/Driving Motor	24/4.5	24/4.5	24/4.5	24/4.5	24/4.5	24/4.5
升降速度 Lifting Speed (m/min)	3-5	3-5	3-5	3-5	3-5	3-5
机器行驶速度 (收拢状态)km Driving Speed(Lowered)	3.5	3.5	3.5	3.5	3.5	3.5
机器行驶速度 (起升状态)km/h Driving Speed(Lifted)	0.8	0.8	0.8	0.8	0.8	0.8
蓄电池 Battery (V/AH)	4×6/225	4×6/225	4×6/225	4×6/225	4×6/225	4×6/245
充电器 Battery Charger (V/A)	24/25	24/25	24/25	24/2	24/25	24/25
最大爬坡能力 Max. Gradeability (%)	25	25	25	25	25	25
工作最大允许角度° Max. Working Angle	1.5/3	2/3	1.5/3	2/3	2/3	1.5/3
轮胎 Tire (mm)	Φ381×127	Φ381×127	Φ381×127	Φ381×127	Φ381×127	Φ381×127
重量 Weight (kg)	1685	1900	1845	2060	2300	2460

自行走升降机（电动轮驱动）
 Self-propelled scissor lift (electric driving wheel)



- 自行走升降机无须人工牵引，无需外接电源使用。适合各类需登高场所，可以垂直升降的辅助设备。
- 人在操作台上可以控制上升下降，在升降机降到最低位置时，人在操作台上可控制行走和转弯。
- 自行走升降机载重安全，平稳升降，行走匀速，操作简单，维护方便。
- 自行走升降机设有防止停电时应急下降的手控下降阀。可根据客户要求订制。
- 广泛用于机械，化工，水利工程，酒店，宾馆，车站，机场，码头，电子电力等行业。
- Self-propelled Scissor Lift does not need to be manually towed or connected to external power supply. It's applied in all kinds of aerial working place, and a useful vertical lifting/lowering assistant device.
- Operator could control lifting and lowering on platform, driving and turning could also be done on platform at lowest height.
- Self-propelled Scissor Lift with safety load, steady lifting up and down, constant driving speed, easy operation and convenient maintenance.
- It's widely used in machinery, chemistry industry, water engineering projects, hotel, restaurants, train station, airport, shipping yard, electronics and electric power industry etc.

品 牌 Brand	Huizelift						
型号 Model No.	SJYD04A	SJYD04	SJYD06A	SJYD06	SJYD08	SJYD10	SJYD12
订货号 Item Number	10.01001C	10.01002C	10.01003C	10.01004C	10.01005C	10.01006C	10.01007C
最大工作高度 mm Max. Working Height	6000	6000	8000	8000	10000	12000	14000
最大平台高度 mm Max. Platform Height	4000	4000	6000	6000	8000	10000	12000
安全工作载荷 Capacity (kg)	230	230	230	230	230	230	230
延伸平台安全工作载荷 kg Extension Capacity	100	100	100	100	100	100	100
工作平台尺寸 (长 × 宽 × 高) mm Platform Size	2260×810×1100	2260×1130×1130	2260×810×1130	2260×1130×1100	2260×1130×1100	2260×1130×1100	2260×1130×1100
外形尺寸 (L×W×H) 护栏未折叠 mm Overall Size (Guardrail Unfolded)	2475×810×2029	2475×11700×2029	2475×810×2213	2475×1170×2213	2475×1170×2341	2475×1170×2469	2475×1170×2597
外形尺寸 (L×W×H) 护栏折叠 mm Overall Size(Guardrail Folded)	2475×810×1579	2475×1170×1579	2475×810×1763	2475×1170×1763	2475×1170×1891	2475×1170×2019	2475×1170×2149
台面延伸尺寸 Extension Size (mm)	900	900	900	900	900	900	900
最小离地间隙 mm Min. Ground Clearance	100/20	100/20	100/20	100/20	100/20	100/20	100/20
轴距 Wheelbase (mm)	1920	1920	1920	1920	1920	1920	1920
转弯半径 (内轮 / 外轮) mm Turning Radius(Inner Wheel/External Wheel)	0/2100	0/2100	0/2100	0/2200	0/2200	0/2200	0/2200
驱动电机 Driving Motor (kw)	2×24V/0.75kw	2×24V/0.75kw	2×24V/0.75kw	2×24V/0.75kw	2×24V/0.75kw	2×24V/0.75kw	2×24V/0.75kw
起升电机 Lifting Motor (kw)	24V/2.0kw	24V/2.0kw	24V/2.0kw	24V/2.0kw	24V/2.0kw	24V/2.0kw	24V/2.0kw
升降速度 Lifting Speed (m/min)	3-5	3-5	3-5	3-5	3-5	3-5	3-5
机器行驶速度 (收拢状态) km/h Driving Speed(Lowered)	4.0	4.0	4.0	4.0	4.0	4.0	4.0
蓄电池 Battery (V/AH)	4×6V/180ah	4×6V/180ah	4×6V/180ah	4×6V/180ah	4×6V/180ah	4×6V/180ah	4×6V/210ah
充电器 Battery Charger (V/A)	24V/25A	24V/25A	24V/25A	24V/25A	24V/25A	24V/25A	24V/25A
最大爬坡能力 Max. Gradeability (%)	25	25	25	25	25	25	25
工作最大允许角度° Max. Working Angle	1.5° /3°	2° /3°	1.5° /3°	2° /3°	2° /3°	2° /3°	1.5° /3°
轮胎尺寸 (驱动轮) mm Tire Size(Driving Wheel)	Φ250×80	Φ250×80	Φ250×80	Φ250×80	Φ250×80	Φ250×80	Φ250×80
轮胎尺寸 (非驱动轮) mm Tire Size(Non-driving Wheel)	Φ300×100	Φ300×100	Φ300×100	Φ300×100	Φ300×100	Φ300×100	Φ300×100
整机重量 Weight (kg)	1525	1740	1685	1900	2060	2300	2460


曲臂升降机 (电动)
Boom lifts (electric)



- 曲臂式升降机手推行走,380V50HZ 电源电压升降
- 四只液压支撑腿,收放自如,支撑地面,校正平衡保证操作人员升高后安全作业.
- 人在操作台可控制上升,下降,旋转 360 度
- 折叠式升降臂可跨越障碍物工作,旋转半径大,广泛用于电力,路政,建筑,水利,环卫,广告,通信等行业
- Boom Lift push with hand, up and down by 380V50HZ
- Four hydraulic legs with acting freely, supporting on the ground, and correct balance to ensure operators work safety after increased in the air
- operators on the platform can control up, down, rotate 360 degrees
- Folding lift can work across an obstacle, a large radius of rotation, widely used in electricity, highways, buildings, water, sanitation, advertising, telecommunications and other industries

品 牌 Brand	Huizelift						
曲臂电动升降机 Boom Lift	载重 kg Load capacity	起升高度 mm Lifting height	电源电压 V/HZ supply voltage	操作台尺寸 Platform size	外形尺寸 Over size mm	重量 kg Weight	订货号 Item Number
GTZ160-6	160	6000	380/50	900*600	1760*970*850	960	10.02001
GTZ160-8	160	8000	380/50	900*600	2000*1120*1150	1320	10.02002
GTZ160-10	160	10000	380/50	900*600	2000*1120*1400	1650	10.02003
GTZ160-12	160	12000	380/50	900*600	7200*2000*1900	2040	10.02004
GTZ160-14	160	14000	380/50	900*600	7500*2000*2050	2260	10.02005

折臂升降机 (柴油)
Folding boom lifts (diesel)

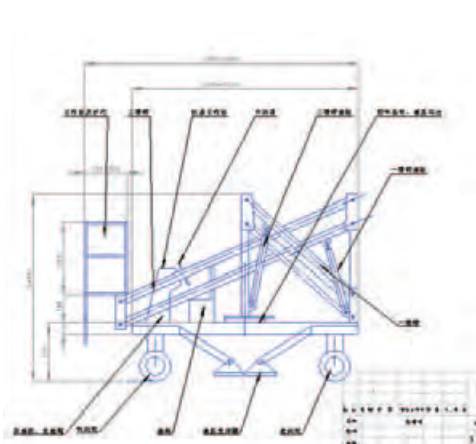

- 曲臂升降机也叫高空作业车又名电力抢修车, 路灯维修车, 登高车, 升降车, 高空作业车分为折臂式和液压伸缩式, 是国内外园林绿化、石油化工、市政环卫, 广告建筑等常用工具
- 曲臂升降机操作台进出后置, 方便进出, 通过性好. 升降臂作业效率高范围大. 工作臂受力好, 采用高强度材料制作, 可靠性好. 设有应急动力源, 给予更多保护
- 柴油动力作业, 座驾式行驶, 适合远近距离野外作业
- 操作方便, 作业效率高. 支腿跨距大, 稳定性好, 适应各种地面工况
- Boom lift, also known as Overhead Working Truck, electric power rush-repaircar, Street lamp maintenance vehicle, Ladder truck, lift trucks. Overhead Working Truck divided into folding arm and telescopic hydraulic, is a common tool for landscaping, petrochemical, municipal sanitation, advertising, construction
- Operation platform on the Boom Lift with Postposition access channel, easy access and out. Boom Lift with Large work range and high operating efficiency
- Arms with good work force, made with high strength material, good reliability
- Emergency power source to provide more protection
- Diesel-powered, car driving style, suitable for short and long distance field work
- Easy operation, high efficiency. Outrigger span, good stability, adapt to a variety of ground conditions

品 牌 Brand	Huizelift			
折臂式柴油升降机 Folding boom lifts (diesel)	GTZ200-8.5	GTZ200-10.5	GTZ200-12.5	GTZ200-13.5
订货号 Item Number	10.03001	10.03002	10.03003	10.03004
载重 (kg) Load capacity	200	200	200	200
作业高度 (mm) Working height	8500	10050	12500	13500
最大作业半径 Maximum radius	2500	3000	3500	4000
长臂长度 Long arm length	3500	4150	5000	5400
长臂矩形管 Long rectangular tube	150*100*5	150*100*5	150*100*5	150*100*5
短臂长度 Short arm length	2700	2850	3000	3600
立柱高度 Column height	1800	2050	2300	2300
立柱矩形管 Vertical column rectangular tube	130*115*5	130*115*5	130*115*5	130*115*5
操作平台 Operating platform	700*550*1000	700*550*1000	700*550*1000	700*550*1000
底盘尺寸 Chassis Size	3470*1800	3500*1800	3800*2000	4400*2000
登高梯层数 Climbing ladder number	1	3	4	4
外形尺寸 Over size mm	4000*1800*2600	4150*1800*2850	4800*2000*3150	5100*2000*3150
重量 (kg) weight	1590	1700	1760	1850

移动式工具车 (电动)
Mobile tool cart (electric)



- 电动移动式工具车 24V 蓄电池上升下降
 - 提升泵站动力强劲，噪声低，速度均匀
 - 扶手经过电镀处理，不生锈
 - 配智能充电器，白天使用夜晚充电
 - 广泛用于电子，服装，机械，化工，医药，包装等各行业
- 24V battery for rise and fall
 - Lifting motor is powerful, low noise, uniform speed
 - Handrail after plating, does not rust
 - With a smart charger, Daytime use and charging in night
 - Widely used in electronics, clothing, machinery, chemicals, pharmaceuticals, packaging and other industries

品 牌 Brand	huizelift			
型 号 Model	TF1-0309	TF1-0509	TF2-0313	TF2-0513
订 货 号 Order Number	10.16001	10.16002	10.16003	10.16004
额定载重 Capacity (kg)	300	500	300	500
起升高度 Lift height (mm)	900	900	1300	1300
台面尺寸 Paltfrom size(mm)	900*600	900*600	900*600	900*600
车身重量 Weight (Kg)	349	386	427	456
蓄 电 池 Battery (V/Ah)	12/120			
充 电 器 Charger (V/A)	12/15			
提升泵站 Lifting motor (Kw)	1.6			
外形尺寸 Overall size (mm)	1600 长 *700 宽 *1200 高 (L*W*H)			
轮 子 Wheels (mm)	4*φ 125*50			
通道要求 Channel request (mm)	1800 可以转弯 Turn,800 可以前进后退 Forward and Backward			
提升速度 (满载 / 空载) mm/s	Lifting speed 60/100			
下降速度 (满载 / 空载) mm/s	Falling speed 90/70			
制动方式 Braking type	脚踏制动 Foot brake			

移动式工具车 (手动)
Mobile tool cart (manual)



- 移动式工具车常用于仓库车间内辅助搬运的工具
 - 剪叉的层数取决于工具车的提升高度和台面尺寸
 - 台面可订制成滚筒型，抽出加长型，超宽型，旋转平台型，加装夹具型等
 - 升降液压缸经过电镀，调质处理，密封件采用台湾进口件，密封性能高，经久不漏油
- Mobile Tool Cart commonly used as assist moving tool in the warehouse and workshop
 - The number of scissors layers depends on the lift height and table size of tool car
 - Paltfrom can be customized into a drum type, taking lengthened, extra large type, rotating platform type, the installation of the fixture type
 - Moving cylinder after plating, quenching, seal parts imported from Taiwan, high sealing performance, long-term not leak

品 牌 Brand	huizelift				
型 号 Model	TF1-0309	TF1-0509	TF2-01512	TF2-0313	TF2-0513
订 货 号 Order Number	10.17001	10.17002	10.17003	10.17004	10.17005
额定载重 Capacity (kg)	300	500	150	300	500
起升高度 Lift height (mm)	900	900	1200	1300	1300
台面尺寸 Paltfrom size(mm)	900*600	900*600	900*600	900*600	900*600
车身重量 Weight (Kg)	52	69	107	116	140
外形尺寸 Overall size (mm)	1100 长 *600 宽 *1000 高 (L*W*H)				
轮 子 Wheels (mm)	4*φ 125*50				
通道要求 Channel request(mm)	1200 可以转弯 Turn,700 可以前进后退 Forward and Backward				
制动方式 Braking type	脚踏制动 Foot brake				

空心千斤顶 (双作用)
Hydraulic tension jack



- 空心千斤顶也叫穿心千斤顶，张拉顶，空心柱塞顶
- 广泛用于应力施工，桥梁修造，公路及铁路建设，电动电站修造，设备提升，机械拆卸等方面
- 中心孔可供电线，钢筋穿过，中心孔径可根据用户需要进行加工
- This model is also named tension jack,Hollow cylinder
- Be widely used in then contraction of bridge,railway,road and power station. Wire and bars can run across trough the holes. The diameter of holes can be customized according working requirements.Short extra height

品 牌 Brand	Huizelift				
双作用空心千斤顶 Jack (Model)	RRH30-178	RRH30-257	RRH60-89	RRH60-165	RRH60-257
货 号 Item Number	11.08001	11.08002	11.08003	11.08004	11.08005
起 重 量 Load capacity (T)	30	30	60	60	60
行 程 Stroke (mm)	178	257	89	165	257
本体高度 Retracted height(mm)	330	432	248	324	438
最高高度 Max height (mm)	508	689	337	489	695
外 径 outside diameter(mm)	114	114	159	159	159
中心孔径 Hole through spindle ϕ	33.3 ϕ	33.3 ϕ	53.8	53.8	53.8
重 量 weight (kg)	22	27	28	35	46
包装尺寸 Packaging size (mm)	120*120*350	120*120*700	170*170*350	170*170*510	170*170*710

双作用空心千斤顶 Jack (Model)	RRH100-38	RRH100-76	RRH100-152	RRH100-257	RRH150-203
货 号 Item Number	11.08006	11.08007	11.08008	11.08009	11.08010
起 重 量 Load capacity (T)	100	100	100	100	150
行 程 Stroke (mm)	38	76	152	257	203
本体高度 Retracted height(mm)	165	254	342	460	349
最高高度 Max height (mm)	203	330	495	718	552
外 径 outside diameter(mm)	213	213	213	213	248
中心孔径 Hole through spindle ϕ	79.2 ϕ	79.2 ϕ	79.2	79.2	79.5
重 量 weight (kg)	39	61	79	107	111
包装尺寸 Packaging size (mm)	230*230*180	230*230*280	230*230*360	230*230*480	270*270*370

轴承加热器 HA 型 Micro-control bearing heater



- HA 系列轴承加热器采用合金塑料外壳，体积更小巧，外形更美观
- 滑轮可移动结构，搬运方便灵活
- 环保无油烟污染，有利于改善工作环境和自然环境
- 操作简便，加热均匀，无明火危险
- Bearing heater induction heating 250 degrees temperature
- Alloy plastic sheel, beautiful appearance, small volume
- Easy Transpotation, safe and simple operation

品 牌 Brand	Huizelift		
轴承加热器 Micro-control Bearing Heater	HA-1	HA-2	HA-3
货 号 Item number	12.00001	12.00002	12.00003
额定功率 Rated Power (KVA)	2.2	3.3	5.5
额定电压 Rated Voltage (V)	220	220	380
工件内径 Working Piece Inner Diameter (mm)	30-70	50-100	70-200
工件外径 Outside Diameter (mm)	250	360	440
工件宽度 Outside Width (mm)	110	115	140
外形尺寸 Overall dimension (mm)	330x330x345	330x330x345	330x330x345
加热温度 Heating temperature ($^{\circ}\text{C}$)	Max.250 Degrees	Max.250 Degrees	Max.250 Degrees
重 量 Weight (kg)	17	20	35
控制方式 Control	温控 temperature/ 时控 time/ 手控 manual		

轴承加热器 ZRQ 型 Micro-control bearing heater



- ZRQ 系列轴承加热器节电 90%，工作效率提高，提高装配质量
- 滑轮可移动结构，搬运方便灵活
- 环保无油烟污染，有利于改善工作环境和自然环境
- 操作简便，加热均匀，无明火危险
- Bearing heater induction heating 250 degrees temperature
- Alloy plastic sheel, beautiful appearance, small volume
- Easy Transpotation, safe and simple operation

品 牌 Brand	Huizelift				
轴承加热器 Micro-control Bearing Heater	ZRQ-1	ZRQ-2	ZRQ-3	ZRQ-4	ZRQ-5
货 号 Item number	12.01001	12.01002	12.01003	12.01004	12.01005
额定功率 Rated Power (KVA)	3	3.5	4	6	8
额定电压 Rated Voltage (V)	220	220	380	380	380
工件内径 Inner Diameter (mm)	35-90	65-160	90-220	120-280	160-350
工件外径 Outside Diameter (mm)	250	360	380	400	440
工件宽度 Outside Width (mm)	100	110	110	110	110
外形尺寸 Overall dimension (mm)	500x380x320	500x380x320	500x380x320	685x478x330	685x478x330
加热温度 Heating temperature ($^{\circ}\text{C}$)	Max.250	Max.250	Max.250	Max.250	Max.250
重 量 Weight (kg)	20	25	35	65	80
控制方式 Control	温控 temperature/ 时控 time/ 手控 manual				


手推扫地机 PD-S326
Hand push broom



- 手推扫地机 80Ah 超大容量的蓄电池，有效保证工作时间
- 采用新型材料的轮胎外圈，增加了使用寿命
- 简洁的操作系统，让使用者更易操作
- 可调的主刷边刷系统，提高了耗材的使用寿命
- 内置吸尘系统，有效减少粉尘的挥散
- Hand push sweeping machine use 80Ahsuper capacity battery,effectively guarantee the working time
- With new material of tire outer ring,increase its service life
- Simple operating system,more easy to operate
- Adjustable main brush system,improve the service life of the material
- Built-in dust collection system,effectively reduce dust to tucson

品 牌 Brand	Huizelift
手推扫地机 PD-S326 Hand push broom	PD-S326
货 号 Item number	13.00003
清扫宽度 Sweeping paths (mm)	650
工作效率 Work efficiency (m²/h)	2800
主刷长度 The length of the brush (mm)	400
动力源 Power supply (V/Ah)	12/80
连续工作时间 Continuous (h)	4
垃圾箱容量 The bin capacity (L)	36
边刷直径 The sidebrush diameter (mm)	300
驱动电机功率 Drive power motor (W)	700
作业电机功率（主刷 / 风机 / 边刷） Operating power motor(Brush dust/blower/side brush)	120/60/30W
过滤面积 Filter area (m²)	1.5
净重 N.W (kg)	75

全自动带洒水扫地机 PD-S373
Electric battery outdoor push sweeper

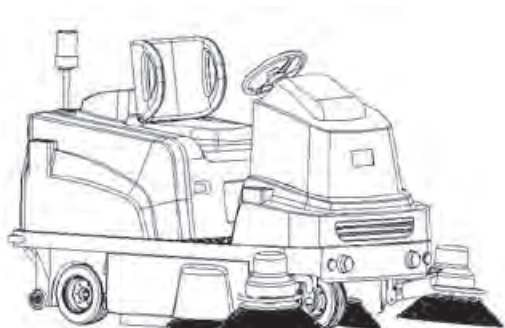

- 室外全自动扫地机内置强力控尘系统，吸尘能力更强，扫地宽度 1900MM
- 自动升降主刷与边刷，前边刷可调式对路牙侧面和正面进行清扫，并遇到障碍物时可调式回缩并自动复位
- 采用先进的高性能免维护电池，不漏液，不产生有害气体
- 拥有国际先进的清扫抛甩技术，尘箱利用率理论值可达 100%
- 大型粉尘过滤网，可完全清理灰尘，电动震动器可以自动清洁过滤网
- 钢制底盘，承重力强，配置持久耐用型轮胎，终身不需要更换
- 进口电控系统，过流，欠压保护，加重底盘，垃圾箱容量更大
- 人性化的座椅设计，舒适自在。前后距离可调，适合不同身材的人操作
- The built-in power dust control system,dust absorption ability is stronger,the sweep floor width to 1900mm
- Automatic lifting of main brush adn brush,the front bursh adjustable cleaned right tooth flank and front,and meet with obstacles can be condensed and automatic reset back
- Advanced high-performance maintenance-free batteries,no leakage,no harmful gases
- Has the internationl advanced technology of cleaning to throw,utilization ratio of the theoretical value of 100%
- Large dust filter ,can be completely clear dirt,electric vibrator can automatically clean screen pack
- Steel chassis,the net force is strong,durable nature configuration tires no need to change
- Imported electric control system,over current,under voltage protection, increase the chassis,dustbin volume is bigger
- Umanized seat design,comfotal distance is adjustable,suitable for different shape medical personnel operation

品 牌 Brand	Huizelift
全自动带洒水扫地机 Electric battery Outdoor push Sweeper	PD-S373
货 号 Item number	13.00004
清扫宽度 Sweeping paths (mm)	1900
工作效率 Work efficiency (m²/h)	14000
爬坡能力 Climbing ability (%)	25
主刷长度 The length of the brush (mm)	700
动力源 Power supply (V)	48
连续工作时间 Continuous (h)	6-8
垃圾箱容量 The bin capacity (L)	150
水箱容量 Water tank capacity (L)	40
边刷直径 The sidebrush diameter (mm)	500
驱动电机功率 Drive power motor (W)	1500
作业电机功率（主刷 / 风机 / 边刷 / 振尘） Operating power motor(Brush dust/blower/side brush/fan vibration)	600/500/80*4/50W
转弯半径 Turning radius (mm)	1400
尺寸 (L*W*H) (mm)	2150*1900*2167
最大工作速度 Maximum working speed (km/h)	8
最大行驶速度 Maximum speed (km/h)	9
过滤面积 Filter area (m²)	5
净重 N.W (kg)	850