

ONE-PIECE TYPE BALL VALVE



MATERIAL : CF8, CF8M
WORKING PRESSURE : 1000WOG
SIZE : 1/4"~4"
CONNECTION : THREADED BSP

ONE PIECE FLANGED BALL VALVE




MATERIAL : CF8
WORKING PRESSURE : PN16
SIZE : 1/2"~8"
CONNECTION : WAFER TYPE

TWO-PIECE TYPE BALL VALVE



MATERIAL : CF8, CF8M
WORKING PRESSURE : 1000WOG
SIZE : 1/4"~4"
CONNECTION : THREADED BSP

FLANGE END 2PC BODY BALL VALVE

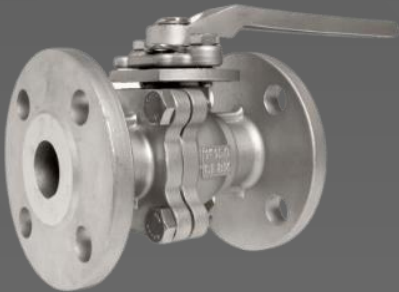

MATERIAL : WCB, CF8, CF8M
WORKING PRESSURE : 10BAR
SIZE : 1/2"~8"
CONNECTION : ANSI, JIS, DIN

THREE-PIECE TYPE BALL VALVE



MATERIAL : CF8, CF8M
WORKING PRESSURE : 1000WOG
SIZE : 1/4"~4"
CONNECTION : THREADED BSP, BUTT WELD

MOUNTING PAD BALL VALVE



MATERIAL : CF8, CF8M
WORKING PRESSURE : 1000WOG
SIZE : 1/4"~4"
CONNECTION : THREADED BSP, BUTT WELD

HIGH PERFORMANCE BALL VALVE



MATERIAL : CF8, CF8M
WORKING PRESSURE : 2000WOG
SIZE : 1/4"~4"
CONNECTION : THREADED BSP, BUTT WELD

FLANGE END 3PC BODY BALL VALVE



MATERIAL : CF8, CF8M
WORKING PRESSURE : 150LB
SIZE : 1/2"~4"
CONNECTION : FLANGED ANSI150LB

3 WAY BALL VALVE



MATERIAL : CF8, CF8M
WORKING PRESSURE : 80WOG
SIZE : 1/2"~4"
PORT : L OR T
CONNECTION : THREADED BSP,

JACKETED BALL VALVE FLANGED END



MATERIAL : CF8, CF8M
WORKING PRESSURE : PN16
SIZE : 1"~8"
CONNECTION : FLANGED PN16

PTFE LINE BALL VALVE



MATERIAL : CF8, CF8M
WORKING PRESSURE : PN16
SIZE : 1"~8"
CONNECTION : FLANGED PN16

BALL VALVE SEAL KITS



MATERIAL : R-PTFE

REPLACEMENT BALL



MATERIAL : CF8
WORKING PRESSURE : PN16
SIZE : 1/2"~8"
CONNECTION : WAFER TYPE

BRASS FLOAT VALVE



MATERIAL : BRASS
BALL MATERIAL : COPPER,
SIZE : 1/2"~4"
CONNECTION : THREADED BSP

SUS FLOAT VALVE



MATERIAL : CF8
BALL MATERIAL : SUS
SIZE : 1/2" ~ 4"
CONNECTION : THREADED BSP

WAFER TYPE BUTTERFLY VALVE



MATERIAL : DI/ SS
SEAT : NBR/ EPDM / VITON
DISC SS304/ SS316
SIZE : 2"~8"

WAFER TYPE BUTTERFLY VALVE



MATERIAL : SUS
SEAT : PTFE, VITON
DISC : SUS
SIZE : 2"~8"

PTFE LINED DISC BUTTERFLY VALVE



MATERIAL : WCB
SEAT : PTFE
DISC : WCB LINED PTFE
SIZE : 2"~8"

HP BUTTERFLY VALVE



MATERIAL : CF8
DISC : CF8
SEAT : METAL TO METAL
SIZE : 2"~8"
WORKING PRESSURE : PN16

WAFER TYPE DISCO CHECK VALVE



MATERIAL : CF8M
WORKING PRESSURE : PN16, PN40
SIZE : 1/2"~12"
CONNECTION : WAFLER TYPE

DUAL PLATE CHECK VALVE



MATERIAL : CAST IRON, SS304
DISC : CF8
SIZE : 1-1/2" ~ 12"
CONNECTION : WAFLER TYPE

SUPER THIN CHECK VALVE



MATERIAL : CF8M
WORKING PRESSURE : PN16
SIZE : 1-1/2" ~ 12"
CONNECTION : WAFLER TYPE

SWING CHECK VALVE



MATERIAL : WCB, CF8
WORKING PRESSURE : 10BAR
SIZE : 2" ~ 8"
CONNECTION : FLANGE END ANSI150, JIS10K

SWING CHECK VALVE



MATERIAL : BRASS, CF8, C8M
WORKING PRESSURE : 200WOG
SIZE : 1/4"~4"
CONNECTION : THREADED BSP

S-PATTERN GLOBE VALVE



MATERIAL : CAST IRON, CAST STEEL
WORKING PRESSURE : 16BAR, 40BAR
SIZE : 1/2" ~ 12"
CONNECTION : FLANGE END PN16, PN40

BELLOW SEAL GLOBE VALVE



MATERIAL : CAST IRON, CAST STEEL
WORKING PRESSURE : 16BAR, 40BAR
SIZE : 1/2"~12"
CONNECTION : FLANGE END PN16, PN40

SUS BELLOW SEAL GLOBE VALVE



MATERIAL : CF8,
TEMPERATURE : ≤350° C
PRESSURE : PN40
SIZE : 1/2" ~ 4"

WCB GLOBE VALVE



MATERIAL : WCB
WORKING PRESSURE : 10BAR
SIZE : 2" ~ 8"
CONNECTION : FLANGE END ANSI150

GLOBE VALVE PN16



MATERIAL : CAST IRON
WORKING PRESSURE : PN16
SIZE : 1/2"~2"
CONNECTION : SCREW END

CLASS800 GLOBE VALVE



MATERIAL : A105
WORKING PRESSURE : CLASS800
SIZE : 1/2" ~ 2"
CONNECTION : THREADED NPT, SOCKET WELD

FLANGE END ANSI150 GLOBE VALVE



MATERIAL : A105
WORKING PRESSURE : CLASS 800
SIZE : 1/2"~2"
CONNECTION : ANSI150, ANSI300

CLASS 1500 GLOBE VALVE



MATERIAL : A105, F304, F316
WORKING PRESSURE : CLASS1500
SIZE : 1/2" ~ 2"
CONNECTION : THREADED BSP, SOCKET WELD

CLASS 200 GLOBE VALVE



MATERIAL : SS304, SS316
WORKING PRESSURE : CLASS200
SIZE : 1/2" ~ 2"
CONNECTION : THREADED BSP

RISING STEM GATE VALVE



MATERIAL : CAST IRON
WORKING PRESSURE : 10BAR
SIZE : 2" ~ 12"
CONNECTION : FLANGED ANSI150 , JIS10K

GATE VALVE



MATERIAL : A105
WORKING PRESSURE : CLASS 800
SIZE : 1/2"~2"
CONNECTION : FLANGE END AN150LB

A105 GATE VALVE



MATERIAL : A105
WORKING PRESSURE : CLASS 800
SIZE : 1/2"~2"
CONNECTION : THREADED NPT, SOCKET WELD

WCB GATE VALVE



MATERIAL : WCB
TYPE : RISING STEM, API609
SIZE : 2"~12"
CONNECTION : FLANGED ANSI150LB

DIN NON-RISING GATE VALVE



MATERIAL : CAST IRON
TYPE : RESILIENT SEAT
SIZE : 2"~12"
CONNECTION : FLANGE END PN16

CLASS 200 GATE VALVE



MATERIAL : CF8, CF8M
WORKING PRESSURE : CLASS200
SIZE : 1/2"~2"
CONNECTION : THREADED BSP

SUS Y-STRAINER



MATERIAL : CF8, CF8M
WORKING PRESSURE : 800WOG
SIZE : 1/2"~4"
CONNECTION : THREADED BSP

FLANGED Y-STRAINER



MATERIAL : WCB, CF8, CF8M
WORKING PRESSURE : 10BAR
SIZE : 1-1/2" ~ 12"
CONNECTION : FLANGED ANSI, JIS, DIN

IRON Y-STRAINER



MATERIAL : CAST IRON
WORKING PRESSURE : 10 BAR
SIZE : 2" ~ 12"
CONNECTION : FLANGED ANSI, JIS, DIN

BALL FLOAT STEAM TRAP



MATERIAL : WCB
WORKING PRESSURE : 10 BAR
SIZE : 1/2"~2"
CONNECTION : THREADED BSP,

FLANGE BALL FLOAT STEAM TRAP



MATERIAL : WCB
WORKING PRESSURE : 10BAR, 40BAR
SIZE : 1/2"~2"
CONNECTION : FLANGED PN16, PN40

THERMODYNAMIC STEAM TRAP



MATERIAL : CAST IRON, WCB
WORKING PRESSURE : 10BAR
SIZE : 1/2"~2"
CONNECTION : THREADED BSP

SS THERMODYNAMIC STEM TRAP



MATERIAL : WCB, SS304
 WORKING PRESSURE : PN16
 SIZE : 1/2" ~ 2"
 CONNECTION : SCREW END

SS DOUBLE WINDOW SIGHT GLASS



MATERIAL : CF8
 WORKING PRESSURE : 10BAR
 SIZE : 1/2"~8"
 CONNECTION : FLANGE END PN16

PRESSURE CONTROL VALVE



MATERIAL : CAST STEEL
 WORKING PRESSURE : 10BAR
 SIZE : 2" ~ 6"
 CONNECTION : FLANGE END PN16

PNEUMATIC ACTUATOR BALL VALVE



MATERIAL : STAINLESS STEEL
 ACTUATOR : SINGLE/ DOUBLE ACTING
 SIZE : 1/2" ~ 4"
 CONNECTION : THREAD, FLANGED,
 WELD