




[www.dynapack.eu](http://www.dynapack.eu)


# PACKAGING

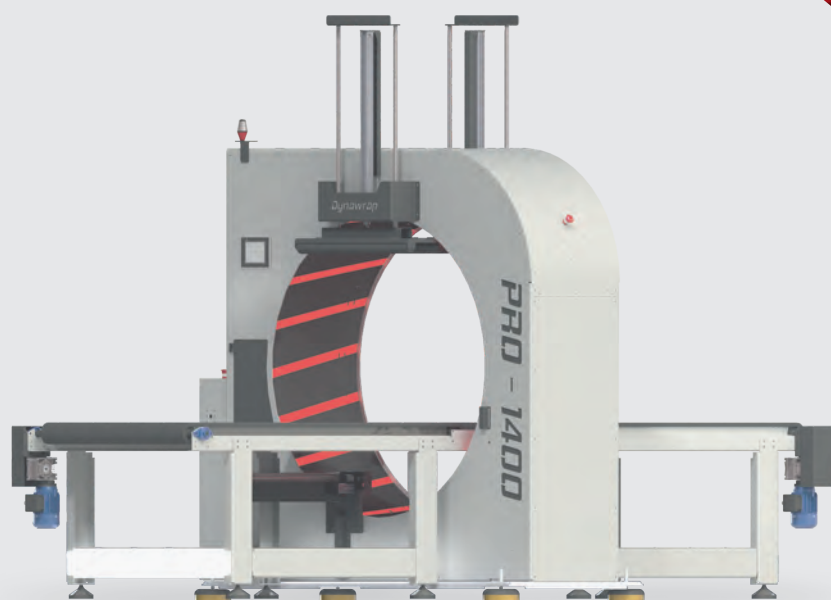

# JOY 450

"Lots to Love less to spend!"

## Standart Machine Includes:

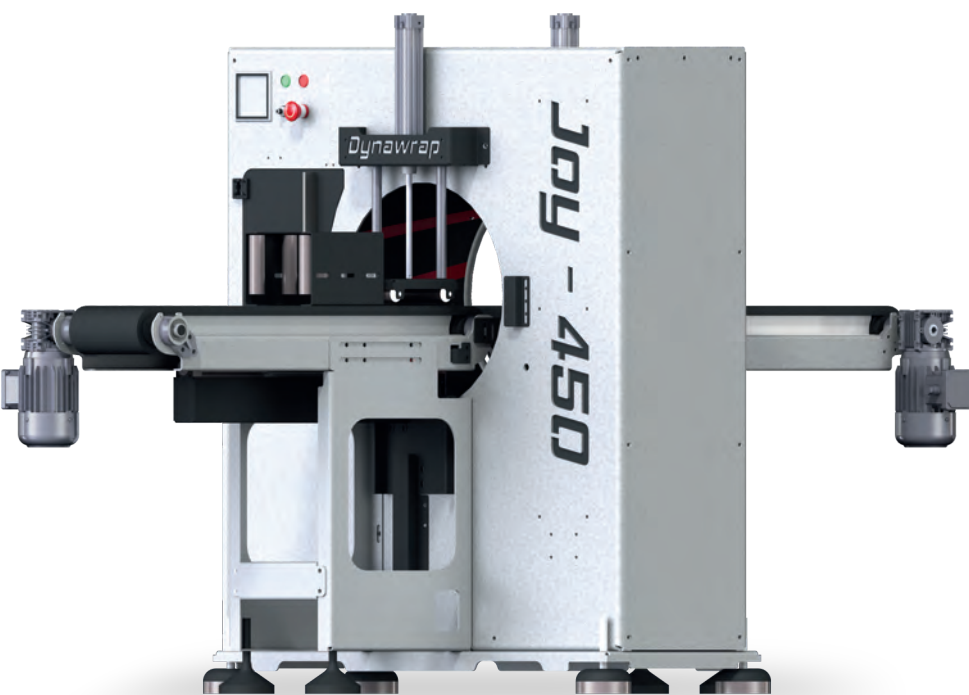

Stretch Tensioner

Automatic Top Presses

Automatic Cutting System

Motorised Belt Conveyors

### MACHINE TECHNICAL SPECIFICATIONS

|                                |                    |
|--------------------------------|--------------------|
| Net Passing Diameter (mm)      | 450                |
| Standart Dimensions (WxHxL)    | 1150x1300x2200     |
| Max. Rotational Velocity (rpm) | 80                 |
| Total Weight (kg)              | 320                |
| Installed Power (Kw)           | 1,5                |
| Power Supply Voltage (V)       | 230V 1Ph+N 50/60Hz |

### PRODUCT SIZE TO PACK

|                                    |                                        |
|------------------------------------|----------------------------------------|
| Max. Length (mm)                   | No Limit                               |
| Min Length (mm) <b>with Bridge</b> | 400                                    |
| Max Passing Dimensions (mm)        | Max W: 400 H: 150<br>W: 300 Max H: 220 |

### CONVEYOR BELT FEATURES

|                             |     |
|-----------------------------|-----|
| Conveyor Belt Length (mm)   | 950 |
| Conveyor Belt Width (mm)    | 190 |
| Max. Conveyor Speed (m/sec) | 12  |
| Max. Load Capacity (kg/m)   | 50  |
| Working Height (mm)         | 750 |

### STRETCH FILM FEATURES

|                                |                        |
|--------------------------------|------------------------|
| Max. Exterior Diameter (mm)    | 200                    |
| Reeel Core Diameter (mm)       | 76                     |
| Max. Exterior Width (mm)       | 170/250                |
| Recommended Thickness (micron) | 12, 15, 17, 23, 30, 35 |
| Max. Weight                    | 3,6 kg                 |

*\*125/170mm reels can also be used*

## CUSTOMISE YOUR MACHINE WITH:

7" Touch Panel

Wifi/Mobile Access

Barcode Program & Printer

Conveyor Options

Touch Series (Bubble/Foam Wrap)

Manual Side Press

Stretch Roture Warning System

Fence Protection



# JOY 1250

“Compact and Easy to Own!”

Standart Machine Includes:



## MACHINE TECHNICAL SPECIFICATIONS

|                                |                    |
|--------------------------------|--------------------|
| Net Passing Diameter (mm)      | 1260               |
| Standart Dimensions (WxHxL)    | 2030x2250x2200     |
| Max. Rotational Velocity (rpm) | 70                 |
| Total Weight (kg)              | 560                |
| Installed Power (Kw)           | 1,5                |
| Power Supply Voltage (V)       | 230V 1Ph+N 50/60Hz |

## PRODUCT SIZE TO PACK

|                                    |                                        |
|------------------------------------|----------------------------------------|
| Max. Length (mm)                   | No Limit                               |
| Min Length (mm) <b>with Bridge</b> | 400                                    |
| Max Passing Dimensions (mm)        | Max W: 1130 H: 200<br>W:750 Max H: 670 |

## CONVEYOR BELT FEATURES

|                             |         |
|-----------------------------|---------|
| Conveyor Belt Length (mm)   | 950     |
| Conveyor Belt Width (mm)    | 750     |
| Max. Conveyor Speed (m/sec) | 12      |
| Max. Load Capacity (kg/m)   | 90      |
| Working Height (mm)         | 720-880 |

## STRETCH FILM FEATURES

|                                |                        |
|--------------------------------|------------------------|
| Max. Exterior Diameter (mm)    | 200                    |
| Reeel Core Diameter (mm)       | 76                     |
| Max. Exterior Width (mm)       | 170/250                |
| Recommended Thickness (micron) | 12, 15, 17, 23, 30, 35 |
| Max. Weight                    | 3,6 kg                 |

\*125/170mm reels can also be used

## CUSTOMISE YOUR MACHINE WITH:






# JOY 1550

"Wrap Any Cabinet: Where Precision Meets Versatility!"

# Standard Machine Includes:

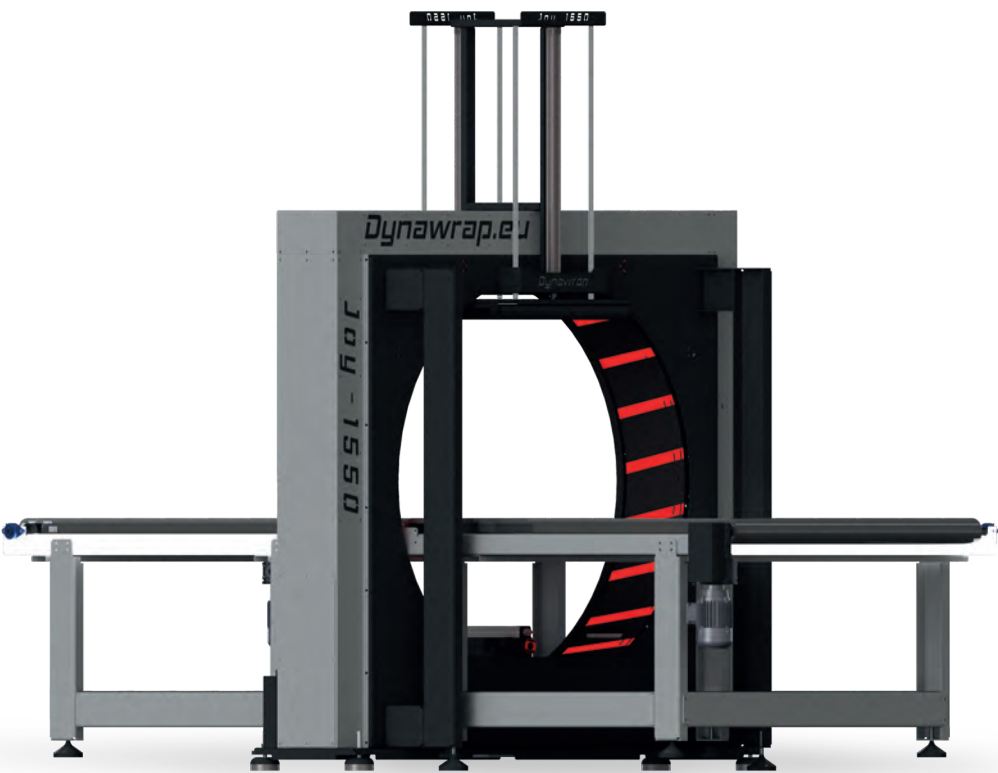

Stretch Tensioner

Automatic Top Presses

Automatic Cutting System

Motorised Belt Conveyors

## MACHINE TECHNICAL SPECIFICATIONS

|                                |                    |
|--------------------------------|--------------------|
| Net Passing Diameter (mm)      | 1550               |
| Standart Dimensions (WxHxL)    | 2200x2850x3750     |
| Max. Rotational Velocity (rpm) | 70                 |
| Total Weight (kg)              | 1120               |
| Installed Power (Kw)           | 2,25               |
| Power Supply Voltage (V)       | 230V 1Ph+N 50/60Hz |

## PRODUCT SIZE TO PACK

|                                    |                                        |
|------------------------------------|----------------------------------------|
| Max. Length (mm)                   | No Limit                               |
| Min Length (mm) <b>with Bridge</b> | 450                                    |
| Max Passing Dimensions (mm)        | Max W: 1420 H: 400<br>W:920 Max H: 870 |

## CONVEYOR BELT FEATURES

|                             |                          |
|-----------------------------|--------------------------|
| Conveyor Belt Length (mm)   | 1800                     |
| Conveyor Belt Width (mm)    | 900 (Std.) / 1000 (Opt.) |
| Max. Conveyor Speed (m/sec) | 12                       |
| Max. Load Capacity (kg/m)   | 90                       |
| Working Height (mm)         | 800-880                  |

## STRETCH FILM FEATURES

|                                |                        |
|--------------------------------|------------------------|
| Max. Exterior Diameter (mm)    | 200                    |
| Reeel Core Diameter (mm)       | 76                     |
| Max. Exterior Width (mm)       | 170/250                |
| Recommended Thickness (micron) | 12, 15, 17, 23, 30, 35 |
| Max. Weight                    | 3,6kg / 4,8kg          |

\*125/170mm reels can also be used

## CUSTOMISE YOUR MACHINE WITH:

7" Touch Panel

Wifi/Mobile Access

Barcode Program & Printer

Conveyor Options

Touch Series

Stretch Roture Warning System


Fence Protection



# PRO 600

“Pioneering Robustness at Lightning Speeds!”

# Standard Machine Includes:

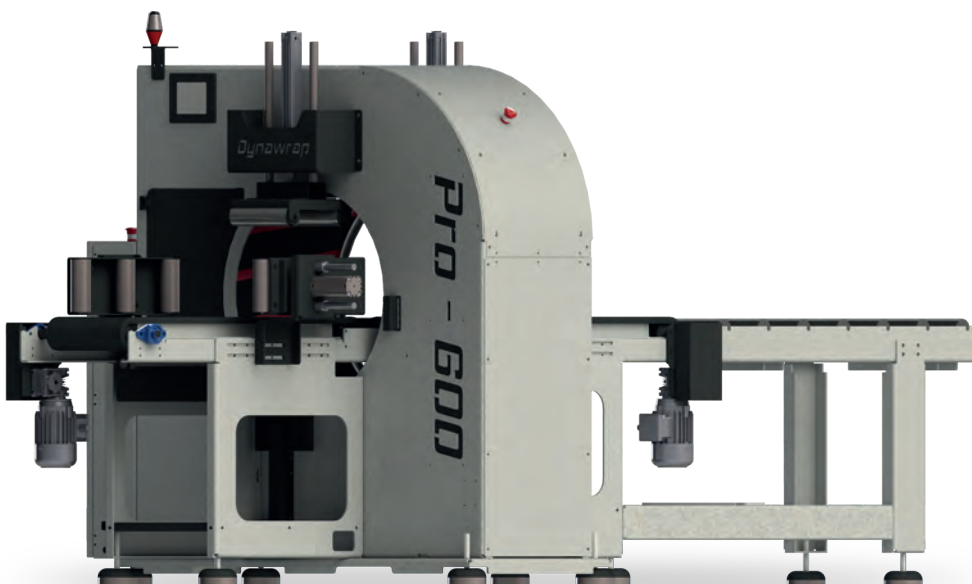

7" Touch Panel

Stretch Tensioner+CTS

Automatic Top Presses

Automatic Cutting System

Motorised Belt Conveyors

## MACHINE TECHNICAL SPECIFICATIONS

|                                      |                    |
|--------------------------------------|--------------------|
| Net Passing Diameter (mm)            | 600                |
| Standart Dimensions (W x H x L) (mm) | 1630x1500x2960     |
| Max. Rotational Velocity (rpm)       | 90                 |
| Total Weight (kg)                    | 560 kg             |
| Installed Total Power (kw)           | 1,5                |
| Power Supply Voltage (V)             | 400V 3Ph+N 50/60Hz |

## PRODUCT SIZE TO PACK

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Max. Length (mm)                   | No Limit                              |
| Min Length (mm) <b>with Bridge</b> | 600                                   |
| Max Passing Dimensions (mm)        | Max W: 500 H: 100<br>W:400 Max H: 300 |

## CONVEYOR BELT FEATURES

|                             |         |
|-----------------------------|---------|
| Conveyor Belt Length (mm)   | 1500    |
| Conveyor Belt Width (mm)    | 300     |
| Max. Conveyor Speed (m/sec) | 15      |
| Max. Load Capacity (kg/m)   | 60      |
| Working Height (mm)         | 800-850 |

## STRETCH FILM FEATURES

|                                |                        |
|--------------------------------|------------------------|
| Max. Exterior Diameter (mm)    | 210                    |
| Reeel Core Diameter (mm)       | 76                     |
| Max. Exterior Width (mm)       | 170/250                |
| Recommended Thickness (micron) | 12, 15, 17, 23, 30, 35 |
| Max. Weight                    | 4,2 kg / 5,6 kg        |

\*125/170mm reels can also be used

## CUSTOMISE YOUR MACHINE WITH:

Wifi/Mobile Access

Barcode Program & Printer

Conveyor Options

Touch Series  
(Bubble/Foam Wrap)

Automatic Side Guides

Stretch Roture  
Warning System


Fence Protection



## PRO 1100

"Power Moves!"

Standard Machine Includes:

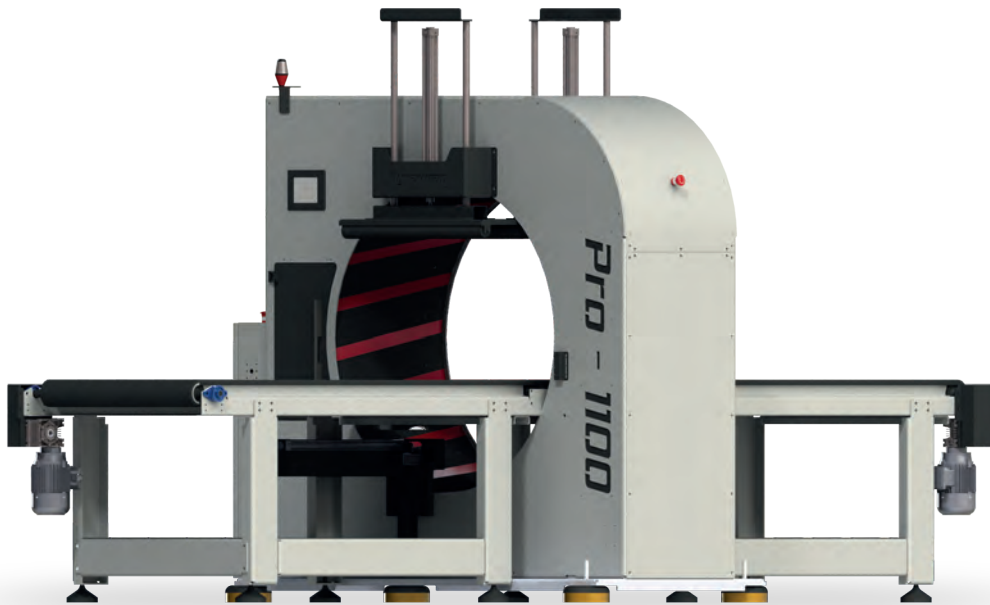

7'' Touch Panel



Stretch Tensioner+CTS



Automatic Top Presses



Automatic Cutting System



Motorised Belt Conveyors

### MACHINE TECHNICAL SPECIFICATIONS

|                                      |                    |
|--------------------------------------|--------------------|
| Net Passing Diameter (mm)            | 1100               |
| Standard Dimensions (W x H x L) (mm) | 1950x2100x4000     |
| Max. Rotational Velocity (rpm)       | 90                 |
| Total Weight (kg)                    | 820                |
| Installed Total Power (kw)           | 2,25               |
| Power Supply Voltage (V)             | 400V 3Ph+N 50/60Hz |

### PRODUCT SIZE TO PACK

|                                                 |                                        |
|-------------------------------------------------|----------------------------------------|
| Max. Length (mm)                                | No Limit                               |
| Min Length (mm) <b>with Bridge (125mm Reel)</b> | 300                                    |
| Min Length (mm) <b>with Bridge (250mm Reel)</b> | 550                                    |
| Max Passing Dimensions (mm)                     | Max W: 980 H: 150<br>W: 700 Max H: 550 |

### CONVEYOR BELT FEATURES

|                             |         |
|-----------------------------|---------|
| Conveyor Belt Length (mm)   | 1800    |
| Conveyor Belt Width (mm)    | 750     |
| Max. Conveyor Speed (m/sec) | 12      |
| Max. Load Capacity (kg/m)   | 90      |
| Working Height (mm)         | 750-800 |

### STRETCH FILM FEATURES

|                                |                        |
|--------------------------------|------------------------|
| Max. Exterior Diameter (mm)    | 210                    |
| Reel Core Diameter (mm)        | 76                     |
| Max. Exterior Width (mm)       | 125* / 170 / 250       |
| Recommended Thickness (micron) | 12, 15, 17, 23, 30, 35 |
| Max. Weight                    | 2,8kg / 5,6kg          |

\*125mm Reel Machine. (Slim Type)

\*125/170mm reels can also be used

### CUSTOMISE YOUR MACHINE WITH:



Wifi/Mobile Access



Barcode Program  
& Printer



Conveyor Options



Touch Series



Stretch Roture  
Warning System




Fence Protection



# PRO 1400

“Where Versatility Meets Performance Excellence”

# Standard Machine Includes:

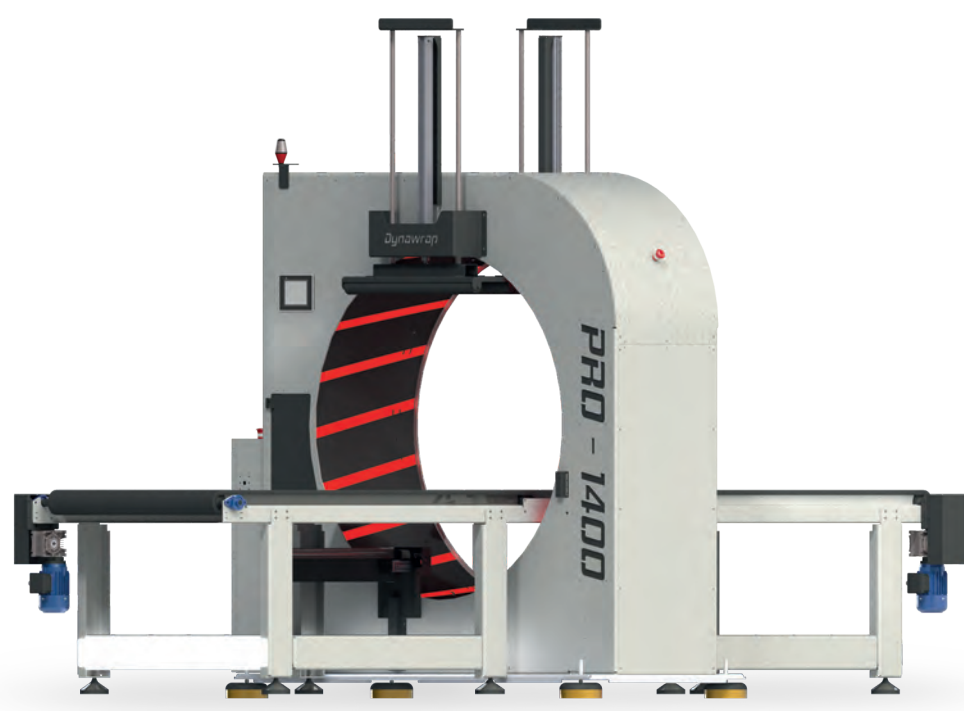



7" Touch Panel



Stretch Tensioner+CTS



Automatic Top Presses



Automatic Cutting System



Motorised Belt Conveyors

## MACHINE TECHNICAL SPECIFICATIONS

|                                      |                    |
|--------------------------------------|--------------------|
| Net Passing Diameter (mm)            | 1370               |
| Standard Dimensions (W x H x L) (mm) | 2100x2600x4000     |
| Max. Rotational Velocity (rpm)       | 75                 |
| Total Weight (kg)                    | 1020               |
| Installed Total Power (kw)           | 2.25               |
| Power Supply Voltage (V)             | 400V 3Ph+N 50/60Hz |

## PRODUCT SIZE TO PACK

|                                    |                                         |
|------------------------------------|-----------------------------------------|
| Max. Length (mm)                   | No Limit                                |
| Min Length (mm) <b>with Bridge</b> | 600                                     |
| Max Passing Dimensions (mm)        | Max W: 1290 H: 190<br>W: 800 Max H: 770 |

## CONVEYOR BELT FEATURES

|                             |                          |
|-----------------------------|--------------------------|
| Conveyor Belt Length (mm)   | 1800                     |
| Conveyor Belt Width (mm)    | 900 (Std.) / 1000 (Opt.) |
| Max. Conveyor Speed (m/sec) | 12                       |
| Max. Load Capacity (kg/m)   | 90                       |
| Working Height (mm)         | 750-850                  |

## STRETCH FILM FEATURES

|                                |                        |
|--------------------------------|------------------------|
| Max. Exterior Diameter (mm)    | 210                    |
| Reel Core Diameter (mm)        | 76                     |
| Max. Exterior Width (mm)       | 250                    |
| Recommended Thickness (micron) | 12, 15, 17, 23, 30, 35 |
| Max. Weight                    | 5,6kg                  |

\*125/170mm reels can also be used


## CUSTOMISE YOUR MACHINE WITH:



Wifi/Mobile Access



Barcode Program & Printer




Conveyor Options



Touch Series



Stretch Roture Warning System



Fence Protection



# PRO 1700

“Ready for Big Things!”

# Standart Machine Includes:



7" Touch Panel

Stretch Tensioner+CTS

Automatic Top Presses

Automatic Cutting System

Motorised Belt Conveyors

## MACHINE TECHNICAL SPECIFICATIONS

|                                      |                    |
|--------------------------------------|--------------------|
| Net Passing Diameter (mm)            | 1700               |
| Standart Dimensions (W x H x L) (mm) | 2470x2300x4000     |
| Max. Rotational Velocity (rpm)       | 55                 |
| Total Weight (kg)                    | 1480               |
| Installed Total Power (kw)           | 3,0                |
| Power Supply Voltage (V)             | 400V 3Ph+N 50/60Hz |

## PRODUCT SIZE TO PACK

|                                    |                                          |
|------------------------------------|------------------------------------------|
| Max. Length (mm)                   | No Limit                                 |
| Min Length (mm) <b>with Bridge</b> | 750                                      |
| Max Passing Dimensions (mm)        | Max W: 1580 H: 400<br>W: 1100 Max H: 950 |

## CONVEYOR BELT FEATURES

|                             |         |
|-----------------------------|---------|
| Conveyor Belt Length (mm)   | 1800    |
| Conveyor Belt Width (mm)    | 1300    |
| Max. Conveyor Speed (m/sec) | 12      |
| Max. Load Capacity (kg/m)   | 100     |
| Working Height (mm)         | 800-900 |

## STRETCH FILM FEATURES

|                                |                    |
|--------------------------------|--------------------|
| Max. Exterior Diameter (mm)    | 230                |
| Reeel Core Diameter (mm)       | 76                 |
| Max. Exterior Width (mm)       | 250                |
| Recommended Thickness (micron) | 15, 17, 23, 30, 35 |
| Max. Weight                    | 6,5kg              |

*\*125/170mm reels can also be used*

## CUSTOMISE YOUR MACHINE WITH:

Wifi/Mobile Access

Barcode Program & Printer

Conveyor Options

Touch Series  
(Bubble/Foam Wrap)

Stretch Roture  
Warning System


Fence Protection



# PRO 2200

“Where Size Meets Power!”

Standart Machine Includes:

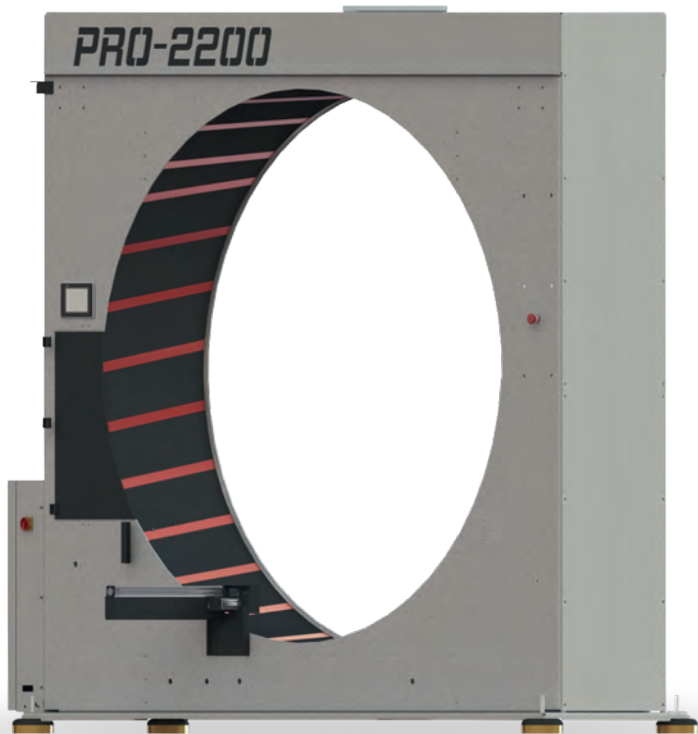

## MACHINE TECHNICAL SPECIFICATIONS

|                                      |                    |
|--------------------------------------|--------------------|
| Net Passing Diameter (mm)            | 2170               |
| Standart Dimensions (W x H x L) (mm) | 3200x2850x2100     |
| Max. Rotational Velocity (rpm)       | 55                 |
| Total Weight (kg)                    | 2800               |
| Installed Total Power (kw)           | 3,0                |
| Power Supply Voltage (V)             | 400V 3Ph+N 50/60Hz |

## PRODUCT SIZE TO PACK

|                                    |                     |
|------------------------------------|---------------------|
| Max. Length (mm)                   | No Limit            |
| Min Length (mm) <b>with Bridge</b> | 750                 |
| Max Passing Dimensions (mm)        | Max W: 1500 H: 1200 |

## CONVEYOR BELT FEATURES

|                           |              |
|---------------------------|--------------|
| Conveyor Belt Length (mm) | Customizable |
| Conveyor Belt Width (mm)  | Customizable |
| Max. Load Capacity (kg/m) | Customizable |
| Working Height (mm)       | 850-950      |

## STRETCH FILM FEATURES

|                                |                |
|--------------------------------|----------------|
| Max. Exterior Diameter (mm)    | 235            |
| Reeel Core Diameter (mm)       | 76             |
| Max. Exterior Width (mm)       | 250/500        |
| Recommended Thickness (micron) | 17, 23, 30, 35 |
| Max. Weight                    | 8 kg / 15 kg   |

*\*250/500 mm reels can also be used.*

## CUSTOMISE YOUR MACHINE WITH:



Wifi/Mobile Access



Barcode Program  
& Printer



Conveyor Options



Stretch Roture  
Warning System




Fence Protection



## PRO 1100W “Foam to Bubble, Total Versatility in Every Wrap!”

### Standard Machine Includes:

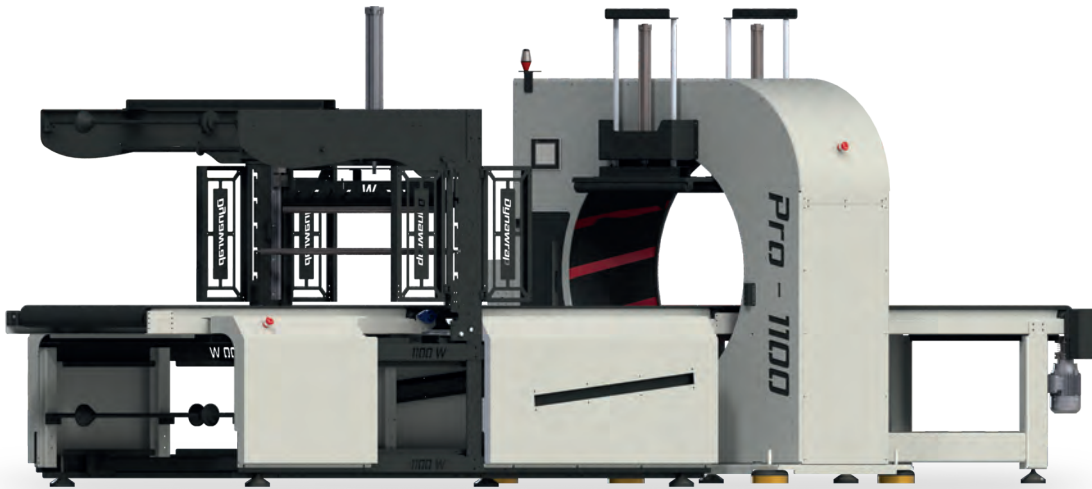

#### MACHINE TECHNICAL SPECIFICATIONS

|                                      |                    |
|--------------------------------------|--------------------|
| Net Passing Diameter (mm)            | 1100               |
| Standard Dimensions (W x H x L) (mm) | 1950x2100x6000     |
| Max. Rotational Velocity (rpm)       | 90                 |
| Total Weight (kg)                    | 1320               |
| Installed Total Power (kw)           | 3,3                |
| Power Supply Voltage (V)             | 400V 3Ph+N 50/60Hz |

#### PRODUCT SIZE TO PACK

|                                    |                                        |
|------------------------------------|----------------------------------------|
| Max. Length (mm)                   | No Limit                               |
| Min Length (mm) <b>with Bridge</b> | 550                                    |
| Max Passing Dimensions (mm)        | Max W: 980 H: 150<br>W: 700 Max H: 550 |

#### AIR BUBBLE FILM

|                                  |                                                |
|----------------------------------|------------------------------------------------|
| Max. Film Width (mm)             | 950                                            |
| Max. Diameter (mm)               | 650                                            |
| Core Diameter (mm)               | 20-76                                          |
| Welding Temperature (°C) Digital | 60-180                                         |
| Materials Confirmed              | PE Film, Foam, PE Air Bubble, PVC, Shrink Film |

#### CONVEYOR BELT FEATURES

|                             |                |
|-----------------------------|----------------|
| Conveyor Belt Length (mm)   | 1800/1800/1800 |
| Conveyor Belt Width (mm)    | 750            |
| Max. Conveyor Speed (m/sec) | 12             |
| Max. Load Capacity (kg/m)   | 90             |
| Working Height (mm)         | 750-800        |

#### STRETCH FILM FEATURES

|                                |                        |
|--------------------------------|------------------------|
| Max. Exterior Diameter (mm)    | 220                    |
| Reel Core Diameter (mm)        | 76                     |
| Max. Exterior Width (mm)       | 250                    |
| Recommended Thickness (micron) | 12, 15, 17, 23, 30, 35 |
| Max. Weight                    | 5,6kg                  |

\*125/170mm reels can also be used




7" Touch Panel



Stretch Tensioner+CTS



Automatic Top Presses



Automatic Cutting System



Motorised Belt Conveyors

#### CUSTOMISE YOUR MACHINE WITH:



Wifi/Mobile Access




Barcode Program & Printer



Conveyor Options



Stretch Roture Warning System



Fence Protection



## PRO 1400W “Foam to Bubble, Total Versatility in Every Wrap!”

## Standard Machine Includes:



### MACHINE TECHNICAL SPECIFICATIONS

|                                      |                    |
|--------------------------------------|--------------------|
| Net Passing Diameter (mm)            | 1370               |
| Standard Dimensions (W x H x L) (mm) | 2100x2600x6000     |
| Max. Rotational Velocity (rpm)       | 75                 |
| Total Weight (kg)                    | 1630               |
| Installed Total Power (kw)           | 3,7                |
| Power Supply Voltage (V)             | 400V 3Ph+N 50/60Hz |

### PRODUCT SIZE TO PACK

|                                    |                                         |
|------------------------------------|-----------------------------------------|
| Max. Length (mm)                   | No Limit                                |
| Min Length (mm) <b>with Bridge</b> | 600                                     |
| Max Passing Dimensions (mm)        | Max W: 1290 H: 190<br>W: 800 Max H: 750 |

### AIR BUBBLE FILM

|                                  |                                                |
|----------------------------------|------------------------------------------------|
| Max. Film Width (mm)             | 1350                                           |
| Max. Diameter (mm)               | 650                                            |
| Core Diameter (mm)               | 20-76                                          |
| Welding Temperature (°C) Digital | 60-180                                         |
| Materials Confirmed              | PE Film, Foam, PE Air Bubble, PVC, Shrink Film |

### CONVEYOR BELT FEATURES

|                             |                         |
|-----------------------------|-------------------------|
| Conveyor Belt Length (mm)   | 1800/1800/1800          |
| Conveyor Belt Width (mm)    | 900 (Std.) /1000 (Opt.) |
| Max. Conveyor Speed (m/sec) | 12                      |
| Max. Load Capacity (kg/m)   | 90                      |
| Working Height (mm)         | 750-800                 |

### STRETCH FILM FEATURES

|                                |                        |
|--------------------------------|------------------------|
| Max. Exterior Diameter (mm)    | 210                    |
| Reel Core Diameter (mm)        | 76                     |
| Max. Exterior Width (mm)       | 250                    |
| Recommended Thickness (micron) | 12, 15, 17, 23, 30, 35 |
| Max. Weight                    | 5,6kg                  |

\*125/170mm reels can also be used




7" Touch Panel



Stretch Tensioner+CTS



Automatic Top Presses



Automatic Cutting System



Motorised Belt Conveyors

## CUSTOMISE YOUR MACHINE WITH:



Wifi/Mobile Access




Barcode Program & Printer



Conveyor Options



Stretch Roture Warning System



Fence Protection



**PRO 1700W**
“Foam to Bubble, Total Versatility in Every Wrap!”

**Standard Machine Includes:**



7" Touch Panel

Stretch Tensioner+CTS

Automatic Top Presses

Automatic Cutting System

Motorised Belt Conveyors

**MACHINE TECHNICAL SPECIFICATIONS**

|                                      |                    |
|--------------------------------------|--------------------|
| Net Passing Diameter (mm)            | 1700               |
| Standart Dimensions (W x H x L) (mm) | 2470x2300x6640     |
| Max. Rotational Velocity (rpm)       | 55                 |
| Total Weight (kg)                    | 2300               |
| Installed Total Power (kw)           | 4,7                |
| Power Supply Voltage (V)             | 400V 3Ph+N 50/60Hz |

**PRODUCT SIZE TO PACK**

|                                    |                                          |
|------------------------------------|------------------------------------------|
| Max. Length (mm)                   | No Limit                                 |
| Min Length (mm) <b>with Bridge</b> | 750                                      |
| Max Passing Dimensions (mm)        | Max W: 1580 H: 400<br>W: 1100 Max H: 950 |

**AIR BUBBLE FILM**

|                                  |                                                |
|----------------------------------|------------------------------------------------|
| Max. Fim Width (mm)              | 1600                                           |
| Max. Diameter (mm)               | 650                                            |
| Core Diameter (mm)               | 20-76                                          |
| Welding Temperature (°C) Digital | 60-180                                         |
| Materials Confirmed              | PE Film, Foam, PE Air Bubble, PVC, Shrink Film |

**CONVEYOR BELT FEATURES**

|                             |                |
|-----------------------------|----------------|
| Conveyor Belt Length (mm)   | 1800/2400/1800 |
| Conveyor Belt Width (mm)    | 1300           |
| Max. Conveyor Speed (m/sec) | 12             |
| Max. Load Capacity (kg/m)   | 90             |
| Working Height (mm)         | 800-900        |

**STRETCH FILM FEATURES**

|                                |                        |
|--------------------------------|------------------------|
| Max. Exterior Diameter (mm)    | 220                    |
| Reeel Core Diameter (mm)       | 76                     |
| Max. Exterior Width (mm)       | 250                    |
| Recommended Thickness (micron) | 12, 15, 17, 23, 30, 35 |
| Max. Weight                    | 6,3kg                  |

*\*125/170mm reels can also be used*

**CUSTOMISE YOUR MACHINE WITH:**

Wifi/Mobile Access

Barcode Program & Printer

Conveyor Options

Stretch Roture Warning System

Fence Protection



## LIFT


"Improve Worker Productivity"




### KEY FEATURES

|                             |              |
|-----------------------------|--------------|
| Lowered Height              | 115 mm       |
| Raised Height               | 900 mm       |
| Capacity                    | 1000 kg      |
| Power                       | 0,75 Kw      |
| Pressure                    | 250 Bar MAX. |
| Hand Pallet Truck Accesible |              |

## LIFT U 1000

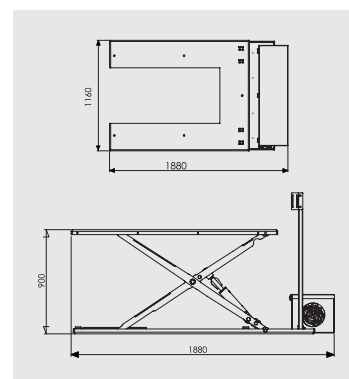


## LIFT E 1000

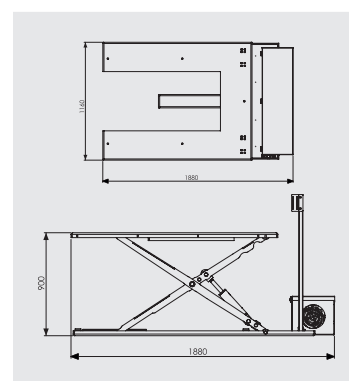

## REWINDER

"The Ultimate Rewinder for Economical Film Production!"

## DYNAPWRAP REWINDER

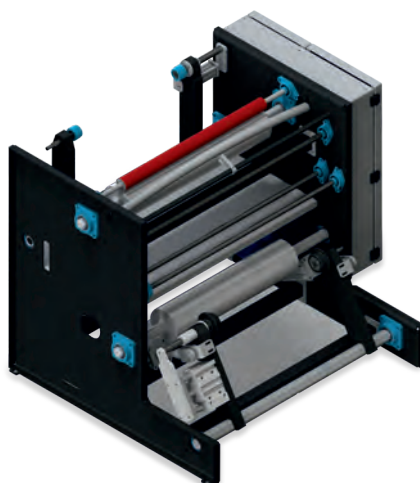

Stretch Your Savings



## RACK

"Smart Design Fits Everywhere"

VR Series



DR/DRX Series



Expandable



Adjustable



Space Saving

### AVAILABLE STANDARD MODELS

|                          | DR 10         | DR 12         | DRX 12        | DR 15        | VR 20         | VR 20 M       |
|--------------------------|---------------|---------------|---------------|--------------|---------------|---------------|
| <b>SHELVES</b>           | 10            | 12            | 12            | 15           | 20            | 20            |
| <b>(X) SHELF SPACING</b> | 125 mm useful | 115 mm useful | 100 mm useful | 60 mm useful | 125 mm useful | 125 mm useful |
| <b>(Y) Min.</b>          | 320 mm        | 300 mm        | 320 mm        | 320 mm       | 300 mm        | 1750 mm       |
| <b>(Y) Max.</b>          | 1250 mm       | 1250 mm       | 1250 mm       | 1250 mm      | 1250 mm       | 2300 mm       |
| <b>CAPACITY</b>          | 50 kg/ shelf  | 50 kg/ shelf  | 50 kg/ shelf  | 50 kg/ shelf | 25 kg/ shelf  | 25 kg/ shelf  |


"TRUE WORKHORSE FOR ANY CABINET SHOP"




## OPTIONS

## CONVEYOR SOLUTIONS


Heavy Type Conveyors (4 mm)

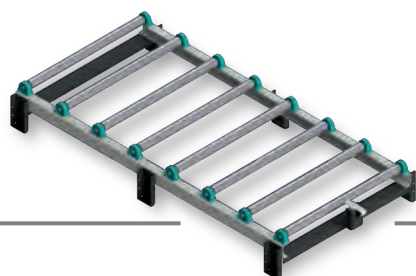

Free Roller Conveyor  
Pro Series 1400

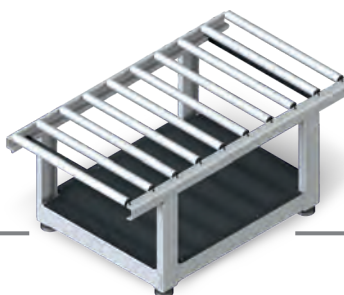

Roller Transport Turntable

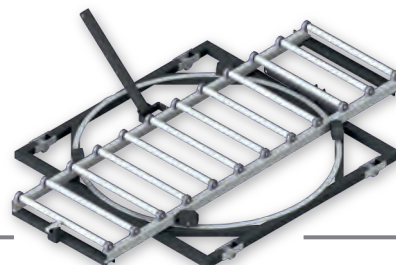


Roller Conveyor with  
Side Forklift Entrance




Free Roller Conveyor  
Joy Series 450




Tilting Conveyor

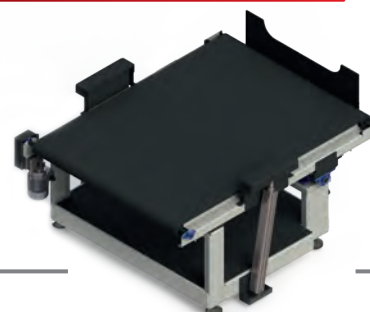

Motorised Belt Conveyor  
with Forklift + Lifting

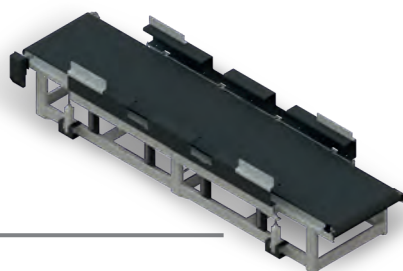

Motorised Roller Conveyor  
with Automatic Positioning

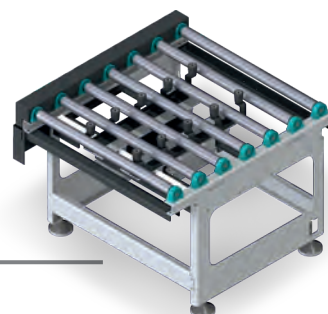

Motorised Coated  
Roller Conveyor

