


Installation Instructions

These instructions will show you how to assemble and install the ceiling fixture for your mobile. The ceiling fixture is designed to hold your mobile firmly and at the exact height you want it to hang while concealing extra line. I assume here that you are hanging your mobile from a drywall ceiling that requires an anchor. If you are able to hang your mobile from solid material like a beam, you can ignore the anchor, though I recommend that you still drill a pilot hole for the screw.

Included Hardware

Your mobiles comes with the following hardware:

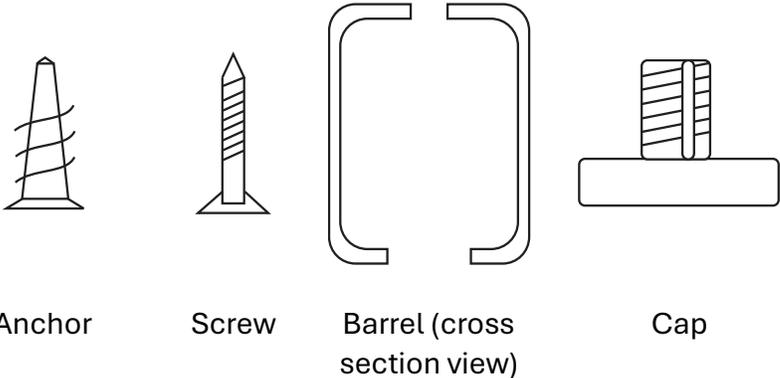

Anchor


Screw

Barrel (cross section view)


Cap

Instructions


1. Locate the correct placement for your mobile. Ensure that you have plenty of space for it to revolve freely. Drill an approximately 3mm (1/8in) pilot hole in the ceiling. Screw the anchor into the hole with a screwdriver.

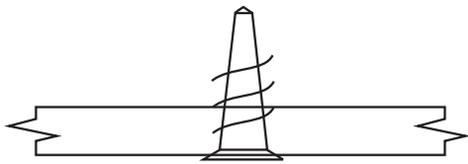


2. Pass the screw through the larger hole in the barrel and then through the smaller hole.

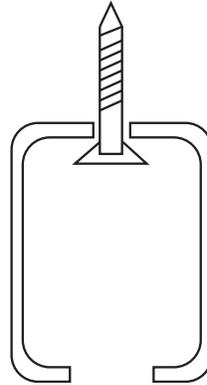


3. Using the larger hole to access the screw with a screwdriver, drive the screw into the anchor.

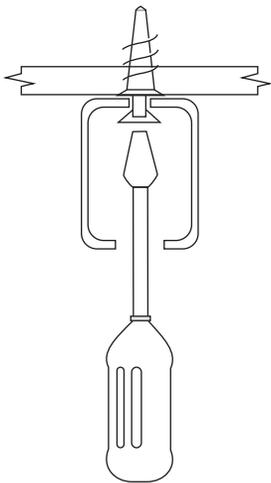

4. Thread the line up through the hole in the cap and extend it through the slit in the bolt.

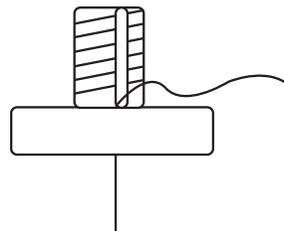

5. Determine how much line you need, and wrap the excess line around the split bolt. Tuck the end into the slit. NOTE: if you use the entire length of the line, tie a knot around the split bolt to secure it.

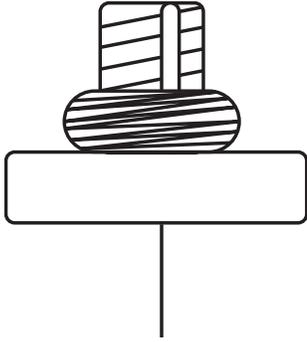

6. Screw the cap into the barrel.

