


# CANDLE POLE V2

Outdoor Type Decorative Lighting Poles

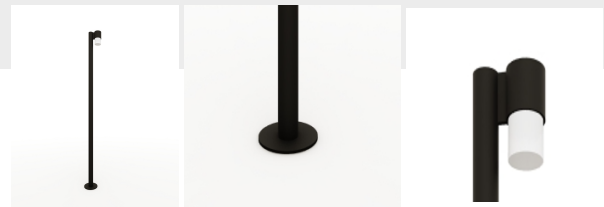

**The CANDLE's soft light creates strikingly beautiful light patterns and reveals stylistic finesse, which bewitches both owner and spectator. Thanks to CANDLE, areas can tell stories.**

This almost magic effect is due to a very pragmatic approach, namely that extraordinary performance creates extraordinary effects. Its Contemporary design is perfect for enhancing residential and urban areas featuring a modern,

Contemporary design. It creates a direct light beam, thanks to its monodirectional optics, able to enhance a precise area or subject, without glare.

CANDLE have options with power LED and LED Bulbs. Opal and Opaque diffuser is giving elegant design options.

## Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

UV Resistant PMMA Diffuser

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

## Key Advantages

- Modern decorative design
- Can be easily integrated to many designs
- Economic and tneicife
- Easy installation
- High performance LED
- High corrosion resistance
- High lumen output
- ANTIGLARE LUMINAIRE

## Applications



Exterior



Facade




Architectural



Ancient

# CANDLE POLE V2

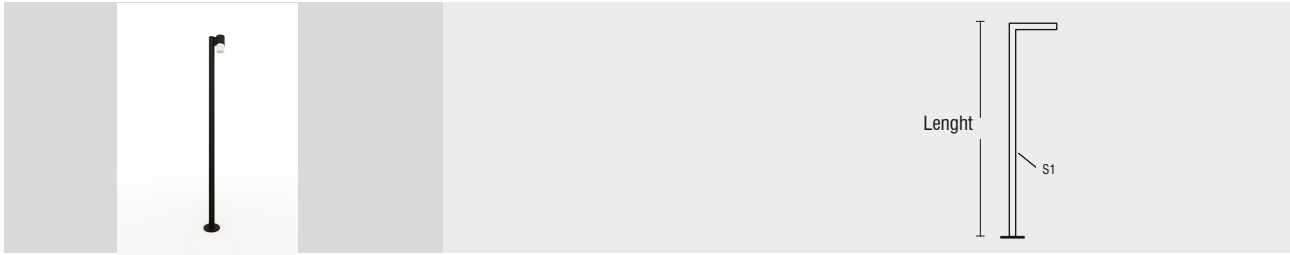


## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	120°
Light Color	4000K
Body Color	9016 White
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	1.20 kg
Ambient Temperature	-30°C / +60°C


## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years
Glass	Extra Clear
Diffuser	Transparent & Opal & Opac


## Light Colors



## Body Colors Options

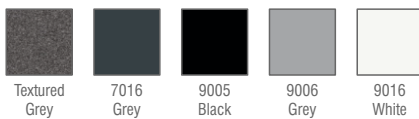

## Beam Angle Options

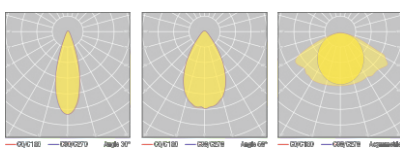

## Ordering Details

Product Code	Power	Light Color	Lenght	Lumen
CANDLEPOLE.8.AC.N.4.1500.7016	8W	4000K	1500	960
CANDLEPOLE.10.AC.N.4.2000.7016	10W	4000K	2000	1200
CANDLEPOLE.15.AC.N.4.2500.7016	15W	4000K	2500	1800
CANDLEPOLE..20.AC.N.4.3000.7016	20W	4000K	3000	2400
CANDLEPOLE..20.AC.N.4.4000.7016	20W	4000K	4000	2200
CANDLEPOLE..20.AC.N.4.5000.7016	20W	4000K	5000	2100

\* For different options, please contact our team.

## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX