



BITZER Output data

Created on : 28.11.2018 20:06:57



## Table of content

Project survey.....	3
Selection: Semi-hermetic Reciprocating Compressors.....	4
Technical Data: 4PES-15Y.....	5
Information: Semi-hermetic Reciprocating Compressors.....	6



## Project survey

### ***Selected compressors***

Semi-hermetic Reciprocating Compressors


1x 4PES-15Y



## Selection: Semi-hermetic Reciprocating Compressors

### Input Values

Compressor model	4PES-15Y
Mode	Refrigeration and Air conditioning
Refrigerant	R134a
Reference temperature	Dew point temp.
Evaporating SST	20,00 °F
Condensing SDT	110,0 °F
Liq. subc. (in condenser)	15,00 °F
Suction gas temperature	65,0 °F
Operating mode	Auto
Power supply	460V-3-60Hz UL
Capacity Control	100%
Useful superheat	100%

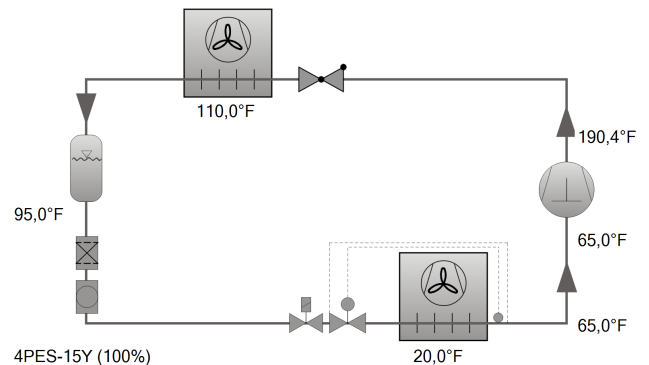


### Result

Compressor	<b>4PES-15Y-2NU</b>
Capacity steps	100%
Cooling capacity	73,5 kBtu/h
Cooling capacity *	68,0 kBtu/h
Evaporator capacity	73,5 kBtu/h
Power input	7,04 kW
Current (460V)	13,25 A
Voltage range	440-480V
Condenser Capacity	97,6 kBtu/h
COP/EER	10,44
COP/EER *	9,65
Mass flow	1025 lb/h
Operating mode	Standard
Discharge gas temp. w/o cooling	190,4 °F

Tentative Data.

\*with 65°F suction gas temperature, 0°F liquid subcooling


### Application Limits 100% 4PES-15

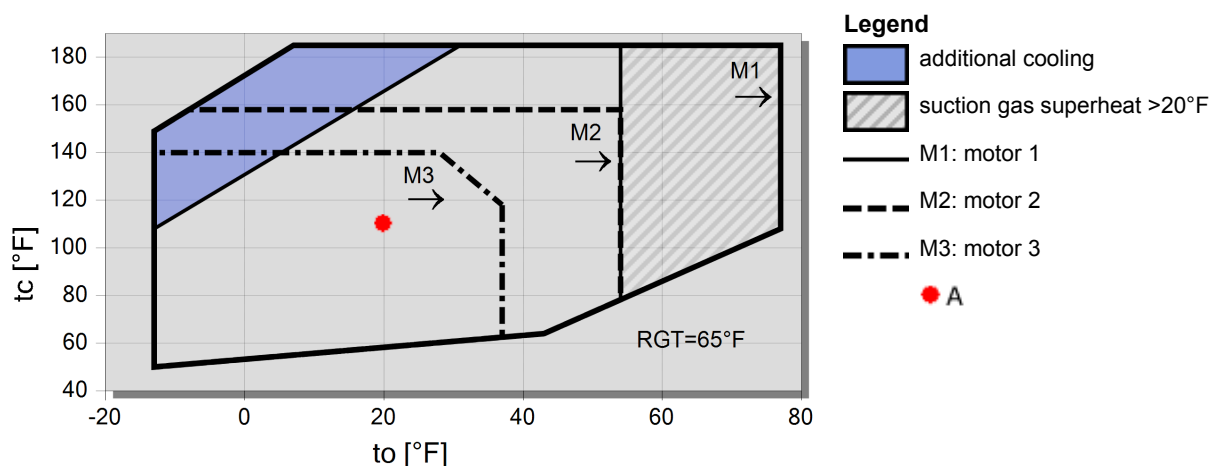



## Technical Data: 4PES-15Y

### Dimensions and Connections

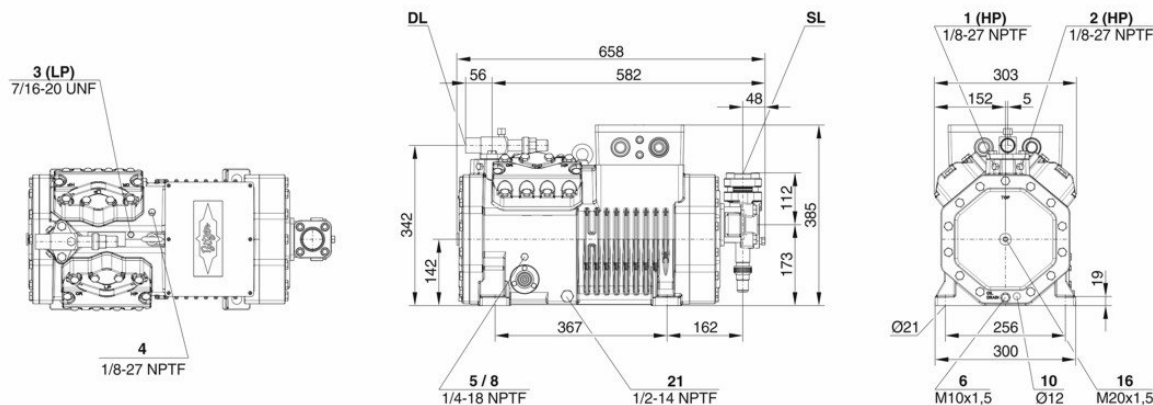

### Technical Data

#### Technical Data

Displacement (1450 RPM 50Hz)	1712.8 CFH
Displacement (1750 RPM 60Hz)	2067.1 CFH
No. of cylinder x bore x stroke	4 x 2.56 inch x 1.65 inch
Weight	313 lb
Max. pressure (LP/HP)	275 / 464 psi
Connection suction line	42 mm - 1 5/8"
Connection discharge line	28 mm - 1 1/8"
Oil type R134a/R407C/R404A/R507A/R407A/R407F	BSE32(Standard) / R134a tc>155°F: BSE55 (Option)
Oil type R22 (R12/R502)	B5.2(Option)

#### Motor data

Motor version	1
Motor voltage (more on request)	440-480V Y-3-60Hz UL
Max operating current	28.2 A
Winding ratio	50/50
Starting current (Rotor locked)	147.0 A
Max. Power input	19.3 kW

#### Extent of delivery (Standard)

Motor protection	SE-B1
Enclosure class	IP66
Vibration dampers	Standard
Oil charge	91.5 fl oz

#### Available Options

Discharge gas temperature sensor	Option
Start unloading	Option
Capacity control	100-50% (Option)
Capacity Control - infinite	100-10% (Option)
Additional fan	Option
Oil service valve	Option
Crankcase heater	0..140 W PTC (Option)
Oil level monitoring	OLC-K1 (Option)

#### Sound measurement

Sound power level (+5°C / 50°C)	77,5 dB(A) @60Hz
Sound power level (-10°C / 45°C)	78,8 dB(A) @60Hz
Sound power level (-35°C / 40°C)	82,4 dB(A) @60Hz
Sound pressure level @ 1m (+5°C / 50°C)	69,5 dB(A) @60Hz
Sound pressure level @ 1m (-10°C / 45°C)	70,8 dB(A) @60Hz
Sound pressure level @ 1m (-35°C / 40°C)	74,4 dB(A) @60Hz
Sound power level (+5°C / 50°C) R134a	75,5 dB(A) @50Hz
Sound power level (-10°C / 45°C) R134a	76,8 dB(A) @60Hz
Sound pressure level @ 1m (+5°C / 50°C) R134a	67,5 dB(A) @50Hz
Sound pressure level @ 1m (-10°C / 45°C) R134a	68,8 dB(A) @60Hz



## Semi-hermetic Reciprocating Compressors

**Motor 1** = e.g. 4TES-12 with 12 "HP", primary for air-conditioning (e.g. R22, R407C) and air-conditioning with R134a at high ambient temperatures.

**Motor 2** = e.g. 4TES-9 with 8 "HP", universal Motor for medium and low temperature application (e.g. R404A, R507A, R407A, R407F) and air-conditioning with R134a

**Motor 3** = e.g. 4TES-8, for medium temperature applications and R134a

For more information concerning the application range use the "Limits" button.

### Operation modes 4VES-7 to 6FE-44 and 44JE-30 to 66FE-88 with R407F/R407A/R22

CIC = liquid injection with low temperature application, suction gas cooled motor.

### ASERCOM certified performance data

The Association of European Refrigeration Component Manufacturers has implemented a procedure of certifying performance data. The high standard of these certifications is assured by:

- \* plausibility tests of the data performed by experts.
- \* regular measurements at independent institutes.

These high efforts result in the fact that only a limited number of compressors can be submitted. Due to this not all BITZER compressors are certified until now. Performance data of compressors which fulfil the strict requirements may carry the label "ASERCOM certified". In this software you will find the label at the respective compressors on the right side below the field "result" or in the print out of the performance data. All certified compressors and further information are listed on the homepage of ASERCOM.

### Condensing capacity

The condensing capacity can be calculated with or without heat rejection. This option can be set in the menu Program ☐ Options. The heat rejection is constantly 5 % of the power consumption. The condensing capacity is to be found in the line Condensing cap. (with HR) resp. Condensing capacity.

### Data for sound emission

Data based on 50 HZ application (IP-units 60 Hz) and R404A if not declared.

Sound pressure level: values based on free field area conditions with hemispherical sound emission in 1 meter distance.

### General remarks regarding sound data

Listed sound data were measured under testing conditions in our laboratory. For this purpose the free-standing test sample is mounted on a solid foundation plate and the pipework is connected vibration-free to the largest extent possible. Suction and discharge lines are fixed in a flexible configuration, such that a transmission of vibrations to the environment can be largely excluded. In real installations considerable differences might be observed, compared to the measurements in the laboratory. The airborne sound emitted by the compressor can be reflected from surfaces of the system and this may increase the airborne sound level measured close to the compressor. Vibrations caused by the compressor are also transferred to the system by the compressor feet and piping depending on the damping ratio of the fixings. Thus, the vibrations can induce other components to such an extent that these components contribute to an increase in airborne sound emission. If required, the transfer of vibrations to the system can be minimized by suitable fixing and damping elements.

### Legend of connection positions according to "Dimensions":

- 1 High pressure connection (HP)
- 2 Connection for discharge gas temperature sensor (HP) (for 4VE(S)-6Y .. 4NE(S)-20(Y) connection for CIC sensor as alternative)
- 3 Low pressure connection (LP)
- 4 CIC system: injection nozzle (LP)
- 4b Connection for CIC sensor
- 4c Connection for CIC sensor (MP / operation with liquid subcooler)
- 5 Oil fill plug
- 6 Oil drain
- 7 Oil filter (magnetic screw)
- 8 Oil return (oil separator)
- 8\* Oil return with NH3 and insoluble oil
- 9 Connection for oil and gas equalization (parallel operation)
- 9a Connection for gas equalization (parallel operation)
- 9b Connection for oil equalization (parallel operation)
- 10 Oil heater connection
- 11 Oil pressure connection +
- 12 Oil pressure connection –
- 13 Cooling water connection
- 14 Intermediate pressure connection (MP)
- 15 Liquid injection (operation without liquid subcooler and with thermostatic expansion valve)
- 16 Connection for oil monitoring (opto-electrical oil monitoring "OLC-K1" or differential oil pressure switch "Delta-P11")



- 17 Refrigerant inlet at liquid subcooler
  - 18 Refrigerant outlet at liquid subcooler
  - 19 Clamp space
  - 20 Terminal plate
  - 21 Maintenance connection for oil valve
  - 22 Pressure relief valve to the atmosphere (discharge side)
  - 23 Pressure relief valve to the atmosphere (suction side)
  - 24 IQ MODULE
  - SL Suction gas line
  - DL Discharge gas line
- Dimensions can show tolerances according to EN ISO 13920-B.