



RENOVO®

SYNTHETIC PLASTER
THE PERFECT PERMANENT FINISH

Company Profile

- Damani Dyestuff Ltd founded in 1962
- One of India's largest specialty decorative coatings company since 1970
- Strong reputation for quality and service
- Over 56 years of industry presence
- Wide sales & service network across major Indian states
- Supported by advanced R&D and modern manufacturing facilities in Gujarat & Maharashtra
- Business Model – Supply & Application




About RENOVO

- Renovo is a premium exterior surface coating system designed to protect and beautify building exteriors while significantly reducing maintenance requirements.
- It consists of a high-performance synthetic plaster reinforced with synthetic fibres and petroleum-based polymers, manufactured by Damani Dyestuff Ltd.

Purpose


Renovo forms a durable protective skin over the building surface that enhances appearance while protecting the structure from weathering.

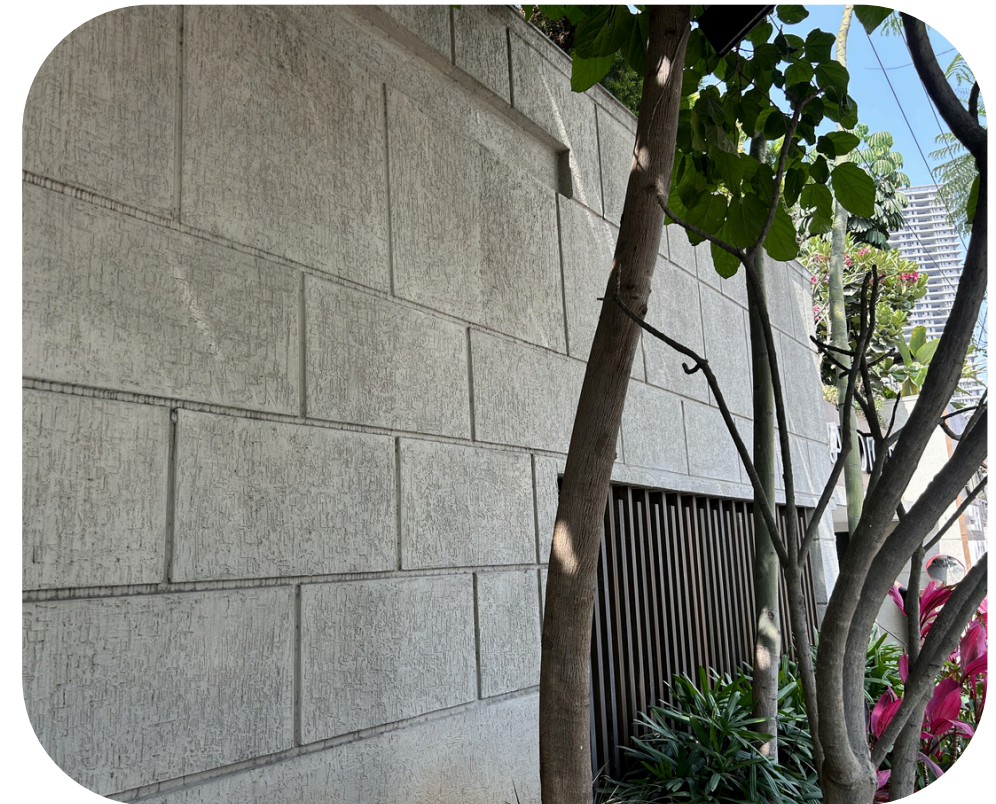

Application Procedure

Renovo is applied on cement plaster (mild key / wire-brush / sponge finish) or Mivan concrete surfaces in a three-coat system:

- Base Coat: One coat of Renovo Synthetic Plaster applied by trowel. Finished by a design trowel, roller or brush.
- Protective Layer: Two coats of Renovo chemical overcoat applied by brush/roller.
- Finish: Available in approved colours with a uniform finish.

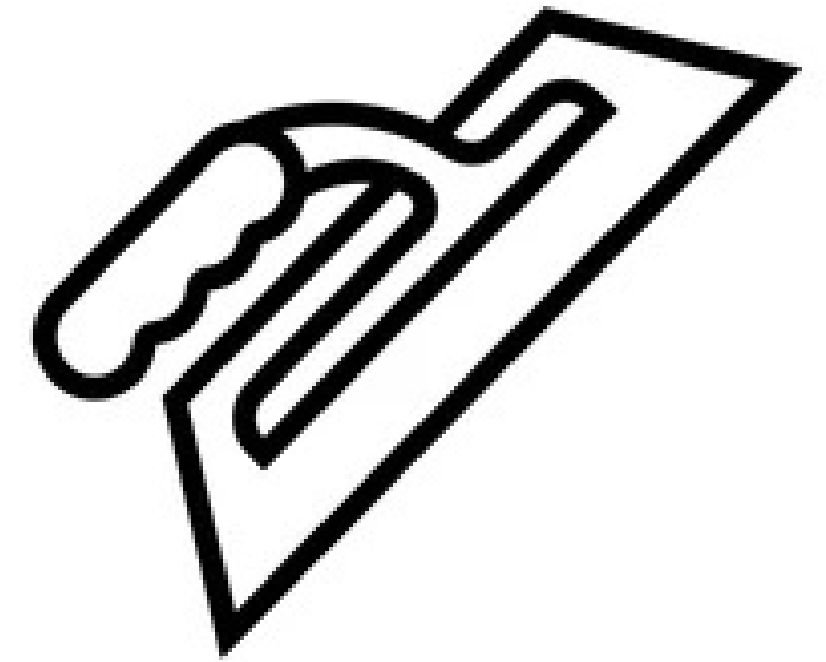

RENOVO[®]
SYNTHETIC PLASTER
THE PERFECT PERMANENT FINISH

Different Texture Finishes with different tools

Finishing with Roller



Finishing with Trowel



Finishing with Brush



Why use Renovo Synthetic Plaster & Overcoat?

- Synthetic fibre-based → flexible coating; prevents cracks (except structural/static cracks)
- Improves plaster thixotropy → no separation & strong non-sag property → thicker application possible
- Proven durability in extreme climatic conditions
- High UV resistance, tear strength, acid & alkali resistance
- Resistant to mildew, moss & fungus → ideal for hospitals, food & pharmaceutical areas
- Self-primed material → no primer required before or after application
- When over-coated with Renovo Overcoat → no regular repainting needed due to breathing properties



- **Strong adhesion** on cement surfaces → reduces chances of peeling, flaking or cracking
- High shear bond strength → coating stays intact over time
- **Enhanced water resistance & water repellency.**
- Greater **durability & washability.** → less surface damage during cleaning
- **Thicker protective film** (approx. 2× typical coatings; ~2.5 mm with system) → more flexibility, richer appearance & better sheen
- **Maintains** a cleaner, **low-dirt surface** for longer periods

Precautions before & after Application

Surface preparation (client scope):

- RCC complete, plain & level surface (no undulations)
- Edges intact, cracks filled
- All snags rectified before painting
- For Mivan surface → grinding & levelling

Inspection:

- Manufacturer/applicator inspects readiness within 3 working days of handover

Final checks (applicator scope)

- Uniform finish & sheen
- No patches or brush/roller marks
- Clean paint stains



Executed and Completed work with all

REPUTED



Builders across the Country



Completed more than

2000

Projects
in Telangana alone



Supplied and Applied RENOVO for more than
2 Billion Sft
across the Country

Thank You!

Please contact us for any further details

**RENOVO**[®]

SYNTHETIC PLASTER

THE PERFECT PERMANENT FINISH

Manufacturing & Application by

Damani Dyestuff Ltd

M No. 9959634770

M No. 9000788477

E-Mail - info@bbsllp.org



**Authorised Marketer in
Telangana, Andhra Pradesh, Kolkata
Banerjee Building Solutions LLP**