




# KOLKHA

LAUNDRY PRODUCTS

PRESSING ROLLER CLOTH


DRYING BELT

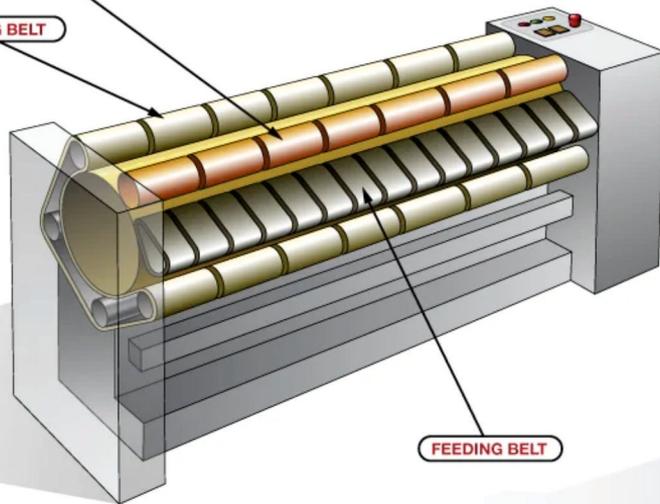

FEEDING BELT



MULTITURN FELT

GUIDING TAPES

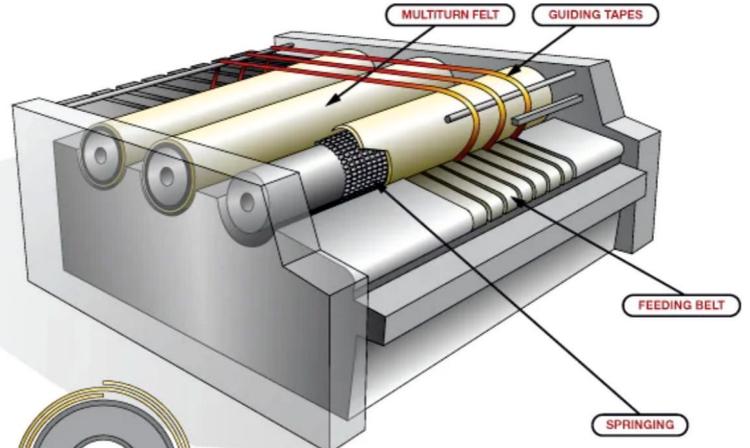

FEEDING BELT

SPRINGING

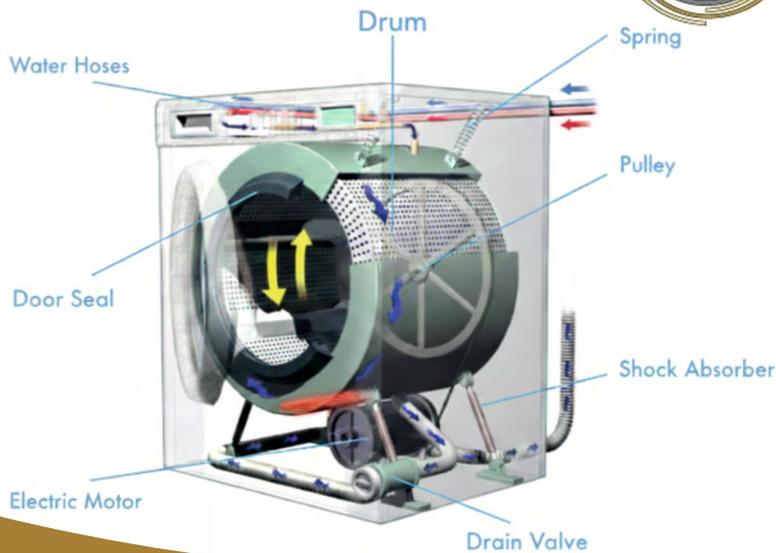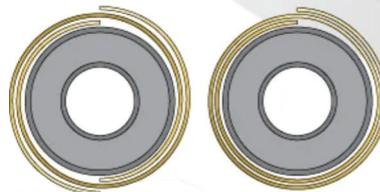

Water Hoses

Drum

Spring

Pulley

Shock Absorber

Drain Valve

Door Seal

Electric Motor

## IRONER FELTS (CLOTHES)

### Multiturn

1- MP 95 B-01-950gr/m<sup>2</sup>  
(300-330-360-380-440cm)  
Polyester 150-170°C working temperature

2- MPC 90-01-900gr/m<sup>2</sup>  
(330-360-380cm)  
Polyester 160-180°C working temperature

3- MC 80 HP-05-800gr/m<sup>2</sup>  
(330-360-380cm)  
M-Aramid 170-220°C working temperature  
Polyester-Meta Aramid

4- MCM 80-08-830gr /m<sup>2</sup>  
Meta Aramid - MOLLETON 170-220°C working temperature  
(330-360-380cm)



### Monoturn

5-MP 400-01-3900gr/m<sup>2</sup>  
(315-345-365cm)  
Polyester 160-185°C working temperature  
17.5mm thickness

6-MPC 420-01-4200gr/m<sup>2</sup>  
(315-345-365cm)  
Polyester-Nomex 180-200°C working  
temperature 16.5mm thickness


7-MPCDO 390-01-3900gr/m<sup>2</sup>  
(315-345-365cm)  
Polyester Meta Aramid - 220°C  
working temperature 16.5mm thickness

## IRONER BELTS

Ironing belt made of a special Polyester/Meta-Aramide needlefelt of 1500 g/m<sup>2</sup>,  
Strongly heat-set, thickness approx. 5,5 mm, fastening by belt-hooks made of stainless  
steel, confectioning with reinforced fabric and covering-flap made of Meta-Aramide  
needlefelt of 400 g/m<sup>2</sup>

Presentation:

- Ready-made belts according to ironer dimension
- Roll goods in market usual widths from 150 to 400 mm and in piece-lengths from  
25 up to 50 linear metres

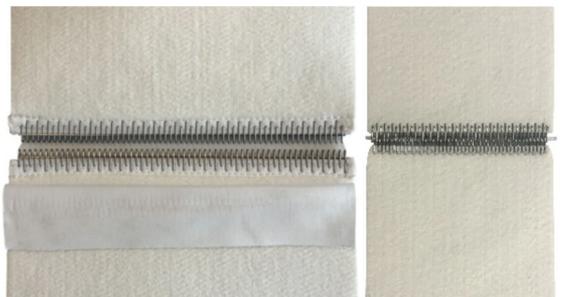

## IRONER FEED

Feeding band made of Polyester needlefelt, thickness 2,5 mm, special hardening, flame  
singed and calendered on the linen side, welded edges

Widths: from 30 to 200 mm

Presentation: Rolls of approx. 50,- linear metres or bands in ready-made assembling




## FEEDER- / FOLDER- / CONVEYOR-BANDS

### IRONER BELT ANTISTATIC

Feeding band made of Polyester needlefelt, thickness 2,5 mm, special hardening, **antistatic** flame singed and calendered on the linen side, welded edges

Widths: from 30 to 200 mm

Presentation: Rolls of approx. 50,- linear metres or bands in ready-made assembling

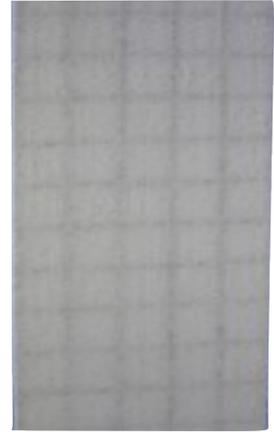


### PERFORATED FELT BELT

Thickness 2 mm , special hardening, flame singed and calendered on the linen side, welded edges, with perforations for vacuum feeding

Standard widths: 30 mm up to 200 mm

In all common perforation sizes and patterns

Presentation: Rolls of approx. 50, meters or bands in ready-made assembling

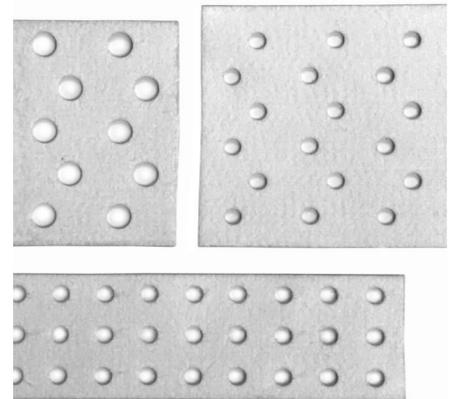


### COTTON BELT

Woven feeding band made of 100% cotton, thickness 2mm, with marker thread (on request)

Standard widths: 40, 50, 60, 75, 88,100 mm

Presentation: Rolls of approx. 100,- linear meters

or belts in ready-made assembling

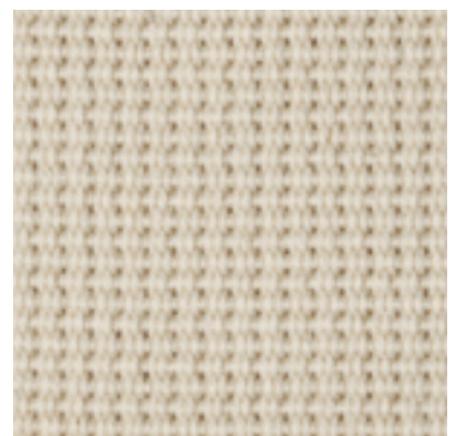

## FEEDER- / FOLDER- / CONVEYOR-BANDS

### **COTTON BELT ANTISTATIC**

*Woven feeding band, antistatic, made of cotton and a blend of stainless steel fibre, thickness 2 mm*

*Standard widths: 50,60,65,70,75 mm*

*Presentation: Rolls of approx. 100,- linear meters  
or belts in ready-made assembling*



### **COTTON BELT WITH EXTERNAL RUBBER**

*2 ply twisted cotton ring with rubber thread Thickness: 2mm*

*Height: 50 mm or belts in ready-made assembling*



### **RUBBER BELT (KANNEGISSER)**

*Rubber belt for feeder and folders machines, with green surface as usual for equipment of Kannegiesser. Width 40-50 mm, other sizes on request. Available per roll of 40 meter or tailor-made and equipped with connectors.*



### **ELASTIC BELT, WIDTH 50-88-115mm**

*Elastic belt for feeder and folder machines, made with lycra for longlasting elasticity.*

*Available in 3 widths. Available per roll of 50 meter, or on request tailor-made and equipped with connectors.*



## IRONER GUIDE TAPES

### Polyester Nomex Max 195°C



<i>Frist</i>	<b>Quality</b>	<i>Second</i>
13 mm	<b>Width</b>	13 mm
195°C	<b>Max. Temp.</b>	185°C
2 Gr / m.	<b>Weight</b>	3,07 Gr / m.
400 m.	<b>Length</b>	400 m.
30 mm.	<b>Thicknes</b>	43 mm.
<i>Unlined</i>	<b>Figure</b>	<i>Double Lined</i>

### Polyester Max 185°C



## IRONER WAX

Clean wax (paraffin) Max 210 °C -185°C  
 Phsical forms : Flake, Bead, Coarse Powder – Bright White  
 Types of packing ready for sale : 20 – 25 kg. sakes  
 Can be used all kind of ironer machine.  
 Brokfield visocosity at 135 °C  
 Using method : its applied with a pocketed wax application cloth  
 This product informations include indicative acknowledgements  
 With a minimum fat content, it leaves minimal residue.



## WAXING CLOTH



Its heat-resistant structure ensures a long lifespan.  
 With polyester pocket and polishing felts.  
 Produced with cotton, polyester or Nomex fabric.  
 Sizes: 150 x 180 cm / 150 x 320 cm  
 The application should be done while the ironer is hot.  
 Applying it once a day is sufficient.  
 It is not used in the cleaning process; it is only used in wax application.  
 it can be manufactured in custom sizes outside of standard dimensions.

## BELT FASTENER

25 G 300 (24 Pcs x 30 cm = 7,20 m) : For feeding and coton belts  
 25 SPG 048 W (100 Pcs x 10 cm = 10,0 m) : For elastic belts  
 40 LLS 33 (24 Pcs x 30 cm = 7,2 m) : For ironer belts  
 A34/A35/A36 Serie (12 Pcs x 30cm= 3,60m) : For green-black belts  
 A series are metal welded clips.  
 Clips pressing pressure applied in the hydraulic press unit : 195 bar



Stainless steel connecting wire is a critical component of the fastenig. Unfortunately, the selection of a connecting pin is often an afterthought. Many users substitute various materials such as welding rod, baling wire, etc. The results can be catastrophic-pin breakage, premature wear of fastener loops, and unscheduled downtime. We offers a wide selection of clips connecting wire types specifically designed to provide long pin life and minimal wear to the fastener loops.

## SPRING PADDING

- Type RSH, galvanized, hard
- Type ESH, Inox, hard
- Type RSW, galvanized, soft
- Type ESW, Inox, soft

All types from 6 up to 16 mm springs height



## DRAIN VALVE

New generations drain valve  
 Inlet - Outlet 75 mm width and 180 degree angle,  
 Permanently (normally) closed 220 W.  
 Top foam overflow,  
 Moblen flexible plastic raw material more resistant to breakage,  
 Stainless steel internal switch against power outages,  
 Motor, coil winding and spare parts supply available





### **PTFE 1,3 mm TEFLON COATING**

First quality, brown color, and standard width is 1000 mm., Length is variable  
 PTFE fiberglass adhesive coating is made from Teflon film.  
 High temperature & cold resistant. Smooth surface, non-stick and easy to clean.  
 Fire retardant, excellent dimensional stability and high strength.  
 Antistatic surface, high insulation and ultraviolet protection.  
 It is resistant to chemical corrosion, strong acids, and various organic solvents.  
 It prevents dirt and corrosion, is non-stick, and provides a glossy surface.

### **NON-SLIP RUBBER WRAP BELT**



Thickness: 2mm,  
 Backing: polyester + cotton,  
 Max. Temperature: 100  
 High Durability and  
 Long Service Life  
 Excellent performance even in  
 confined spaces and changing  
 lines Standard width: 50 mm.,  
 Ideal for Easy Assembly and  
 Hygienic Applications, Wide  
 Operating Temperature Range



### **COMPRESSION WINDING BELT**

It is manufactured from the same material as the ironer belt.  
 The width measurement generally varies between 40 and 50 mm.  
 The lower roller must be thoroughly cleaned before the winding wrap process.  
 The polyester surface should be in touch to metal;  
 Nomex should be rolled facing outwards.  
 Winding belt should be secured at both ends with rivets, and its underside should  
 be glued to the metal.



**330 KG.  
DRUM**



**DOWPER (SOLVENT)  
PERCHHLORETHYLENE**

**30 KG.  
CAN**



Tetrakloretilen / PCE / C<sub>2</sub>Cl<sub>4</sub> / Cl<sub>2</sub>C=CCl<sub>2</sub> / CAS Number 127-18-4  
A clear, colorless, non-flammable, volatile liquid with like odor.  
It is stable in the presence of general chemical is easily recyclable  
Molecular weight: 165.8 - Density: 1.619 gm/cc - Flash point: None  
Chlorinated solvents are used in almost every manufacturing sector operating in the industrial field for processes such as degreasing, cleaning dirt and other residues..

**JOLLY SMAK 10 KG**



Jolly Smak 10 Kg. Pre-Scrub Detergent  
Jolly Smak high cleaning power pre-stain remover for general scrubbing. Contains high performance for water based stains and specific formula for heavy stains on clothing. Jolly Smak is suitable for use on all types of fabrics, rinses easily over the intervened area and does not bleach on colors.  
In practice it is recommended to dilute with water. It should be noted that the dilution can also be carried out with perchlorethylene.

**PREZYM ENZYMATIC PRE-SPOTTING AGENT**

Pre-Zym Collar and Cuff Brushing Chemical 5 kg.

- Specially designed for use in laundries, this is a practical collar, cuff, and sleeve edge brushing chemical for wet washing.
- It is individually effective on all grease and grease-based systems and is applied locally to stains using a spray gun.
- It does not leave any negative side effects, such as damaging the color of delicate colors and fabrics, especially silk, satin, and linen.



## SPOTTING AGENTS FOR DRY CLEANING



**D-1 Sudore;** sweat, food, sauce and chocolate etc .. is effective on organic stains.



**D-2 Ruggine;** It is effective on rust and other oxidized metal stains.



**D-3 Vernice;** It is effective on stains such as paint, glue, ink, pitch, lipstick, ballpoint pen etc ...



**D-4 Proteiche;** blood, eggs, milk, ice cream, etc .. is effective on stains.



**D-5 Magre;** It is effective on stains such as grass, fruit, coffee tea etc

## TOGLISUDORE STAIN/ODOUR REMOVER

It is used to permanently absorb bad odors and remove stains such as sweat and urine without leaving any marks, such as yellowing.

This product is neutral on stains and suitable for all types of fabrics.

It is ready to use in 1 liter bottles and 5 liter filling cans.

### Technical Data

- Neutralizes unpleasant odors of sweat and urine
- It is effective in removing the yellowing caused by stains
- Neutral on colors
- Effective on all kinds of textile products
- Does not form foam in water distillation unit



## ANTIACIDIN ACID NEUTRALISER



It consists of macroporous, absorbent neutralizing silicates and fine white powders. Characteristic Features

Antiacidin® is used as a professional solvent protector, especially in new closed-loop machines with minimum perchloroethylene consumption, which are becoming increasingly common today. · Antiacidin® absorbs and minimizes unpleasant odors that may occur during the conversion of the solvent in the distillation process. · Antiacidin® is a machine-friendly product that prevents wear and tear on the most sensitive parts of dry cleaning and washing machines. · It does not cause any problems in the separator; on the contrary, it maintains the functionality of the purification device by keeping the water in an optimal acid range.

## OKAY SPRAY IRONING STARCH 500 ml.

Save time: Okay starch spray keeps your iron clean and free of residue, making ironing faster and easier than ever. With our starch spray, you can iron fabrics without fear of leaving stains or dark residue on your favourite clothes.


No sticking: liquid starch can be used as a spray strength for ironing. Our starch spray ensures a smooth glide. The result: a fresh garment, free from stains and residue. With Okay starch spray, your iron glides easily over your fabrics.

Wrinkle-free: Okay starch spray is great for ironing your clothes, but can also be used laundry spray to create a wrinkle-free surface when cutting or sewing fabrics. Our starch spray adds fullness to your fabric, without stiffness, giving you a wrinkle-free surface to work with.



### **Trouserguards:**

Box of 2000 white trouser guards with latex strip. They avoid the development of wrinkles in the handed garments.

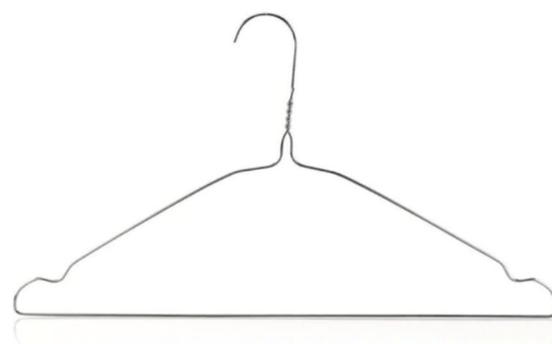

### **WIRE Hangers:**

500 pieces per box. Stainless galvanized coating, easier to carry and store than plastic hangers.

## **PACKING PLASTIC BAGS FOR LAUNDRY & DRY CLEANINGS**



Perforated Clothes Bag (Roll Type) = [Width: 60 cm Length: 90 cm] x 500 pcs  
For dry cleanings



Perforated Clothes Bag (Roll Type) = [Width: 70 cm Length: 120 cm] x 500 pcs  
For dry cleanings



Roll-Type Endless Garment Bag (60 cm x 500 m)  
For dry cleanings



70 x 100 Packaging Bag For Laundries (500 Pieces / Pack) – MDPE



55 x 85 Packaging Bag for Laundries (500 Pieces / Pack) – MDPE

## HYDROFIX LABELING PAPERS

### Hydrofix Till rolls 76 / 70 / 17,5 mm

Water and dry cleaning used in all kinds of solvents (perchloroethylene, hydrocarbons, etc.). Among the commonly used and preferred consumables for cash registers, our casing rolls are available in 8 different colors such as red, white, purple, blue, green, yellow, orange and pink.



### Hydrofix Till rolls 38 / 80 / 17,5 mm

Water and dry cleaning used in all kinds of solvents (perchloroethylene, hydrocarbons, etc.). Among the commonly used and preferred consumables for cash registers, our casing rolls are available in 8 different colors such as red, white, purple, blue, green, yellow, orange and pink.



### Hydrofix STRIPS 120x20mm 3500 PCS. (420m)

New generation;  
Hydrofix labeling papers developed with German / Original 'Alpha-Chem' quality;  
Packaged, pre-cut and practical to use. Its non-shedding, space-saving structure makes shipping and storage much easier. Much more economical in terms of price and length.



## TAGGING GUN



Original Avery Dennison  
Fine type  
A practical and affordable labeling device with a simple mechanical structure, frequently preferred.

## AVERY DENNISON TAGGING FASTENERS



5,000 fine (type) awning gun blades in dozens,  
It is a medium sized packaging plant designed for dry cleaning and laundry use.

## NEEDLE KIT



Original Avery Dennison  
Fine tip 5-piece kit

### Laundry roll container

- Dimensions 185 x 80 x 70 cm
- Stainless zinc Galvanized coating Wheel with brake mechanism
- Net Weight : 49 Kg.
- it is possible to ship as disassembled (folded and stacked)
- it can be re-installed with bolted connection apparatus after delivery
- Suitable Half-Door design for general laundry needs.
- Lockable door mechanism system
- Plexiglas-covered or tarpaulin storage options.



### Dirty Textiles Separating Container

Dimensions 160 x 135 x 60 cm 440 lt.

Net Weight : 25 Kg.

it is possible to ship as disassembled (folded and stacked)

Stainless zinc Galvanized coating Wheel with brake mechanism

it can be re-installed with bolted connection apparatus after delivery)

### Dirty Colletion Carts



Four movable wheels with two brakes  
 » Electrostatic painted DKP pipe and profile frame,  
 » Impact tires  
 Dimensions  
 Width : 60 cm  
 Length : 90 cm  
 Height : 90 cm

### Foldable Laundry Collection Carts



Large in use, small in space  
 It will meet your laundry needs in every collection way.  
 Laundry bags are detachable, and the carts fold easily.  
 Dimensions  
 Bags: 200 L  
 Wheels: 4 x 75 mm  
 Sizes : 760 x 460 x 760 mm

### Double-compartment Dirty Collection Carts



Four movable wheels with two brakes  
 Electrostatic painted DKP pipe and profile frame,  
 Impact tires,  
 Dimensions  
 Width : 53 cm  
 Length : 96 cm  
 Height : 104 cm

### Double-compartment Foldable Dirty Collection Carts



Large in use, small in space  
 It will meet your laundry needs in every collection way.  
 Laundry bags are detachable, and the carts fold easily.  
 Dimension  
 Bags: 2\*100 L  
 Wheels: 4 x 75 mm  
 Sizes : 760 x 460 x 960 mm

### Single Dirty Collection Carts



Four movable wheels with two brakes  
 Electrostatic painted DKP pipe and profile frame,  
 Impact tires,  
 Dimensions  
 Width : 53 cm  
 Length : 53 cm  
 Height : 104 cm

### Foldable Single Dirty Collection Carts



Large in use, small in space  
 It will meet your laundry needs in every collection way.  
 Laundry bags are detachable, and the carts fold easily.  
 Dimensions  
 Bags: 150 L  
 Wheels: 4 x 75mm  
 Sizes: 760 x 460 x 760mm

### Hanger Trolley



Four movable wheels with two brakes  
 Electrostatic painted DKP pipe and profile frame,  
 Impact tires  
 Dimensions  
 Width : 67 cm  
 Length : 152 cm  
 Height : 175 cm

### Bed Linen / Sheet Trolley



Four movable wheels with two brakes  
 Electrostatic painted DKP pipe and profile frame  
 Impact tires  
 Dimensions  
 Width : 65 cm  
 Length : 150 cm  
 Height : 150 cm


## Plastic Laundry Transport Container



External Dimensions 67 x 93 x 77 cm  
 Inner Dimensions 62 x 89 x 52 cm  
 Internal Volume : 270 Liters  
 Weight : 12,5 Kg.  
 Material : PCE Hand grip  
 slots are available Rainforced base.  
 It can be stacked on top of each other.  
 It has 4 swivel wheels


## Jumbo 500 Laundry Transport Container

A water drain valve can be optionally installed on the laundry container.  
 500 lt. plastic body of the laundry container is opak white.  
 The body of the laundry collection container is manufactured from PP linear polyethylene powder plastic raw material.  
 The rotationally molded plastic laundry cart is resistant to temperatures from -25 to +25 degrees Celsius.  
 The lower metal parts of the laundry collection cart are made of 25x25 angle iron and are electrostatically powder coated.  
 Clean or Dirty laundry labels can be placed on the body of the laundry collection container.

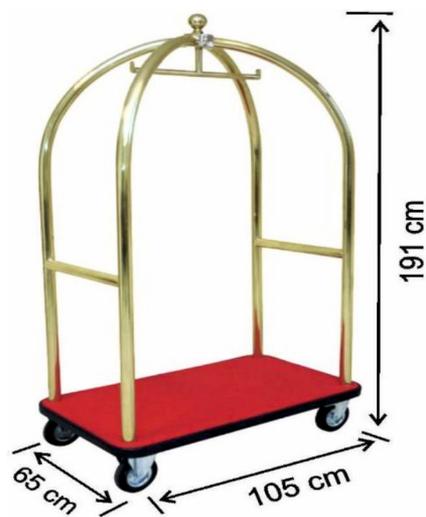

## Foldable Luggage Trolley

Foldable frame,  
 Carpeted surface  
 Two solid wheels  
 Dimensions  
 Width : 34/83 cm  
 Length : 65 cm  
 Height : 118 cm

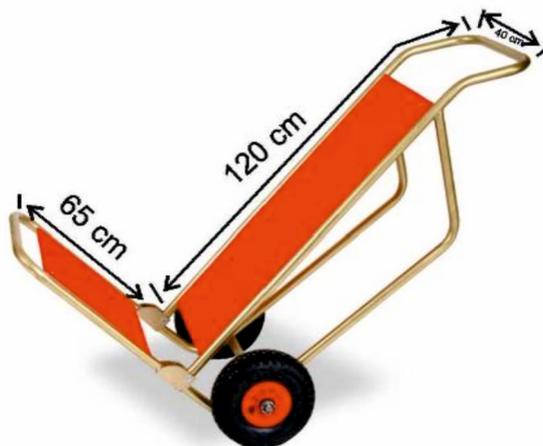

## Luggage Trolley

Bellboy carts are used in hotels for transporting clothes, suitcases, and luggage between floors.  
 -Carpeted Surface  
 -Shockproof Rubber  
 -Four movable wheels, two with brakes  
 -Product  
 Dimensions:  
 Width: 66 cm  
 Length: 105 cm  
 Height: 191 cm



ABOUT US..



'Kolkha Laundry Products' was established to supply spare parts for all models of industrial washing, drying, ironing, folding, and tunnel machines under various brands in the laundry sector for hotels, hospitals, military facilities, and private institutions.



Founded by experts in the industrial laundry sector in Europe, our company aims to provide fast and reliable service to our valued customers by continuously developing its product range.



To ensure customer satisfaction after sales, our company procures original spare parts directly from the manufacturer at the most competitive prices and in the fastest way possible, with convenient payment terms. In this regard, we extend our sincere thanks to the valuable managers of all the institutions and organizations in our portfolio who prioritize product and service quality.

Sincerely,

Kolkha Laundry Products..

