

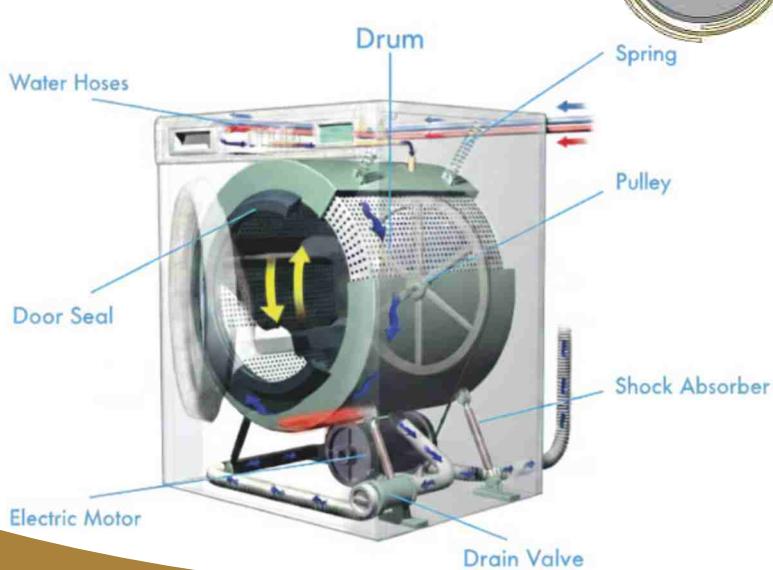


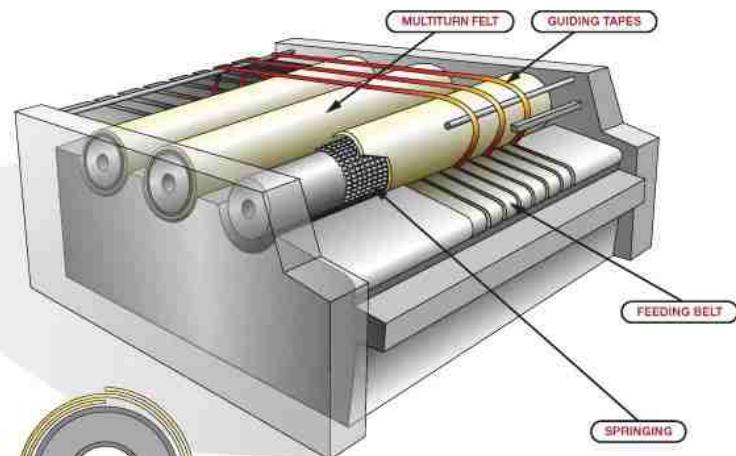

KOLKHA

LAUNDRY PRODUCTS

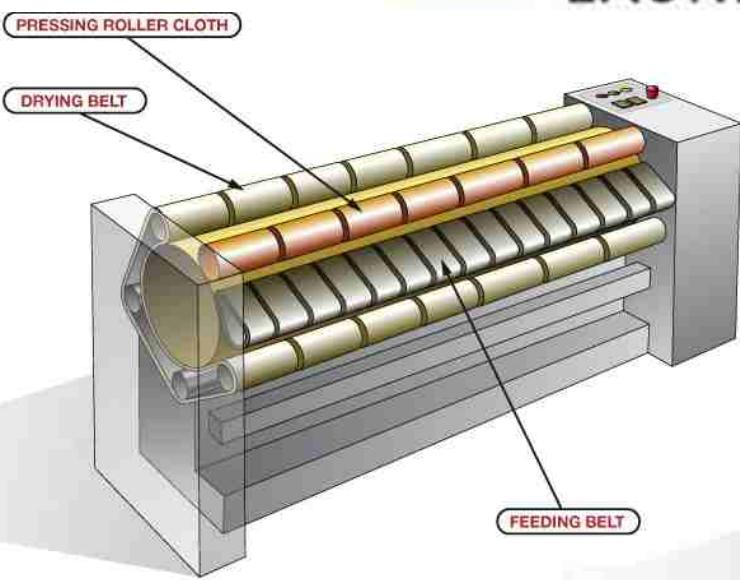

IRONER FELTS (CLOTHES)
Multiturn

1- MP 95 B-01-950gr/m²
 (300-330-360-380-440cm)
Polyester 150-170°C working temperature


Monoturn

5-MP 400-01-3900gr/m²
 (315-345-365cm)
*Polyester 160-185°C working temperature
 17.5mm thickness*

2- MPC 90-01-900gr/m²
 (330-360-380cm)
Polyester 160-180°C working temperature



6-MPC 420-01-4200gr/m²
 (315-345-365cm)

*Polyester-Nomex 180-200°C working
 temperature 16.5mm thickness*

3- MC 80 HP-05-800gr/m²
 (330-360-380cm)
*M-Aramid 170-220°C working temperature
 Polyester-Meta Aramid*

7-MPCDO 390-01-3900gr/m²
 (315-345-365cm)
*Polyester Meta Aramid - 220°C
 working temperature 16.5mm thickness*

4- MCM 80-08-830gr /m²
*Meta Aramid - MOLLETON 170-220°C working temperature
 (330-360-380cm)*

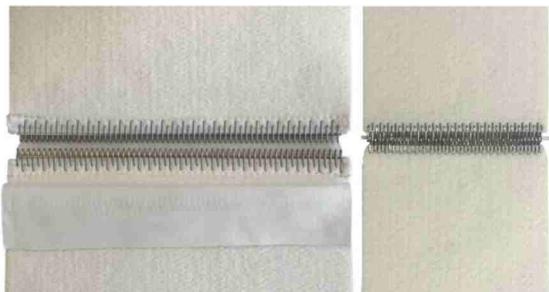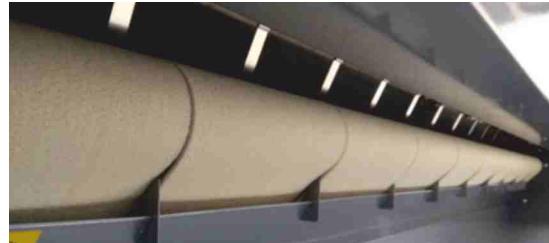IRONER BELTS
IRONTEX 150-01


Ironing belt made of a special Polyester/Meta-Aramid needlefelt of 1500 g/m²,

Strongly heat-set, thickness approx. 5.5 mm, fastening by belt-hooks made of stainless steel, confectioning with reinforced fabric and covering-flap made of Meta-Aramid needlefelt of 400 g/m²

IRONER FEED
FEEDTEX 95 - H

Feed band made of Polyester needlefelt, thickness 2.5 mm, heat-setd, flame singed and calendered on the linen side, welded edges, fastening by belt-hooks made of stainless steel

PERFORATED FEEDING BELTS


Presentation:

- Ready-made belts according to ironer dimensions
- individual dimensions according to customer-request

FEEDER- / FOLDER- / CONVEYOR-BANDS

TULONA® MP 85 BEA-01/01

Feeding band made of Polyester needlefelt, thickness 2 mm, special hardening, antistatic, flame singed and calendered on the linen side, welded edges

Standard widths: 30 mm to 200 mm

Presentation: Rolls of approx. 50,- linear meters
or belts in ready-made assembling



TULONA® MP 85 BE-01/01 GL

Feeding band made of Polyester needlefelt, thickness 2 mm, special hardening, flame singed and calendered on the linen side, welded edges, with perforations for vacuum feeding

Standard widths: 30 mm up to 200 mm

In all common perforation sizes and patterns



Presentation: Rolls of approx. 50, meters or bands in ready-made assembling

TULONA® IF-1

Woven feeding band made of 100% cotton, thickness 1,5 mm, with marker thread (on request)

Standard widths: 40, 50, 60, 75, 88 mm

Presentation: Rolls of approx. 100,- linear meters
or belts in ready-made assembling



FEEDER- / FOLDER- / CONVEYOR-BANDS

TULONA® IF PE AS-1

Woven feeding band, antistatic, made of cotton and a blend of stainless steel fibre, thickness 2 mm



Standard widths: 50, 60, 75 mm

Presentation: Rolls of approx. 100,- linear meters
or belts in ready-made assembling

TULONA® COT/RU-2

Woven feeding band made of 100% cotton, with rubber coating on the linen side, thickness 2 mm



Standard widths: 50, 60, 75 mm

Presentation: Rolls of approx. 100,- linear meters
or belts in ready-made assembling


Rubber belt (Kannegiesser)

Rubber belt for feeder and folders machines, with green surface as usual for equipment of Kannegiesser. Width 40-50 mm, other sizes on request. Available per roll of 40 meter or tailor-made and equipped with connectors.




Elastic belt, width 50-118mm

Belt for feeders and folders, made stretchy by a special weave. Width 115mm. Available per roll of 50 meter or on request tailor-made and equipped with connectors.

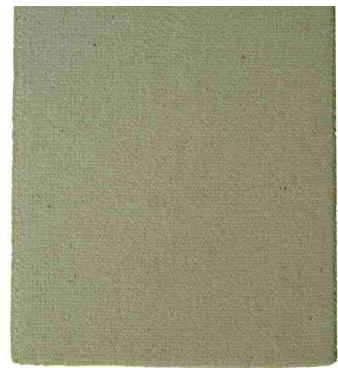


IRONER GUIDE TAPES

Polyester Nomex Max 195°C

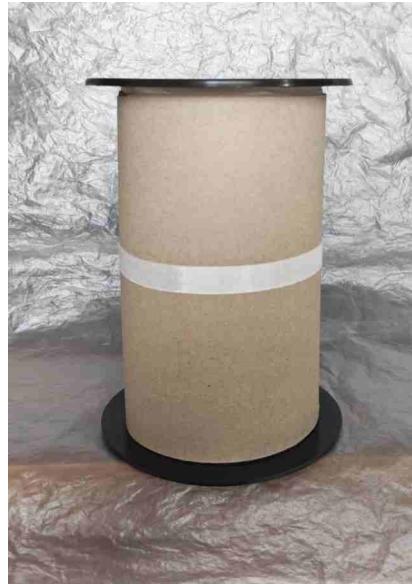

<i>Frist</i>	Quality	<i>Second</i>
13 mm	Width	13 mm
195°C	Max. Temp.	185°C
2 Gr / m.	Weight	3,07 Gr / m.
400 m.	Length	400 m.
30 mm.	Thicknes	43 mm.
<i>Unlined</i>	Figure	<i>Double Lined</i>

Polyester Max 185°C

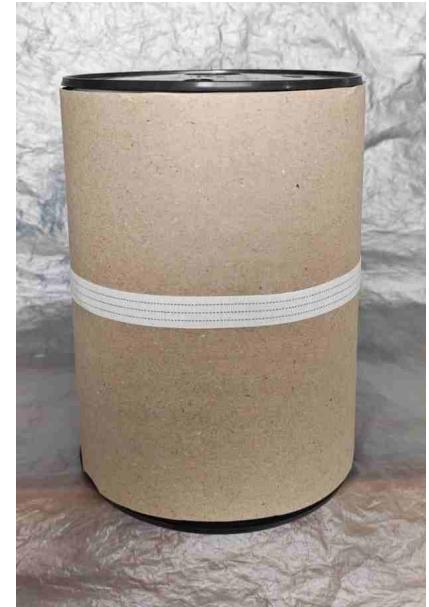

IRONER WAX

Clean wax (paraffin) Max 210 °C -185°C

Physical forms : Flake, Bead, Coarse Powder – Bright White

Types of packing ready for sale : 20 – 25 kg. sacks

Can be used all kind of ironer machine.

Brokfield viscosity at 135 °C

Using method : its applied with a pocketed wax application cloth

This product informations include indicative acknowledgements

With a minimum fat content, it leaves minimal residue.



WAXING CLOTH



Its heat-resistant structure ensures a long lifespan.

With polyester pocket and polishing felts.

Produced with cotton, polyester or Nomex fabric.

Sizes: 150 x 180 cm / 150 x 320 cm

The application should be done while the ironer is hot.


Applying it once a day is sufficient.

It is not used in the cleaning process; it is only used in wax application.

it can be manufactured in custom sizes outside of standard dimensions.

BELT FASTENER


25 G 300 (24 Pcs x 30 cm = 7,20 m) : For feeding and coton belts
 25 SPG 048 W (100 Pcs x 10 cm = 10,0 m) : For elastic belts
 40 LLS 33 (24 Pcs x 30 cm = 7,2 m) : For ironer belts
 A34/A35/A36 Serie (12 Pcs x 30cm= 3,60m) : For green-black belts
 A series are metal welded clips.
 Clips pressing pressure applied in the hydraulic press unit : 195 bar

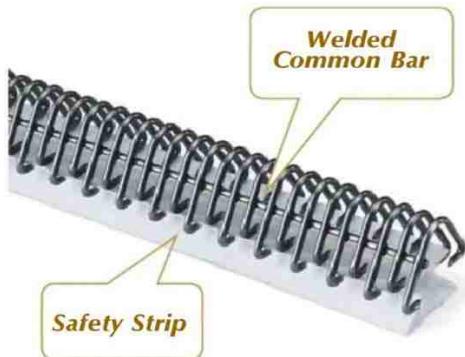

Stainless steel connecting wire is a critical component of the fastening. Unfortunately, the selection of a connecting pin is often an afterthought. Many users substitute various materials such as welding rod, baling wire, etc. The results can be catastrophic-pin breakage, premature wear of fastener loops, and unscheduled downtime. We offer a wide selection of clips connecting wire types specifically designed to provide long pin life and minimal wear to the fastener loops.

SPRING PADDING

-Type RSH, galvanized, hard
 -Type ESH, Inox, hard
 -Type RSW, galvanized, soft
 -Type ESW, Inox, soft
 All types from 6 up to 16 mm springs height

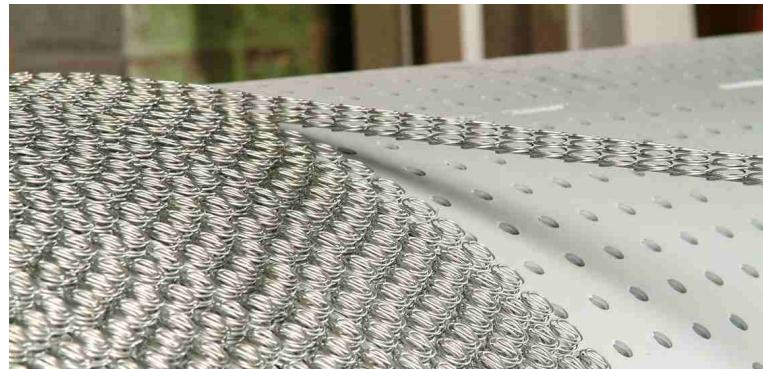

DRAIN VALVE

New generations drain valve
 Inlet - Outlet 75 mm width and 180 degree angle,
 Permanently (normally) closed 220 W.
 Top foam overflow,
 Moblen flexible plastic raw material more resistant to breakage,
 Stainless steel internal switch against power outages,
 Motor, coil winding and spare parts supply available





PTFE 1,3 mm TEFLOON COATING

First quality, brown color, and standard width is 1000 mm., Length is variable
 PTFE fiberglass adhesive coating is made from Teflon film.
 High temperature & cold resistant. Smooth surface, non-stick and easy to clean.
 Fire retardant, excellent dimensional stability and high strength.
 Antistatic surface, high insulation and ultraviolet protection.
 It is resistant to chemical corrosion, strong acids, and various organic solvents.
 It prevents dirt and corrosion, is non-stick, and provides a glossy surface.

NON-SLIP RUBBER WRAP BELT



Thickness: 2mm,
 Backing: polyester + cotton,
 Max. Temperature: 100
 High Durability and
 Long Service Life
 Excellent performance even in
 confined spaces and changing
 lines Standard width: 50 mm.,
 Ideal for Easy Assembly and
 Hygienic Applications, Wide
 Operating Temperature Range



COMPRESSION WINDING BELT

It is manufactured from the same material as the ironer belt.
 The width measurement generally varies between 40 and 50 mm.
 The lower roller must be thoroughly cleaned before the winding wrap process.
 The polyester surface should be in touch to metal;
 Nomex should be rolled facing outwards.
 Winding belt should be secured at both ends with rivets, and its underside should
 be glued to the metal.



**330 KG.
DRUM**
**DOWPER (SOLVENT)
PERCHLORETHYLENE**
**30 KG.
CAN**

 Tetrakloretilen / PCE / C₂Cl₄ / Cl₂C=CCl₂ / CAS Number 127-18-4

A clear, colorless, non-flammable, volatile liquid with like odor.
 It is stable in the presence of general chemical is easily recyclable
 Molecular weight: 165.8 - Density: 1.619 gm/cc - Flash point: None
 Chlorinated solvents are used in almost every manufacturing sector
 operating in the industrial field for processes such as degreasing,
 cleaning dirt and other residues..


JOLLY SMAK 10 KG

Jolly Smak 10 Kg. Pre-Scrub Detergent

Jolly Smak high cleaning power pre-stain remover for general scrubbing. Contains high performance for water based stains and specific formula for heavy stains on clothing. Jolly Smak is suitable for use on all types of fabrics, rinses easily over the intervened area and does not bleach on colors.

In practice it is recommended to dilute with water. It should be noted that the dilution can also be carried out with perchlorethylene.


PREZYM ENZYMATIC PRE-SPOTTING AGENT

Pre-Zym Collar and Cuff Brushing Chemical 5 kg.

- Specially designed for use in laundries, this is a practical collar, cuff, and sleeve edge brushing chemical for wet washing.
- It is individually effective on all grease and grease-based systems and is applied locally to stains using a spray gun.
- It does not leave any negative side effects, such as damaging the color of delicate colors and fabrics, especially silk, satin, and linen.



SPOTTING AGENTS FOR DRY CLEANING

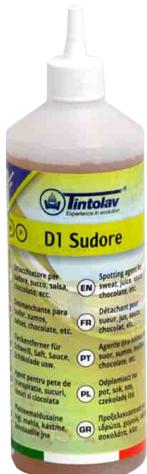

D-1 Sudore; sweat, food, sauce and chocolate etc .. is effective on organic stains.



D-4 Proteiche; blood, eggs, milk, ice cream, etc .. is effective on stains.



D-2 Ruggine; It is effective on rust and other oxidized metal stains.



D-3 Vernice; It is effective on stains such as paint, glue, ink, pitch, lipstick, ballpoint pen etc ...



D-5 Magre; It is effective on stains such as grass, fruit, coffee tea etc

TOGLISUDORE STAIN/ODOUR REMOVER

It is used to permanently absorb bad odors and remove stains such as sweat and urine without leaving any marks, such as yellowing.

This product is neutral on stains and suitable for all types of fabrics.

It is ready to use in 1 liter bottles and 5 liter filling cans.

Technical Data

- Neutralizes unpleasant odors of sweat and urine
- It is effective in removing the yellowing caused by stains
- Neutral on colors
- Effective on all kinds of textile products
- Does not form foam in water distillation unit



ANTIACIDIN ACID NEUTRALISER



It consists of macroporous, absorbent neutralizing silicates and fine white powders. Characteristic Features

Antiacidin® is used as a professional solvent protector, especially in new closed-loop machines with minimum perchloroethylene consumption, which are becoming increasingly common today. · Antiacidin® absorbs and minimizes unpleasant odors that may occur during the conversion of the solvent in the distillation process. · Antiacidin® is a machine-friendly product that prevents wear and tear on the most sensitive parts of dry cleaning and washing machines. · It does not cause any problems in the separator; on the contrary, it maintains the functionality of the purification device by keeping the water in an optimal acid range.

OKAY SPRAY IRONING STARCH 500 ml.

Save time: Okay starch spray keeps your iron clean and free of residue, making ironing faster and easier than ever. With our starch spray, you can iron fabrics without fear of leaving stains or dark residue on your favourite clothes.


No sticking: liquid starch can be used as a spray strength for ironing. Our starch spray ensures a smooth glide. The result: a fresh garment, free from stains and residue. With Okay starch spray, your iron glides easily over your fabrics.

Wrinkle-free: Okay starch spray is great for ironing your clothes, but can also be used laundry spray to create a wrinkle-free surface when cutting or sewing fabrics. Our starch spray adds fullness to your fabric, without stiffness, giving you a wrinkle-free surface to work with.



Trouserguards:

Box of 2000 white trouser guards with latex strip. They avoid the development of wrinkles in the handed garments.

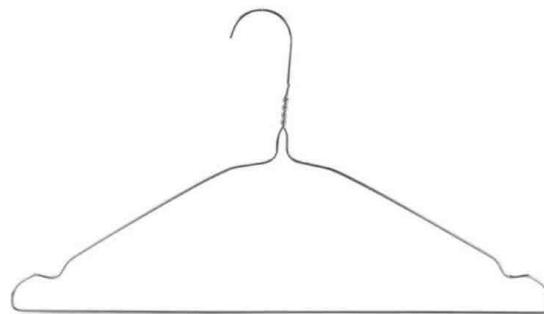

WIRE Hangers:

500 pieces per box. Stainless galvanized coating, easier to carry and store than plastic hangers.

PACKING PLASTIC BAGS FOR LAUNDRY & DRY CLEANINGS



Perforated Clothes Bag (Roll Type) = [Width: 60 cm Length: 90 cm] x 500 pcs
For dry cleanings



Perforated Clothes Bag (Roll Type) = [Width: 70 cm Length: 120 cm] x 500 pcs
For dry cleanings



Roll-Type Endless Garment Bag (60 cm x 500 m)
For dry cleanings



70 x 100 Packaging Bag For Laundries (500 Pieces / Pack) – MDPE



55 x 85 Packaging Bag for Laundries (500 Pieces / Pack) – MDPE

HYDROFIX LABELING PAPERS

Hydrofix Till rolls 76 / 70 / 17,5 mm

Water and dry cleaning used in all kinds of solvents (perchlorethylene, hydrocarbons, etc.). Among the commonly used and preferred consumables for cash registers, our casing rolls are available in 8 different colors such as red, white, purple, blue, green, yellow, orange and pink.



Hydrofix Till rolls 38 / 80 / 17,5 mm

Water and dry cleaning used in all kinds of solvents (perchlorethylene, hydrocarbons, etc.). Among the commonly used and preferred consumables for cash registers, our casing rolls are available in 8 different colors such as red, white, purple, blue, green, yellow, orange and pink.



Hydrofix STRIPS 120x20mm 3500 PCS. (420m)

New generation;

Hydrofix labeling papers developed with German / Original 'Alpha-Chem' quality; Packaged, pre-cut and practical to use. Its non-shedding, space-saving structure makes shipping and storage much easier. Much more economical in terms of price and length.



TAGGING GUN



Original Avery Dennison
Fine type

A practical and affordable labeling device with a simple mechanical structure, frequently preferred.

AVERY DENNISON TAGGING FASTERNERS



5,000 fine (type) awning gun blades in dozens, It is a medium sized packaging plant designed for dry cleaning and laundry use.

NEEDLE KIT



Original Avery Dennison
Fine tip 5-piece kit

Laundry roll container

- Dimensions 185 x 80 x 70 cm
- Stainless zinc Galvanized coating Wheel with brake mechanism
- Net Weight : 49 Kg.
- it is possible to ship as disassembled (folded and stacked)
- it can be re-installed with bolted connection apparatus after delivery
- Suitable Half-Door design for general laundry needs.
- Lockable door mechanism system
- Plexiglas-covered or tarpaulin storage options.



Dirty Textiles Separating Container

Dimensions 160 x 135 x 60 cm 440 lt.

Net Weight : 25 Kg.

it is possible to ship as disassembled (folded and stacked)

Stainless zinc Galvanized coating Wheel with brake mechanism

it can be re-installed with bolted connection apparatus after delivery)

Dirty Collection Carts



Four movable wheels with two brakes
 » Electrostatic painted DKP pipe and profile frame,
 » Impact tires
 Dimensions
 Width : 60 cm
 Length : 90 cm
 Height : 90 cm

Foldable Laundry Collection Carts

Large in use, small in space
 It will meet your laundry needs in every collection way.
 Laundry bags are detachable, and the carts fold easily.
 Dimensions
 Bags: 200 L
 Wheels: 4 x 75 mm
 Sizes : 760 x 460 x 760 mm



Double-compartment Dirty Collection Carts



Four movable wheels with two brakes
 Electrostatic painted DKP pipe and profile frame,
 Impact tires,
 Dimensions
 Width : 53 cm
 Length : 96 cm
 Height : 104 cm

Double-compartment Foldable Dirty Collection Carts

Large in use, small in space
 It will meet your laundry needs in every collection way.
 Laundry bags are detachable, and the carts fold easily.
 Dimension
 Bags: 2*100 L
 Wheels: 4 x 75 mm
 Sizes : 760 x 460 x 960 mm



Single Dirty Collection Carts



Four movable wheels with two brakes
 Electrostatic painted DKP pipe and profile frame,
 Impact tires,
 Dimensions
 Width : 53 cm
 Length : 53 cm
 Height : 104 cm

Foldable Single Dirty Collection Carts

Large in use, small in space
 It will meet your laundry needs in every collection way.
 Laundry bags are detachable, and the carts fold easily.
 Dimensions
 Bags: 150 L
 Wheels: 4 x 75mm
 Sizes: 760 x 460 x 760mm



Hanger Trolley



Four movable wheels with two brakes
 Electrostatic painted DKP pipe and profile frame,
 Impact tires
 Dimensions
 Width : 67 cm
 Length : 152 cm
 Height : 175 cm

Bed Linen / Sheet Trolley



Four movable wheels with two brakes
 Electrostatic painted DKP pipe and profile frame
 Impact tires
 Dimensions
 Width : 65 cm
 Length : 150 cm
 Height : 150 cm

Plastic Laundry Transport Container



External Dimensions 67 x 93 x 77 cm

Inner Dimensions 62 x 89 x 52 cm

Internal Volume : 270 Liters

Weight : 12,5 Kg.

Material : PCE Hand grip
 slots are available Reinforced base.
 It can be stacked on top of each other.

It has 4 swivel wheels

Jumbo 500 Laundry Transport Container

A water drain valve can be optionally installed on the laundry container.

500 lt. plastic body of the laundry container is opaque white.

The body of the laundry collection container is manufactured from PP linear polyethylene powder plastic raw material.

The rotationally molded plastic laundry cart is resistant to temperatures from -25 to +25 degrees Celsius.

The lower metal parts of the laundry collection cart are made of 25x25 angle iron and are electrostatically powder coated.

Clean or Dirty laundry labels can be placed on the body of the laundry collection container.



Luggage Trolley

Bellboy carts are used in hotels for transporting clothes, suitcases, and luggage between floors.

-Carpeted Surface

-Shockproof Rubber

-Four movable wheels, two with brakes


-Product

Dimensions:

Width: 66 cm

Length: 105 cm

Height: 191 cm

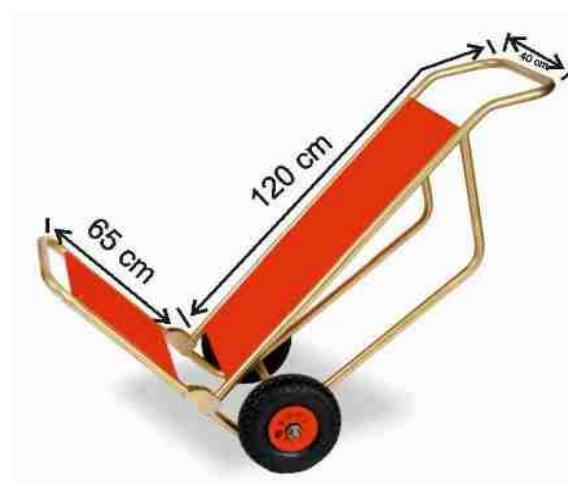

Foldable Luggage Trolley

Foldable frame,

Carpeted surface

Two solid wheels

Dimensions

Width : 34/83 cm

Length : 65 cm

Height : 118 cm

ABOUT US..



'Kolkha Laundry Products' was established to supply spare parts for all models of industrial washing, drying, ironing, folding, and tunnel machines under various brands in the laundry sector for hotels, hospitals, military facilities, and private institutions.

Founded by experts in the industrial laundry sector in Europe, our company aims to provide fast and reliable service to our valued customers by continuously developing its product range.

To ensure customer satisfaction after sales, our company procures original spare parts directly from the manufacturer at the most competitive prices and in the fastest way possible, with convenient payment terms. In this regard, we extend our sincere thanks to the valuable managers of all the institutions and organizations in our portfolio who prioritize product and service quality.

Sincerely,

Kolkha Laundry Products..

KOLKHA Laundry Products

Supplying Georgia's hotels, hospitals, and dry cleaners with trusted industrial laundry solutions.

