



We Supply




Design
Web
Equipment





We Supply & Install

AW-FP100 Addressable Fire Alarm Control Panel


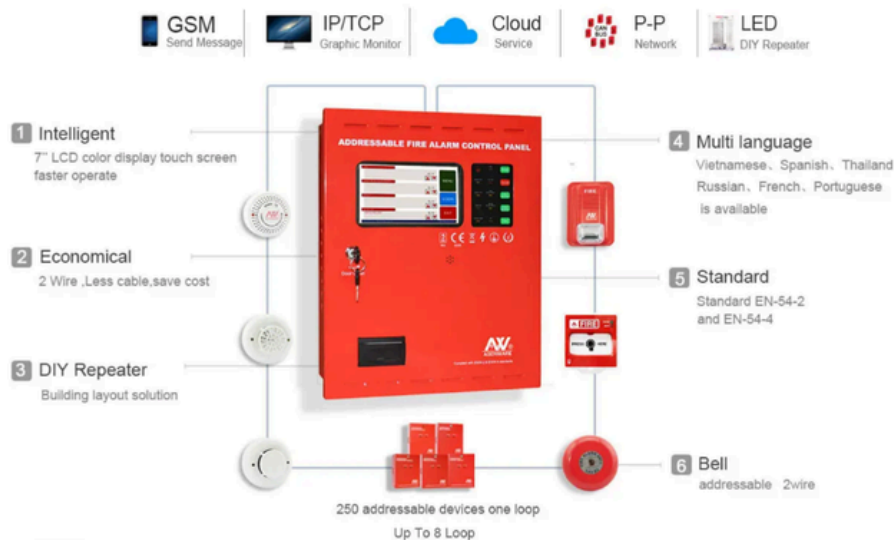


Asenware addressable fire alarm with LPCB EN54 certification





We Supply & Install

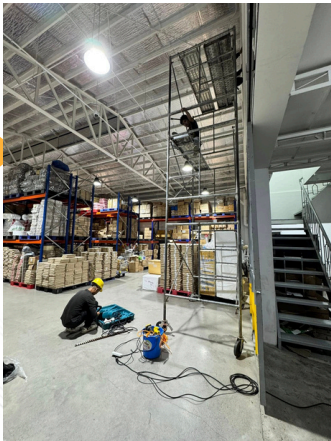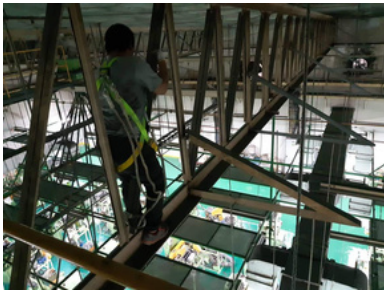





We Supply & Install

TOWER CRANE LOAD MOMENT INDICATOR SYSTEM


HAMMER HEAD

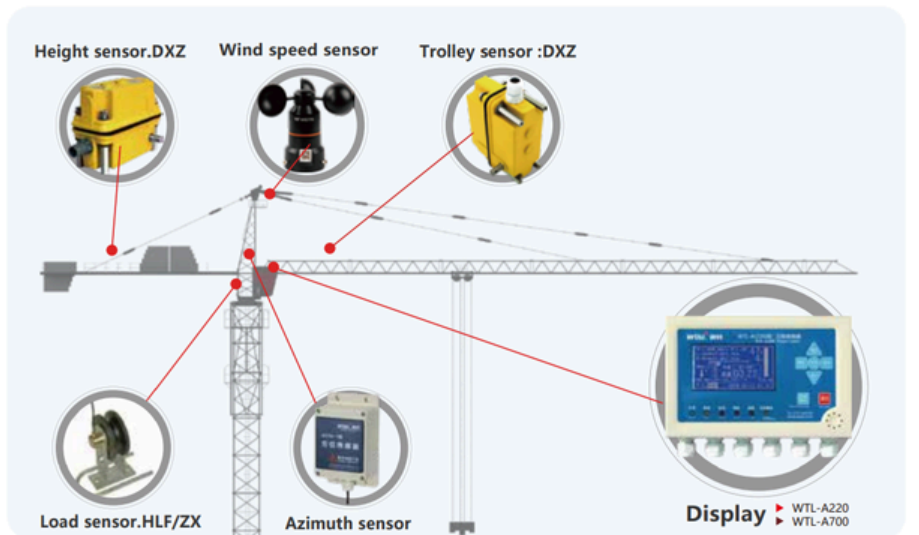


GANTRY CRANE OVERLOAD LIMITER SYSTEM

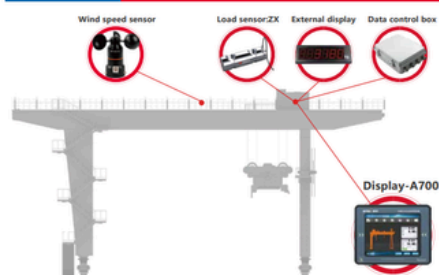


QUAYSIDE CRANE OVERLOAD LIMITER SYSTEM

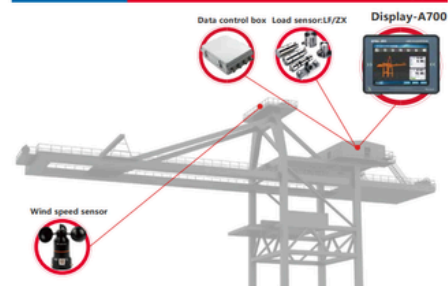

PORTAL CRANE LOAD MOMENT INDICATOR SYSTEM

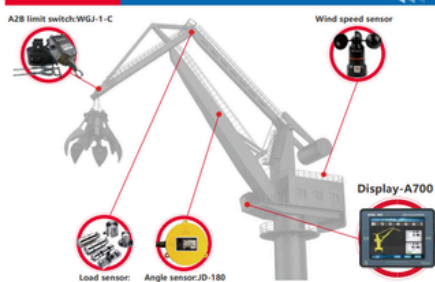

METALLURGICAL CRANE OVERLOAD LIMITER SYSTEM

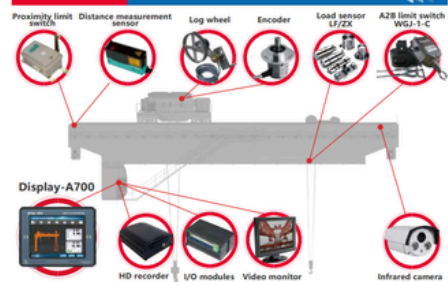



We Supply & Install

AUX
AIR CONDITIONER


 **JAPAN TECHNOLOGY**

Wide Application Range

Outdoor Units - ARV 6 Series

Long Piping Length

Thanks to the DC Inverter control technology and sub-cooling circuit technology, it is possible to design a system with longer piping and elevation difference which make it easier to design and installation.



- Max. Total piping length --- 1000m
- Max. piping length between ODU and farthest IDU --- 200m
- Max. piping length from 1st indoor branch to the farthest indoor unit --- 40m/90m*
- Max. Level difference between indoor units --- 30m
- Max. Level difference between ODU and IDU units --- 110m

*The longest length after first branch is 40m as standard can be extended to up to 90m under certain conditions. Please contact your local dealer for further information.



ARV Mini Series - All DC Inverter