

Straight Tap Connector

Easily connects to a tap or syphon connection (washer included)

Overview

JG Speedfit straight tap connector push-fit fitting for the connection of plastic or copper pipes to fixtures or appliances with a MBSP connection point. The tap connector comes complete with a brass swivel nut and sealing washer. Simply push the push-fit fitting fully onto the pipe and twist the plastic nut clockwise to lock in place. To demount the connection, unlock the nut by hand and push the collet towards the body of the push-fit fitting and pull the pipe to release.

The JG Speedfit straight tap connector is up to 40% faster to install than traditional methods and is easier to use in confined spaces by removing the need for hot works and tools. Designed, manufactured and assembled in the UK.

Features & Benefits

- Instant push-fit connection
- Install and demount in seconds without tools
- Safe flame-free installation, with no hot works, glue or flux
- Grip & Seal collet with stainless steel teeth and main O-Ring seal
- Twist & Lock mechanism secures fitting and adds compression
- Non-toxic, resists corrosion and no scale build-up
- Suitable for use with JG Speedfit PEX and polybutylene barrier pipe (inserts required) and copper pipe
- Suitable for hot and cold water and central heating systems



Product code	Description	Size	Bag QTY
PEMSTC1014	Tap Connector	10mm x 1/2"	10
PEMSTC1514	Tap Connector	15mm x 1/2"	10
PEMSTC1516	Tap Connector	15mm x 3/4"	5
PEMSTC2216	Tap Connector	22mm x 3/4"	5



50 year guarantee when used with JG Speedfit Layflat PB and PEX Barrier Pipes

Straight Tap Connector

Working parameters & specifications


Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	12
Central Heating	82	95, short term malfunction at 114	3
Hot Water (including unvented cylinders)	65	95	6

Materials


Body	X-Linked Polyethylene, White
O-Ring	Ethylene Polypropylene Diene Monomer (EPDM)
Collet	Nylon
Collet Teeth	Stainless Steel 301
Caps	Nylon (40% Mineral Filled), White
Compression Ring	Acetal Copolymer, White
Nut	Brass

Dimensions – All measurements in mm unless otherwise stated


The John Guest 10mm x 1/2 BSP Straight Tap Connector has been developed to satisfy the requirements of the U.K. plumbing market.

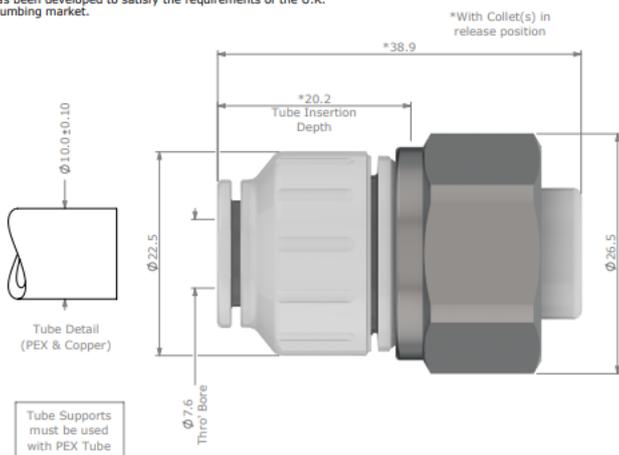


The John Guest 15mm - 1/2 BSP Straight Tap Connector has been developed to satisfy the requirements of the U.K. plumbing market.

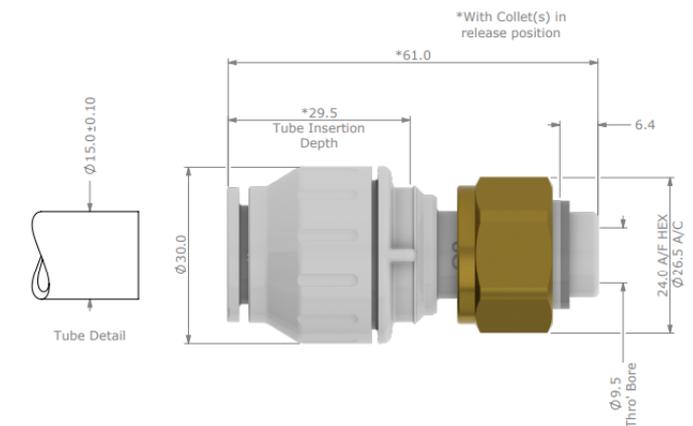

The John Guest 15mm - 3/4 BSP Straight Tap Connector has been developed to satisfy the requirements of the U.K. plumbing market.

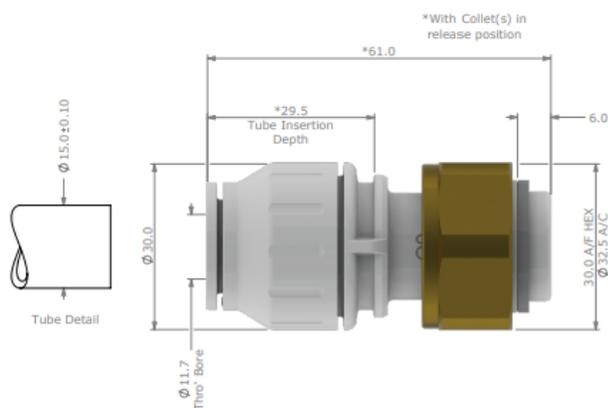

The John Guest 22mm - 3/4 BSP Straight Tap Connector has been developed to satisfy the requirements of the U.K. plumbing market.

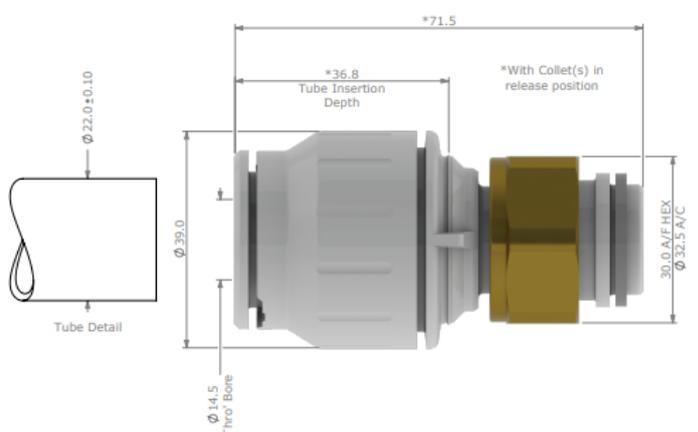

Dimensions in mm