



U1234 ? S J

LTE CAT4 Router TW214A

YOUR LINK TO THE WORLD WITH RELIABLE MOBILE LTE ROUTER







Your Link to The World With Reliable Mobile LTE Router

- Share your LTE internet connection with multiple devices at home to simultaneously work, stream, game, and more.
- Simply plug in a SIM/UICC card to connect to the Internet.
- Wi-Fi delivers faster speeds, greater capacity and reduced network congestion.
- 3 Gigabit Ethernet LAN port and 1 Gigabit Ethernet WAN port provide high speed wired connectivity.
- Ideal for home, SOHO, pop-up shops, smart classrooms.



Fast Speeds LTE and Wi-Fi technology to deliver faster speeds



Plug & Play Connect to 4G by simply inserting a SIM/UICC card



Gigabit Ports

Connect to smart TVs, game consoles, PCs and more for fast and reliable connections



Easy Setup

& Management

Set up your mesh Wi-Fi in minutes with app to effortlessly manage your home network




Versatility

4G mobile broadband and 1 Gbps WAN port provides flexible Internet connectivity to suit your needs



Secure Network

Keep your network safe with parental control, guest Wi-Fi, WPA2 encryption

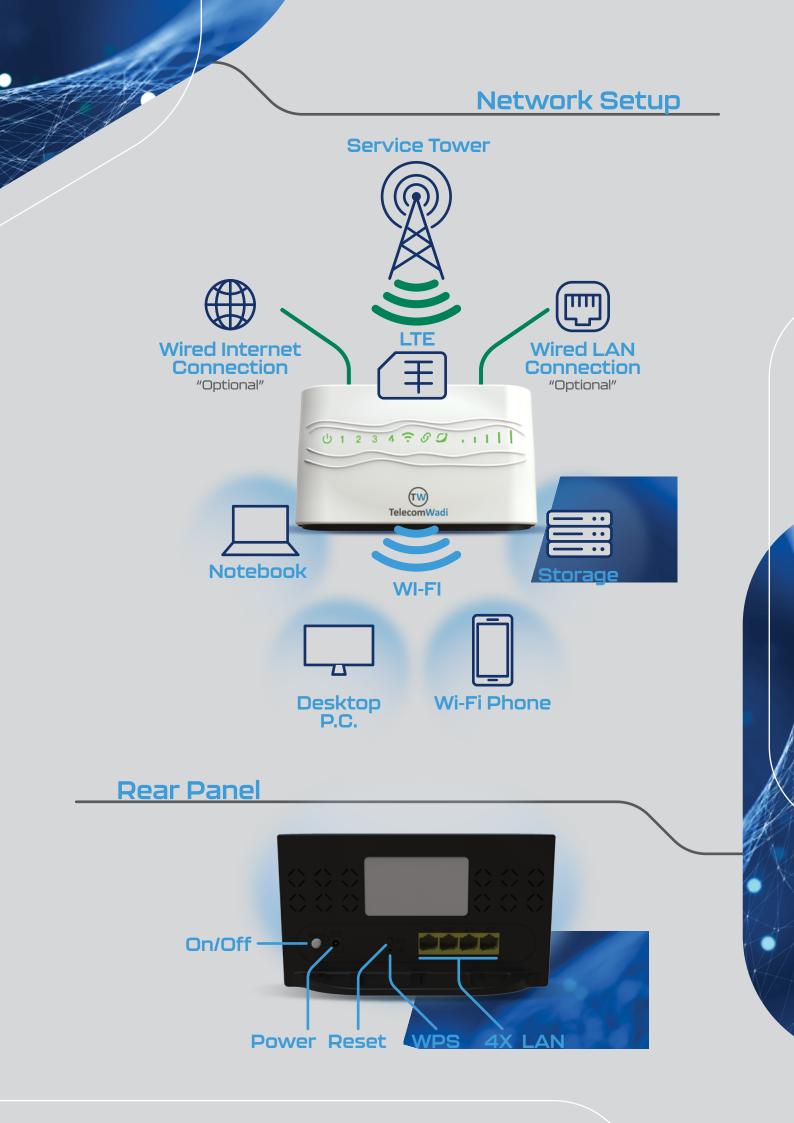

LTE CAT4 Router

General Specifications

Hardware Spec	cification		
LTE Module:	Simcom	Wi-Fi Chipsets:	Realtek
LTE Standard:	3GPP Release 16	Button:	ON/OFF, WPS, Reset
Transfer Rate			
LTE: Download: 150Mbps, Upload 50Mbps - Antenna: x4 Internal			
WI-FI Specification			
N300		Rate:	2.4GHz: 300Mbps
Antenna:	x2 Internal 2.4GHz	IEEE:	802.11 a/b/g/n
Physical Ports			
4*ETH RJ45 LAN Port 10/100/1000 Auto-Sensing1			
*SIM Card Holder			
Number of Concurrent Users:		32(32x2.4GHz) (MU-MIMO)	
IP Index-Dual Stack:			
Operation Mode:		Router/NAT/Bridge	
Support			
• TR69		Multi APN	
• SNMP • NAT Mode		 IP Routing SSH/Telnet 	
• SIM Lock		Port Forwarding	
• L2/L3 Firewall		• PPTP, L2TP VPN Client	
GRE Tunneling Web base Management-GUI			
Working Frequency			
4G: FDD-LTE: B1/B3/B5/B7/B8/B20/B28			
TDD-LTE: B38/B40/B41(2500-2690 MHz)			
3G: DC-HSPA+/HSPA/UMTS: B1/B8(1710-1866 MHz)			
Working Environment			
Operating Temperature: -35 °C to +75 °C Extended Temperature: -40 °C to +85 °C			
Case			
ABS Material, Plastic case			
Input Universal Range 100~240V AC, Output: 12V/1.0A D Power Consumption: <18W			
Headquarter Office			

Headquarter Office

Trivium Zayed-B228 First Al Sheikh Zayed, Giza Governorate , 3244530

Phone: +202 339 24752 +20 100 630 0842 E-Mail: contactus@telecomwadi.com Website: telecomwadi.com