

Catalogue



WTR 5000-006 Ratchet lashing strap



Technical data

- > short end 0.4 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,500 daN with straight tension
- > STF 300 daN with ratchet 811
- > with end fitting **006** (claw hook)
- > strap: 50 mm, red
- > pressure ratchet

Designation	Item number
Ratchet lashing strap WTR 5000 claw hook 006 SE 0.4 red quickview label	11811090060400L

WTE 5500-006 Ratchet lashing strap



Technical data

- > short end 0.4 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,500 daN with straight tension
- > STF 500 daN with ratchet 822
- > with end fitting **006** (claw hook)
- > strap: 50 mm, red
- > long-lever pull ratchet

Designation	Item number
Ratchet lashing strap WTE 5500 claw hook 006 SE 0.4 red quickview label	1500310L

WTL 5550-006 Ratchet lashing strap



Technical data

- > short end 0.5 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,500 daN with straight tension
- > STF 550 daN with ratchet 818
- > with end fitting **006** (claw hook)
- > strap: 50 mm, red
- > long-lever pull ratchet

Designation	item number
Ratchet lashing strap WTL 5550 claw hook 006 SE 0.5 red quickview label	1500714LQV

WTR 5000-006 Ratchet lashing strap



Technical data

- > long end – 7.6 m
long end – 9.6 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,500 daN with straight tension
- > with end fitting **006** (claw hook)
- > strap: 50 mm, red

Designation	Item number
Ratchet lashing strap WTR 5000 claw hook 006 LE 7.6 red quickview label	1500947LQV
Ratchet lashing strap WTR 5000 claw hook 006 LE 9.6 red quickview label	1500434LQV

WTR 5000-206 Ratchet lashing strap



Technical data

- > two-part – SE 0.4 m + LE 7.6 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,500 daN with straight tension
- > STF 300 daN
- > with end fitting **206** (claw hook with safety device)
- > strap: 50 mm, red
- > pressure ratchet

Designation	item number
Ratchet lashing strap WTR 5000 claw hook with retention 206 SE 0.4 + LE 7.6 red quickview label	11811092060476

WTR 5000-065 Ratchet lashing strap



Technical data

- > two-part – SE 0.4 m + LE 7.6 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,500 daN with straight tension
- > STF 300 daN
- > with end fitting **065** (claw hook)
- > strap: 50 mm, red
- > pressure ratchet

Designation	Item number
Ratchet lashing strap WTR 5000 claw hook 065 SE 0.4 + LE 7.6 red quickview label	11811090650476

WTR 5000-075 Ratchet lashing strap



Technical data

- > two-part – SE 0.4 m + LE 7.6 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,500 daN with straight tension
- > STF 300 daN
- > with end fitting **075** (triangle snap hook)
- > strap: 50 mm, red
- > pressure ratchet

Designation	Item number
Ratchet lashing strap WTR 5000 triangle snap hook 075 SE 0.4 + LE 7.6 red quickview label	11811090750476

WTR 5000-046 Ratchet lashing strap



Technical data

- > two-part – SE 0.4 m + LE 7.6 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,500 daN with straight tension
- > STF 300 daN
- > with end fitting **046** (cropped claw hook for crown outer frame)
- > strap: 50 mm, red
- > pressure ratchet

Designation	Item number
Ratchet lashing strap WTR 5000 claw hook 046 SE 0.4 + LE 7.6 red 5%	1504441L

WTE 5500-206 Ratchet lashing strap



Technical data

- > two-part – SE 0.4 m + LE 7.6 m
- > two-part – SE 0.4 m + LE 9.6 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,500 daN with straight tension
- > STF 500 daN with ratchet 822
- > with end fitting **206** (claw hook with safety device)
- > strap: 50 mm, red
- > long-lever pull ratchet

Designation	Item number
Ratchet lashing strap WTE 5500 claw hook with retention 206 SE 0.4 + LE 7.6 red quickview label	1500524
Ratchet lashing strap WTE 5500 claw hook with retention 206 SE 0.4 + LE 9.6 red quickview label	1500553

WTL 5550-206 Ratchet lashing strap



Technical data

- > two-part – SE 0.5 m + LE 7.5 m / two-part – SE 0.5 m + LE 9.5 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,500 daN with straight tension, STF 550 daN ratchet 818
- > with end fitting **206** (claw hook with safety device)
- > strap: 50 mm, red
- > with imprint long end
- > long-lever pull ratchet

Designation	Item number
Ratchet lashing strap WTL 5550 claw hook with retention 206 SE 0.5 + LE 7.5 red quickview label	1258548
Ratchet lashing strap WTL 5550 claw hook with retention 206 SE 0.5 + LE 9.5 red quickview label	1502623

WTR 4000-006 Ratchet lashing strap



Technical data

- > two-part – SE 0.4 m + LE 7.6 m / two-part – SE 0.4 m + LE 9.6 m
- > according to EN 12195-2
- > with Quick-View-Label
- > LC 2,000 daN with straight tension, STF 300 daN
- > with end fitting **006** (claw hook)
- > strap: 50 mm, yellow
- > pressure ratchet

Designation	Item number
Ratchet lashing strap WTR 4000 claw hook 006 SE 0.4 + LE 7.6 yellow quickview label	11811060060476L
Ratchet lashing strap WTR 4000 claw hook 006 SE 0.4 + LE 9.6 yellow quickview label	11811060060496L

WTR 2000-520 Ratchet lashing strap



Technical data

- > two-part – SE 0.5 m + LE 3.5 m / two-part – SE 0.5 m + LE 5.5 m / two-part – SE 0.5 m + LE 7.5 m
- > according to EN 12195-2
- > LC 1,000 daN with straight tension, STF 240 daN
- > with end fitting **520** (claw hook)
- > strap: 35 mm, orange
- > pressure ratchet

Designation	item number
Ratchet lashing strap WTR 2000 claw hook 520 SE 0.5 + LE 3.5 orange	1350605
Ratchet lashing strap WTR 2000 claw hook 520 SE 0.5 + LE 5.5 orange	1350607
Ratchet lashing strap WTR 2000 claw hook 520 SE 0.5 + LE 7.5 orange	1350609

WTR 2000 Ratchet lashing strap



Technical data

- > single-part – 3.0 m / 5.0 m / 8.0 m
- > according to EN 12195-2
- > lashing capacity LC 2000 daN in strapping
- > STF 480 daN
- > strap: 35 mm, orange
- > pressure ratchet

Designation	Item number
Ratchet lashing strap WTR 2000 single-part 3.0 orange	1350995
Ratchet lashing strap WTR 2000 single-part 5.0 orange	1350997
Ratchet lashing strap WTR 2000 single-part 8.0 orange	1351000

WTR 2200-520 Ratchet lashing strap




Technical data

- > two-part – SE 0.5 m + LE 5.5 m
- > two-part – SE 0.5 m + LE 7.5 m
- > according to EN 12195-2
- > LC 1,000 daN with straight tension
- > STF 200 daN
- > with end fitting **520** (claw hook)
- > strap: 35 mm, orange
- > pressure ratchet

Designation	Item number
Ratchet lashing strap WTR 2200 claw hook 520 SE 0.5 + LE 5.5 orange	1353004
Ratchet lashing strap WTR 2200 claw hook 520 SE 0.5 + LE 7.5 orange	1353005L

Wheel chock

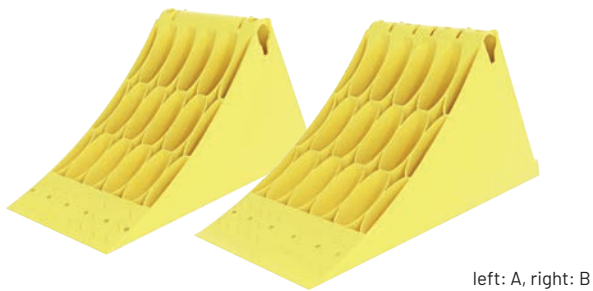

Technical data

- > suitable for tractor units, semi-trailers, trucks and trailers
- > material: plastic PP (recyclable)
- > colour: yellow
- > UV- and weather-resistant between -30°C and +50°C
- > central handle for easy handling
- > maximum tyre radius A: 460 mm
- > maximum tyre radius B: 555 mm
- > weight A: 0.75 kg
- > weight B: 1.19 kg

Designation	Item number
Wheel chock size 53	393001
Wheel chock size 46	393002

Wheel chock holder, round, galvanized with screw




Technical data

- > length: 250 mm
- > diameter: 21 mm
- > weight: 0.52 kg

Designation	Item number
Chock holder galvanised with screw	393006

Hot galvanized chock holder

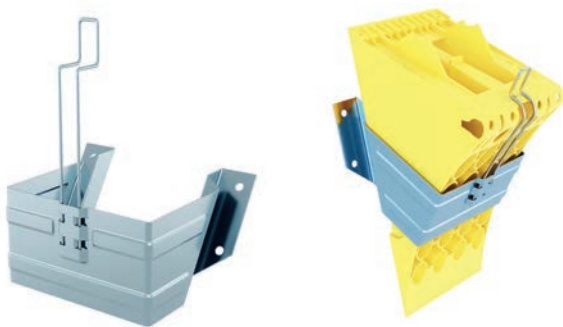

Technical data

- > bracket with retaining spring for wheel chock #393001, #393002
- > material: Sheet steel, hot-dip galvanized
- > L x W x H small: 166 x 120 x 174 mm
- > L x W x H big: 207 x 162 x 231 mm

Designation	Item number
Chock holder hot-dip galvanised for size 53	393008
Chock holder hot-dip galvanised for size 46	393007

FIX STRAP – simplifies the use of lashing straps



Simple but ingenious solution

With the "FIX STRAP" load securing system, the lashing strap hangs on rails directly under the roof of the semi-trailer with the aid of rubber ropes. The hook on one side is pulled down and fixed to a lashing point. Thanks to the rubber rope, the hook remains fixed. After loading, the lashing strap is pulled over the cargo, just like a normal lashing strap. During unloading, the ratchet is opened and the rubber ropes pull the lashing strap under the ceiling of the hold. This makes unloading and loading easier.

Since the rubber ropes with holders run on rails on the roof of the semi-trailer, you can simply pull the lashing strap to where it is needed.



Rated best in regard to work safety*



8 loads per week gives a payback period of 5 weeks



Meets the loading requirements of the EU

*HSE Health and Safety Executive, UK

Advantages:

- climbing onto the loading area and cargo to apply a lashing strap is avoided
- throwing of lashing straps over the cargo is avoided
- time saving during loading and unloading due to flexible positioning of the system on the rails
- simple and safe
- FIX STRAP uses the same suspension system as the FIX ROAD load securing system, making it easy to switch.

Available as a set

Designation	Item number
Belt lift system SET 14.4 m 12 bungees	160400
Belt lift system SET 7.2 m 6 bungees	160401
Belt lift system SET for fixed installation for 1 belt	160402

Accessories / spare parts

Designation	Item number
FIX-Mini 0,4 x 2,8 m	160200
FIX-Bungee Fixed sys. d19/375 colour 8 mm	160211
FIX-Slide	160220
FIX-Bungee sys. d19/375 colour 8 mm	160210

FIX ROAD



The easy way of securing cargo

There is a simple solution with which you can avoid the time-consuming and often complicated securing of cargo. "FIX ROAD" is a cargo securing system that is quick, safe and easy to use. "FIX ROAD" consists of a hard-wearing tarpaulin, which is attached beneath the roof of the semi-trailer with rubber ropes. The tarpaulin, which runs on rails, can be quickly and easily pulled over the cargo. There is no longer any need to climb onto the cargo to attach straps and edge protection. The tarpaulin covers the transported goods evenly and is then tensioned with the aid of integrated lashing straps.

In accordance with EU Directives

"FIX ROAD" is not only user-friendly, it also protects the cargo. It is suitable for securing most types of goods, from rolls, pallets, bales, web and sheet goods to sacks and octabins. "FIX ROAD" makes securing the cargo easier, especially for bulky and cargo of different sizes. Because the tarpaulin is attached to the roof, the semi-trailer is ready for loading at all times. "FIX ROAD" complies with the applicable EU safety guidelines (VDI 2700 / cargo securing on road vehicles and DIN standards EN 12195-2 / lashing straps made of synthetic

fibres). The "FIX ROAD" tarpaulin has woven reinforcements and hemmed-in safety straps. It has a permissible LC of 2,500 daN.

With "FIX ROAD", you no longer need to climb onto the cargo to secure it. The tarpaulin can be easily and quickly pulled over the cargo. After all, it only weighs just over 40 kg. Bulky cargo can be secured quickly and easily with the "FIX ROAD" tarpaulin because it covers the cargo evenly. Time-consuming considerations on how to secure the transported goods are not necessary. With "FIX ROAD", the lashing straps are simply tensioned downwards into the lashing points on the bed.



Many advantages

- › quick and easy to use
- › soft and easily mouldable, even in cold and rough weather
- › hard-wearing material with UV protection
- › does not damage the goods
- › protects against rain and dirt
- › makes edge protection superfluous
- › low weight (a medium-sized tarpaulin weighs about 40 kg)
- › long service life even under difficult conditions
- › advertising material can be printed or sewn on
- › saves time when securing the cargo
- › fits different types of goods
- › enables a longer and/or wider protective tarpaulin (for better protection against e.g. rain)
- › DEKRA-approved



patented



tested and approved
by DEKRA



high sustainability
and long lifespan



WTR 1500-826 Ratchet lashing strap



Technical data

- > two-part – SE 1.0 m + LE 4.0 m
- > according to EN 12195-2
- > LC 750 daN with straight tension
- > STF 210 daN
- > with end fitting **826** (for combi and anchor combi lashing tracks)
- > strap: 50 mm, green

Designation	Item number
Ratchet lashing strap WTR 1500 fitting 826 for anchor tracks SE 1.0 + LE 4.0 green	1504273
Ratchet lashing strap WTR 1500 fitting 826 for anchor tracks SE 0.5 + LE 4.5 green	1504252

WTR 1500-828 Ratchet lashing strap




Technical data

- > two-part – SE 0.5 m + LE 4.5 m
- > according to EN 12195-2
- > LC 750 daN with straight tension
- > STF 210 daN
- > with end fitting **828** (for keyhole lashing tracks)
- > strap: 50 mm, green

Designation	Item number
Ratchet lashing strap WTR 1500 fitting 828 for keyhole tracks SE 0.5 + LE 4.5 green	1504370

WTK 1000-826 cam buckle strap

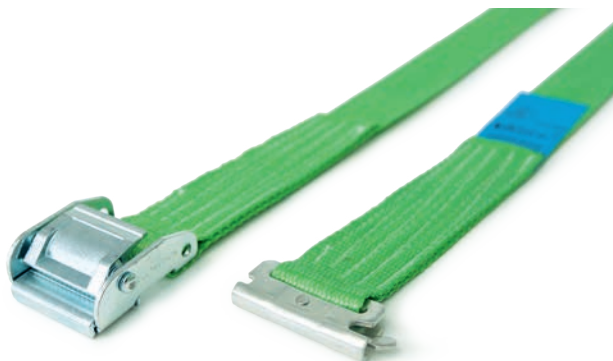

Technical data

- > two-part – SE 1.0 m + LE 4.0 m
- > according to EN 12195-2
- > LC 500 daN with straight tension
- > with end fitting **826** (for combi and anchor combi lashing tracks)
- > strap: 50 mm, green

Designation	Item number
Cam buckle strap WTK 1000 fitting 826 for anchor tracks SE 1.0 + LE 4.0 green	1503826

WTK 1000-828 cam buckle strap



Technical data

- two-part – SE 1.5 m + LE 2.5 m
- according to EN 12195-2
- LC 500 daN with straight tension
- with end fitting **828** (for keyhole lashing tracks)
- strap: 50 mm, blue

Designation	Item number
Cam buckle strap 1000 fitting 828 for keyhole tracks SE 1.5 + LE 2.5 blue	1501346

WTR 1000 Ratchet lashing strap



Technical data

- > two-part – SE 0.5 m + LE 4.5 m
- > according to EN 12195-2
- > LC 500 daN with straight tension
- > STF 200 daN
- > strap: 25 mm, red

with end fitting **002** (claw hook)

Designation	Item number
Ratchet lashing strap WTR 1000 claw hook 002 SE 0.5 + LE 4.5 red	1255107



with end fitting **025** (flat hook with safety mechanism)

Designation	Item number
Ratchet lashing strap WTR 1000 flat hook 025 SE 0.5 + LE 4.5 red	1255216



with end fitting **379** (single airline fitting)

Designation	Item number
Ratchet lashing strap WTR 1000 airline fitting 379 SE 0.5 + LE 4.5 red	11909023790545

WTR 1000 Ratchet lashing strap



Technical data

- > two-part – SE 0.2 m + LE 0.73 m / SE 0.2 m + LE 3.2 m
- > according to EN 12195-2
- > LC 500 daN with straight tension
- > STF 200 daN
- > strap: 25 mm, signal blue
- > The long end is connected to the short end by a safety seam.

with end fitting **382** (single airline fitting)

Designation	Item number
Ratchet lashing strap WTR 1000 airline fitting 379 SE 0.2 + LE 0.73 blue with securing seam	1251286



with end fitting **201** (flat hook)

Designation	Item number
Ratchet lashing strap WTR 1000 flat hook 201 SE 0.2 + LE 0.8 blue with securing seam	1250678



with end fitting **025** (flat hook with safety mechanism)

Designation	Item number
Ratchet lashing strap WTR 1000 flat hook 025 SE 0.3 + LE 3.2 blue with securing seam	1251293

WTR 800 Ratchet lashing strap



Technical data

- two-part – SE 0.5 m + LE 4.5 m
- according to EN 12195-2
- LC 400 daN with straight tension
- STF 200 daN
- strap: 25 mm, grey, yellow

with end fitting **202** (stainless steel snap hook)

Designation	Item number
Ratchet lashing strap WTR 800 snap hook stainless steel 201 SE 0.5 + LE 4,5 grey	1250990




with end fitting **202** (snap hook)

Bezeichnung	Artikelnummer
Ratchet lashing strap WTR 800 snap hook stainless steel 201 SE 0.2 + LE 1.8 blue	1250812



with end fitting **002** (claw hook)

Designation	Item number
Ratchet lashing strap WTR 800 claw hook 002 SE 0.5 + LE 4.5 yellow	1257988

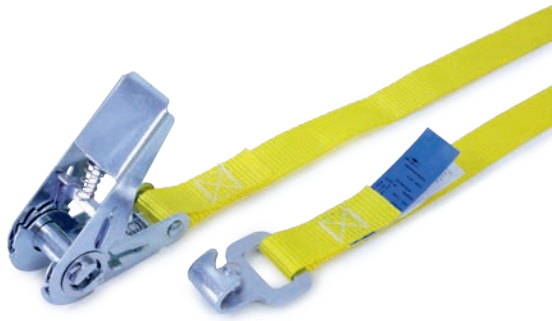


with end fitting **025** (flat hook with safety mechanism)

Designation	Item number
Ratchet lashing strap WTR 800 flat hook 025 SE 0.5 + LE 4.5 yellow	11906030250545



with end fitting **379** (single airline fitting)


Designation	Item number
Ratchet lashing strap WTR 800 airline fitting 379 SE 0.5 + LE 4.5 yellow	1258794

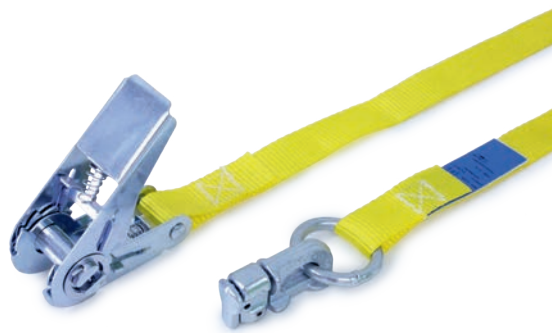

with end fitting **381** (double airline fitting)

Designation	Item number
Ratchet lashing strap WTR 800 double airline fitting 381 SE 0.5 + LE 4.5 yellow	1258052

WTR 800 Pressure ratchet lashing strap

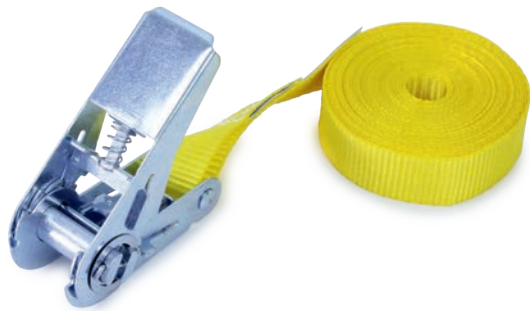

Technical data

- > single-part – 3.0 m / 5.0 m
- > according to EN 12195-2
- > lashing capacity LC 800 daN in strapping
- > strap: 25 mm, yellow

Designation	Item number
Ratchet lashing strap WTR 800 single-part 3.0 yellow	1259473
Ratchet lashing strap WTR 800 single-part 5.0 yellow	1259475

WTR 1500-826 Ratchet lashing strap



Technische Daten

- > two-part – FE 0,5
- > according to EN 12195-2
- > LC 750 daN with straight tension
- > STF 210 daN
- > with end fitting **826** (for Combi and Anchor Combi lashing rails)
- > strap: 50 mm, green

Bezeichnung	Artikelnummer
Ratchet lashing strap WTR 1500 fitting 826 for anchor tracks SE 0.2 + LE 0.8 green with securing seam	1500533
Ratchet lashing strap WTR 1500 fitting 826 for anchor tracks SE 0.2 + LE 1.8 green	1504226
Ratchet lashing strap WTR 1500 fitting 826 for anchor tracks SE 0.5 + 2.5 green	1504250
Ratchet lashing strap WTR 1500 fitting 826 for anchor tracks SE 0.5 + LE 4.5 green	1504252

* SN = securing seam (fixed and loose ends can not be separated) – e.g. for gas bottle holder

WTK 350 cam buckle strap



Technical data

- > single-part – 3.0 m / 5.0 m
- > according to EN 12195-2
- > LC 350 daN in strapping
- > strap: 25 mm, yellow

Designation	Item number
Cam buckle strap WTK 350 single-part 3.0 yellow	1253673
Cam buckle strap WTK 350 single-part 5.0 yellow	1253675

WTW 250 Automatic ratchet lashing strap



Technical data

- > two-part – SE 0.2 m + LE 2.0 m
- > based on EN 12195-2
- > LC 125 daN with straight tension
- > STF 27 daN
- > strap: 25 mm, black

with end fitting **002** (claw hook)

Designation	Item number
Automatic ratchet lashing strap 250 claw hook 002 SE 0.2 + LE 2.0 black automatic ratchet lashing strap	1250337



with end fitting **025** (flat hook with safety mechanism)

Designation	Item number
Automatic ratchet lashing strap 250 flat hook 025 SE 0.2 + LE 2.0 black automatic ratchet lashing strap	1250293



with end fitting **382** (single airline fitting)

Designation	Item number
Automatic ratchet lashing strap 250 airline fitting 379 SE 0.2 + LE 2.0 black automatic ratchet lashing strap	1250346



with end fitting **725** (S-hook with PVC cover)

Designation	Item number
Automatic ratchet lashing strap 250 S-hook 725 SE 0.2 + LE 2.0 black automatic ratchet lashing strap	1250150

Safeguard cargo securing nets



We offer a wide range of applications – even beyond the realms of cargo securing. The common lashing strap widths 25 mm, 35 mm and 50 mm and the different mesh apertures in combination with connection adapters for the vehicle or trailer, offer a variety of options.

We could implement more than 300 different versions for our customers up to now. The Safeguard cargo securing nets are planned and manufactured according to customer requirements.

Besides many individual products, customer-specific solutions have proven invaluable and have been manufactured more than 10,000 times.

Key application areas include:

- rear cargo securing in closed bodies, the various swap bodies, containers and special containers
- lateral cargo securing, e.g. for curtainsiders
- cargo securing over the cargo on the floor and to the sides
- retention nets for short timber transports
- restraining nets for transporters
- tie-down lashing cargo securing nets

Production, marking and testing are carried out in accordance with VDI Guideline 2700 Sheet 3.3 (and in accordance with DIN EN 12195-2).



Cargo securing for transporters and trailers



This results in a multitude of design possibilities, which are to be determined on the basis of years of experience and on the basis of the customer's requirements specification.

The following key data must be taken into account:

- use, handling and load data
- mesh size and fabric insert
- quantity and kind of tensioning and connecting elements
- use of linkages
- use of additional anti-theft devices

Safeguard load securing nets are manufactured for renowned customers like Deutsche Post, GLS, Hermes and many others, and have proven their practical worth across Europe.

In this catalogue, you will find a selection of net options. Please contact us if these do not meet your requirements. The team is at your disposal with its many years of experience and also produces nets individually in quantities from 1 piece.



"QuickKEP" cargo securing net



Technical data

- › vertical transporter cargo securing net
- › strap width: 25 mm
- › strap colour: red
- › with alum. linkage on both sides for securing in wheelhouse area
- › 2 mounting levels for hanging up
- › LC net mounting point 250 daN
- › LC net total 600 daN
- › mesh check, production and marking according to VDI guideline 2700 Part 3.3
- › net height approx. 1,700 mm
- › weight net: approx. 6.8 kg
- › weight fitting 380 total: approx. 1.8 kg
- › bottom hook extended for simple insertion
- › spanner in label protector for adjusting the height for optimised fastening
- › available for MB Sprinter, VW Crafter, Renault Trafic, Ford Transit, Hyundai H50, Opel Movano, Iveco Daily, MAN TGE, Fiat Ducato, Peugeot Boxer, Citroën Jumper

Side mounting

- › WIS hook-in device for double airline fitting 380
- › 16 double airline fittings are already included in the set



"QuickKEP 2.0" cargo securing net



Technical data


- > vertical transporter cargo securing net
- > strap width: 25 mm
- > strap colour: red
- > with straight alum. linkage on both sides for universal use in H2 chassis
- > 2 mounting levels for hanging up
- > LC net mounting point 250 daN
- > LC net total 600 daN
- > mesh check, production and marking according to VDI guideline 2700 Part 3.3
- > net height: 1,668 mm
- > weight net: approx. 6.8 kg
- > weight fitting 380 total: approx. 1.8 kg
- > bottom hook extended for simple insertion
- > spanner in label protector for adjusting the height for optimised fastening
- > four quick-release fasteners

Side mounting


- > WIS hook-in device for double airline fitting 380
- > 16 double airline fittings are already included in the set

Packaged as set for universal use

Designation	Item number
Safeguard cargo securing net QuickKEP	273480002230

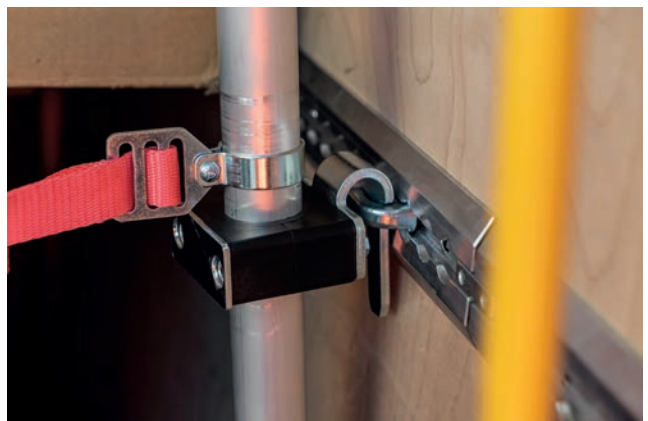

"QuickKEP" dimensions

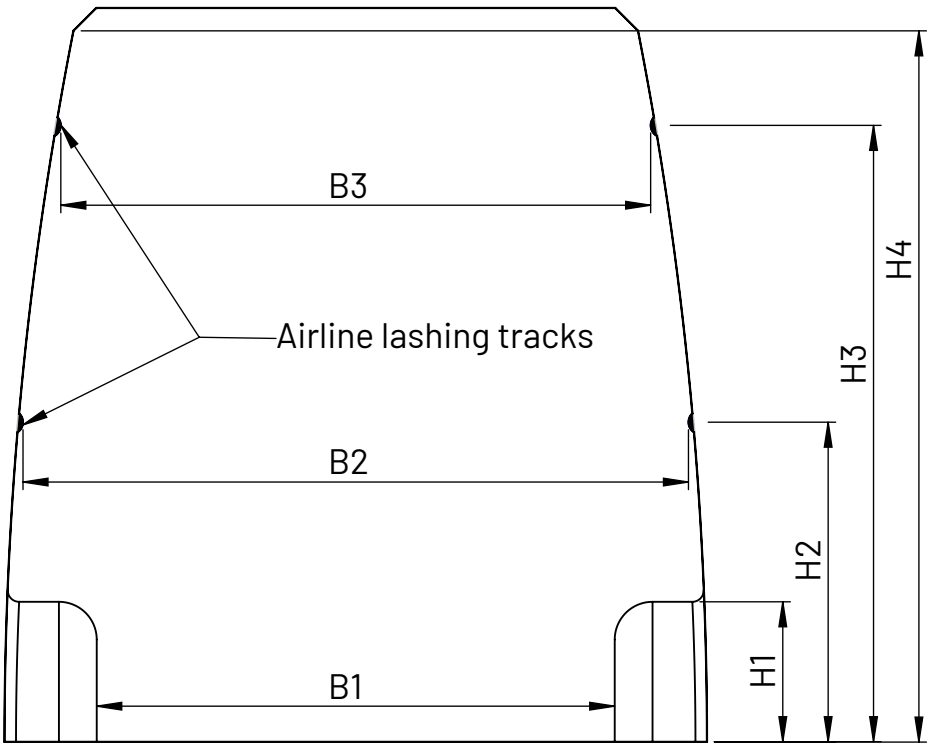

company	
vehicle manufacturer	
vehicle model	
H1	
B1	
H2	
B2	
B3	
H3	
H4	

"QuickMED" medium cargo securing net



Technical data


- suitable for Citroën Jumpy, Fiat Talento, Ford Transit Connect, MB Vito, Opel Vivaro, Renault Trafic, VW T5 / T6, as well as other models
- vertical pickup truck load safety net
- is locked by spring pressure on the bottom pin in the hooking device
- strap width: 25 mm
- with aluminum rods both sides
- 2 mounting levels for hanging up
- LC net mounting point 250 daN
- LC net total 600 daN
- mesh check, production and marking according to VDI guideline 2700 Part 3.3
- net height approx. 1,200 mm
- weight net: approx. 4.8 kg
- weight fitting 380 total: approx. 900 g

Side mounting

- WIS hook-in device for double airline fitting 380
- 8 double airline fittings are already included in the set

Packed as a set

Designation	Item number
Safeguard cargo securing net QuickMed Mercedes Vito	274290000100

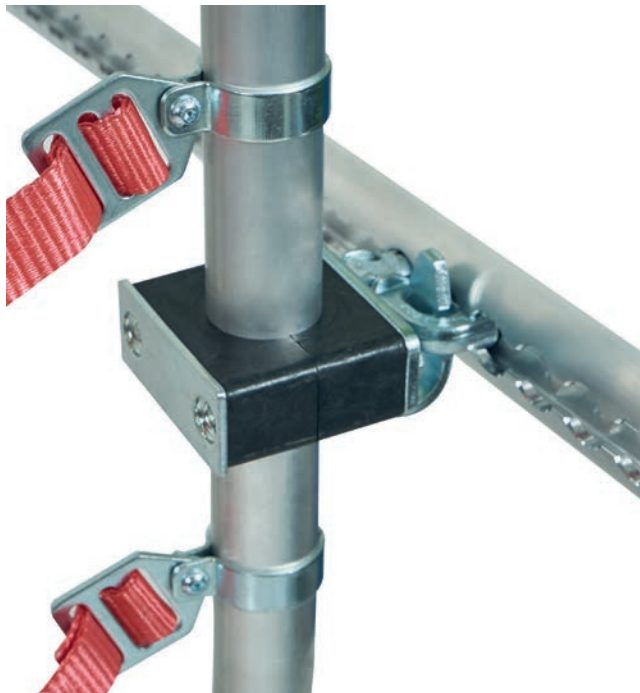

"QuickMED" small cargo securing net



Technical data

- suitable for Citroën Berlingo, Fiat Doblo, Ford Transit Courier, MB Citan, Opel Combo, Renault Kango, VW Caddy, as well as other models
- vertical pickup truck load safety net
- is locked by spring pressure on the bottom pin in the hooking device
- strap width: 25 mm
- with aluminum rods both sides
- 2 mounting levels for hanging up
- LC net mounting point 250 daN
- LC net total 600 daN
- mesh check, production and marking according to VDI guideline 2700 Part 3.3
- net height approx. 1,080 mm
- weight net: approx. 4,3 kg
- weight fitting 380 total: approx. 900 g

Side mounting


- WIS hook-in device for double airline fitting 380
- 8 double airline fittings are already included in the set

Packed as a set

Designation	Item number
Safeguard cargo securing net QuickSmall Citroen Berlingo	274290000200



"QuickMED" medium und small dimensions

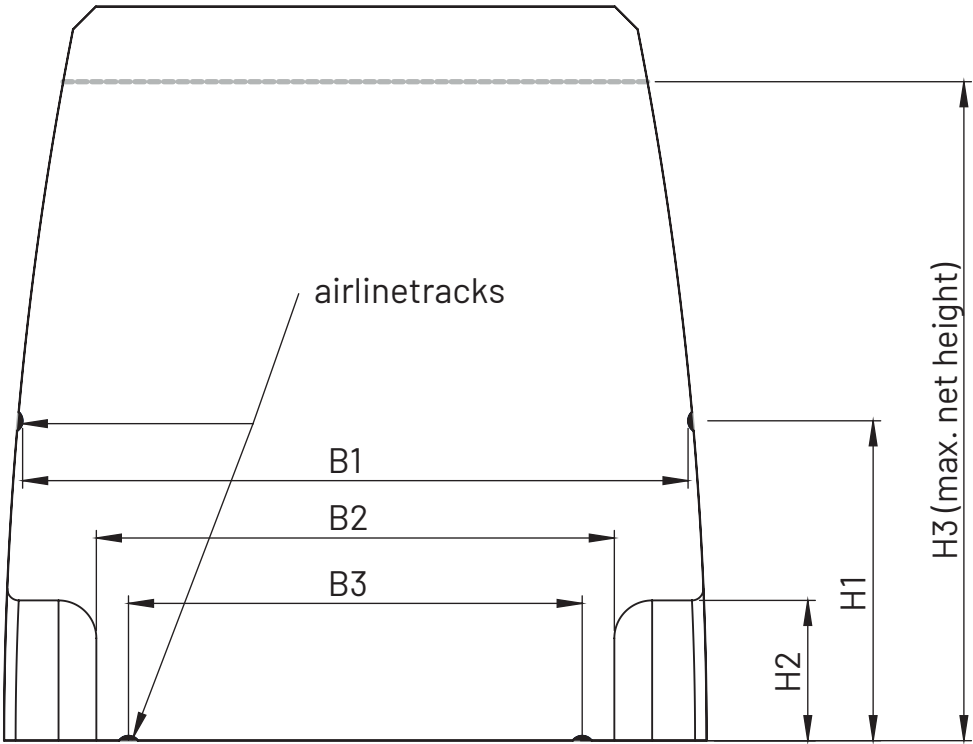

company	
vehicle manufacturer	
vehicle model	
H1	
B1	
H2	
B2	
H3	
B3	

Cargo securing net "4 levels"



Technical data

- > for MB Sprinter / VW Crafter Height 2
- > vertical transport net
- > strap width: 25 mm
- > strap colour: red
- > mesh size approx. 175 x 175 mm.
- > 4 mounting levels
- > width approx. 1,450/1,700 mm x height approx. 1,700 mm
- > LC net mounting point 200 daN
- > LC net total 400 daN
- > mesh check, production and marking according to VDI guideline 2700 Part 3.3
- > net height approx. 1,800 mm

The following end fittings are included per box:

- > 8 x end fitting 382 for airline lashing tracks
- > 8 x end fitting 025 for track with pinss


Side mounting

- > on both sides by means of attached clamp lock
- > four mounting levels measured from the floor approx.
50 mm / 700 mm / 1,540 mm / 1,800 mm
- > net width
 - mounting level with approx. 50 mm: approx. 1,600 mm,
 - mounting level with approx. 700 mm: approx. 1,600 mm
 - mounting level with approx. 1,540 mm: approx. 1,400 mm
 - mounting level with approx. 1,800 mm: 1,350 mm

Packed as a set

Designation	Item number
Safeguard cargo securing net 25 Crafter/Sprinter 4 levels	271350000008

Alcove netting

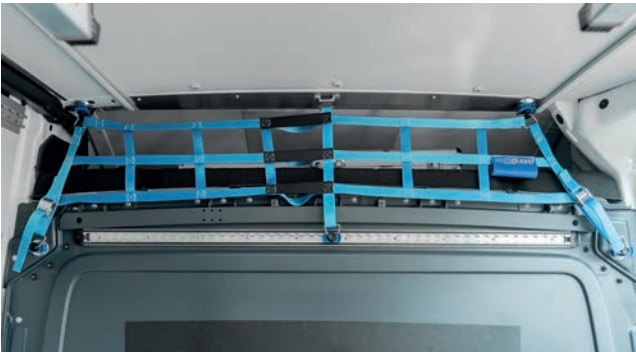

Technical data

- > load securing net for the storage space above the cab
- > adapted to the contour of the MB Sprinter - Hight 2
- > strap width: 25 mm
- > strap colour: blau
- > LC net mounting point 200 daN
- > LC net total 150 daN
- > mesh check, production and marking according to VDI guideline 2700 Part 3.3
- > net height approx. 215 mm
- > weight net: 900 g
- > attachment with 5x fitting 382 and hook 213
- > 5x round airline attachment points, 1x flat hook as well as 1x hooks and clamps are included in the set

Packed as a set

Designation	Item number
Safeguard Ladungssicherungsnetz Alkoven Sprinter Set	2743101

Cargo securing net for tie-down lashing with ratchets



Technical data

- > size: 1,575 x 1,350 mm
- > mesh size: 200 x 200 mm
- > strap width: 25 mm wide
- > strap colour: red
- > 14 D-rings 703 are sewn circumferentially around the net
- > additionally 4 end fittings 025 on each of the short sides
- > including 4 fastening straps WTR 1000 single-part 4.0 m red
- > including 4 freewheeling standard claw hooks 002
- > mesh check, production and marking according to VDI guideline 2700 Part 3.3
- > LC net mounting point 500 daN
- > LC net total 800 daN

Packed as a set

Designation	Item number
Safeguard cargo securing net 1,575 x 1,350 mesh width 200	272130000000

Cargo securing net for low tensioning with cam buckles



Technical data


- > size: 1,375 x 1,225 mm
- > mesh size: 125 x 125 mm
- > strap width: 25 mm
- > strap colour: blue
- > 1 end fitting 025 at each corner
- > additionally 4 end fittings 025 tapering inwards inside net
- > for adaptation with cam buckle 605 and long end with end fitting 025 length 1.0 m
- > cam buckles and long ends are included in the net
- > mesh check, production and marking according to VDI guideline 2700 Part 3.3
- > LC net mounting point 340 daN
- > LC net total 480 daN

Packed as a set

Designation	Item number
Safeguard cargo securing net 1,375 x 1,225 mesh width 125	272220000001

Cargo securing net for tensioning down


1

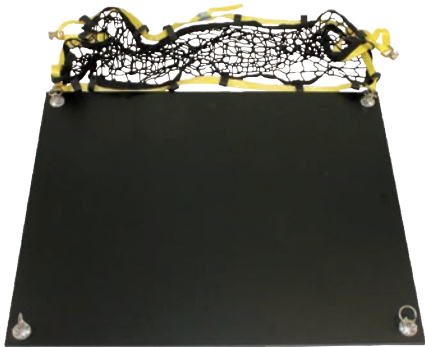

2



3

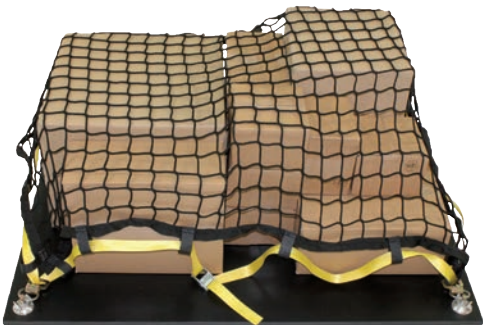

4



Technical data

- Consisting of:
- > 1 x cargo securing net
basis of VDI 2700 Part 3.3
material: knitted yarn
material thickness: 3 mm
mesh size approx. 45 mm.
maximum mesh tensile force: approx. 1,250 N
yarn colour: black
all around with edging tape in black
and 36 strap loops
 - > 1 x WTK 500 single-part 7,800 mm yellow
 - > 4 x end fitting **002** (claw hook) / **725** (S-hook with PVC cover) / **201** (flat snap hook) / **025** (flat hook with safety mechanism) / **382** (single airline fitting)
 - > LC net total: 400 daN
 - > LC net mounting point: 350 daN
 - > packaging: bagged with sticker
- > size: 1,290 x 730 mm



Designation	Item number
Safeguard cargo securing net 1,250 x 730 knitted WTK claw hook 002 yellow	272830002210
Safeguard cargo securing net 1,250 x 730 knitted WTK S-hook 725 yellow	272830725210
Safeguard cargo securing net 1,250 x 730 knitted WTK flat snap hook 201 yellow	272830201210
Safeguard cargo securing net 1,250 x 730 knitted WTK flat hook 025 yellow	272830025210
Safeguard cargo securing net 1,250 x 730 knitted WTK airline fitting 382 yellow	272830382210

- > size: 2,290 x 1,500 mm

Designation	Item number
Safeguard cargo securing net 2,290 x 1,500 knitted WTK claw hook 002 yellow	272940002210
Safeguard cargo securing net 2,290 x 1,500 knitted WTK S-hook 725 yellow	272940725210
Safeguard cargo securing net 2,290 x 1,500 knitted WTK flat snap hook 201 yellow	272940201210
Safeguard cargo securing net 2,290 x 1,500 knitted WTK flat hook 025 yellow	272940025210
Safeguard cargo securing net 2,290 x 1,500 knitted WTK airline fitting 382 yellow	272940382210



WheelNet

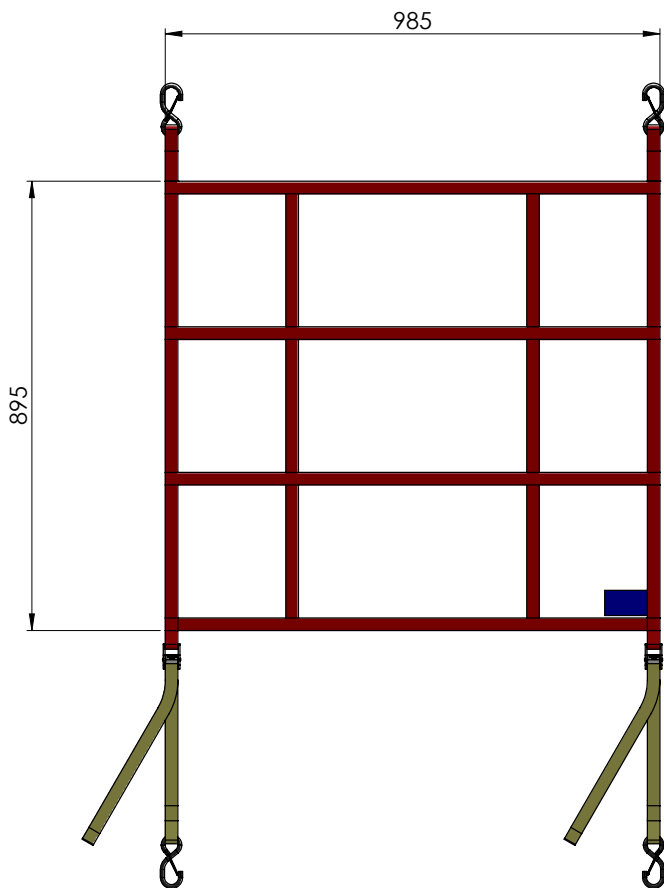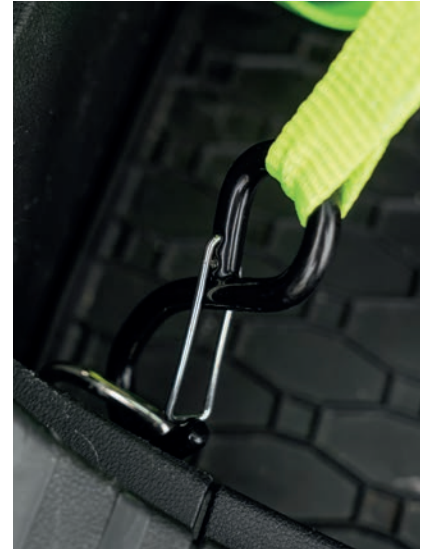

Technical data

- size: 985 x 895 mm
- strap width: 25 mm
- strap colour: rot
- 4 x S-hook (with PVC cover) with safety clip
- 2 x cam buckle 25 mm
- Cam buckles and yellow webbing will be fixed at the end of the vehicle and can be tighten.

Designation

Safeguard wheel net for trunk

Item number

274300000000

Covering nets



Technical data

- > cover net made of PPM knotless
- > according to VDI 2700, sheet 3.3
- > mesh size: 30 x 30 mm
- > material thickness: 2 mm
- > net colour: green
- > with edge hem and circumferential rubber rope

Designation	Item number
Covering net with 6 mm rubber cord around edge 2 mm MW 30 1.8 x 3.3 m	275200313318
Covering net with 6 mm rubber cord around edge 2 mm MW 30 2.0 x 3.0 m	275200312030
Covering net with 6 mm rubber cord around edge 2 mm MW 30 2.0 x 3.5 m	275200312035
Covering net with 6 mm rubber cord around edge 2 mm MW 30 2.5 x 3.5 m	275200313525
Covering net with 6 mm rubber cord around edge 2 mm MW 30 2.5 x 4.5 m	275200314525
Covering net with 6 mm rubber cord around edge 2 mm MW 30 4.5 x 3.0 m	275200314530

- > cover net made of PPM knotless
- > according to VDI 2700, sheet 3.3
- > mesh size: 50 x 50 mm
- > material thickness: 3 mm
- > net colour: green
- > with edge hem and circumferential rubber rope

Designation	Item number
Covering net with 6 mm rubber cord around edge 3 mm MW 50 1.5 x 2.2 m	275300511522
Covering net with 6 mm rubber cord around edge 3 mm MW 50 1.5 x 2.5 m	275300511525
Covering net with 6 mm rubber cord around edge 3 mm MW 50 1.5 x 2.7 m	275300512715
Covering net with 6 mm rubber cord around edge 3 mm MW 50 2.0 x 3.0 m	275300512030
Covering net with 6 mm rubber cord around edge 3 mm MW 50 2.5 x 3.5 m	275300512535
Covering net with 6 mm rubber cord around edge 3 mm MW 50 2.5 x 4.5 m	275300514525
Covering net with 6 mm rubber cord around edge 3 mm MW 50 3.0 x 3.5 m	275300513035
Covering net with 6 mm rubber cord around edge 3 mm MW 50 3.0 x 4.0 m	275300513040
Covering net with 6 mm rubber cord around edge 3 mm MW 50 3.5 x 5.0 m	275300513550
Covering net with 6 mm rubber cord around edge 3 mm MW 50 3.5 x 5.5 m	275300515535
Covering net with 6 mm rubber cord around edge 3 mm MW 50 3.5 x 6.0 m	275300513560
Covering net with 6 mm rubber cord around edge 3 mm MW 50 3.5 x 7.0 m	275300513570
Covering net with 6 mm rubber cord around edge 3 mm MW 50 3.5 x 8.0 m	275300513580

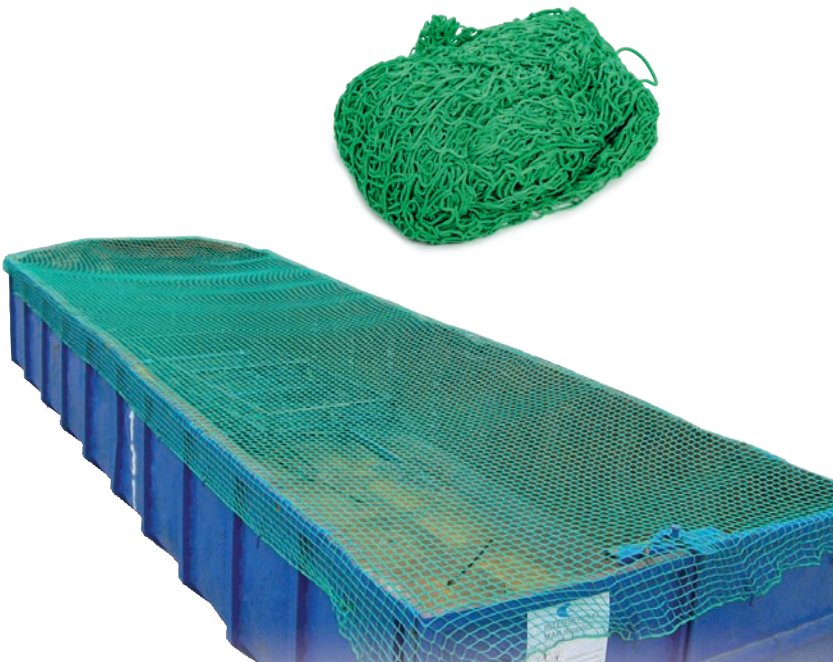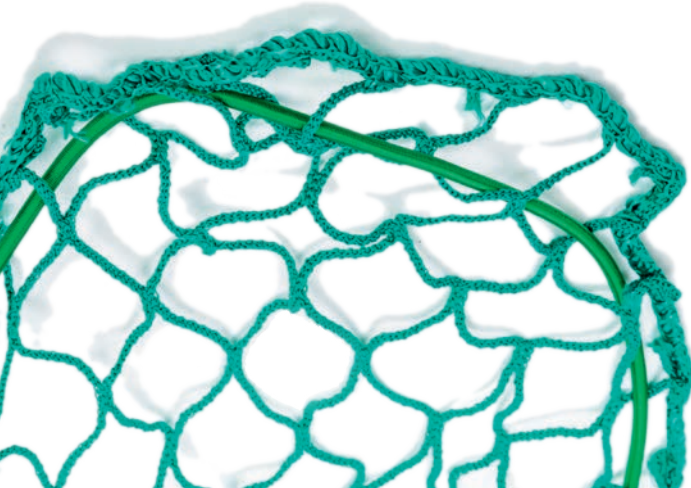



Top seller

Car transport lashing strap WTA 2908



Cargo securing for car transporters and trailers

Protection for long end




Type A50
Rubberised hose




Type B50
Fabric hose



Type D50
3 pieces abra-
sion blocks



Type E50
Controller with rub-
berised backside



Type E35
Controller with rub-
berised backside

Car transport lashing strap WTA 3821



Type A50

Technical data

- > according to EN 12195-2 elongation max. 4%
- > strap width 50 mm
- > LC 1,500 daN with straight tension
- > short end with end fitting **006** (claw hook)
- > free-running end fitting **006** (claw hook)
- > long end with end fitting **006** (claw hook)
- > strap colour: blue

Designation	Item number
Car transport belt WTA 3821A50 006 claw hook 006 claw hook 006 SE 0.2 + LE 2.8 blue 4%	1500380



Type B50

Designation	Item number
Car transport belt WTA 3821B50 006 claw hook 006 claw hook 006 SE 0.2 + LE 2.8 blue 4%	1503152



Type D50

Designation	Item number
Car transport belt WTA 3821D50 006 claw hook 006 claw hook 006 SE 0.2 + LE 2.5 blue 4%	11811050060225

Car transport lashing strap WTA 3821



Type E50

Technical data

- > according to EN 12195-2 elongation max. 4%
- > strap width 50 mm
- > LC 1,500 daN with straight tension
- > ratchet 821 with end fitting **353** (swivel hook)
- > free-running end fitting **014** (single finger claw hook)
- > long end with end fitting **014** (single finger claw hook)
- > strap colour: blue

Designation	Item number
Car transport belt WTA 3821E50 swivel hook 353 1-finger hook 014 1-finger hook 014 SE 2.3 blue 4%	1503184

Car transport lashing strap WTA 3921



Type E35

Technical data

- > according to EN 12195-2 elongation max. 4%
- > strap width 35 mm
- > LC 1,500 daN with straight tension
- > short end with end fitting **356** (swivel hook)
- > free-running end fitting **354** (swivel hook)
- > long end with end fitting **354** (swivel hook)
- > loose end with securing seam
- > strap colour: blue
- > label inside, with Quick-View-Label

Designation	Item number
Car transport belt WTA 3921E35 swivel hook 356 + 354 SE 2.8 blue 4%	1351023

Car transport lashing strap WTA 2917



Technical data

- > according to EN 12195-2
- > LC 1,000 daN with straight tension
- > short end with end-fitting **536** (single finger claw hook)
- > without free-running end fitting
- > long end with end fitting **536** (single finger claw hook)
- > without protective hose
- > strap colour: orange
- > including blue cross-strap (figure-eight loop)
- > both sides loop 100 mm – **tapered**
- > total length DP/DP 351 mm

Designation	Item number
Car transport belt WTA 2917035 1-finger claw hook 536 SE 0.2 + LE 2.5 blue	1357412

Car transport lashing strap WTA 2908



Technical data

- > according to EN 12195-2
- > LC 1000 daN with straight tension
- > SE with end fitting **356** (swivel hook) directly on the ratchet
- > long end with end fitting **015** (D-ring) and protective hose 400 mm
- > measured from the hook with a length of 500 mm, a fitted EB 536 (single-finger claw hook)
- > strap colour: blue

Designation	Item number
Car transport belt WTA 2921035 swivel hook 356 D-ring 015 SE 1.5	1351235L



Top seller

Hoisting strap



Other products

Lifting slings



Technical data

- > nominal load capacity: 1,000 kg
- > width: 30 mm
- > colour: violet
- > according to EN 1492-1
- > GS-tested

Designation	Item number
Lifting strap 1 t violet 2.0 m	620100203021
Lifting strap 1 t violet 4.0 m	620100403021
Lifting strap 1 t violet 6.0 m	620100603021



Technical data

- > nominal load capacity: 2,000 kg
- > width: 60 mm
- > colour: green
- > according to EN 1492-1
- > GS-tested

Designation	Item number
Lifting strap 2 t green 2.0 m	620100206021
Lifting strap 2 t green 4.0 m	620100406021
Lifting strap 2 t green 6.0 m	620100606021
Lifting strap 2 t green 8.0 m	620100806021



Technical data

- > nominal load capacity: 3,000 kg
- > width: 90 mm
- > colour: yellow
- > according to EN 1492-1
- > GS-tested

Designation	Item number
Lifting strap 3t yellow 2.0 m	620100209021
Lifting strap 3t yellow 4.0 m	620100409021
Lifting strap 3t yellow 6.0 m	620100609021

Lifting slings



Technical data

- > nominal load capacity: 4,000 kg
- > width: 120 mm
- > colour: grey
- > according to EN 1492-1
- > GS-tested

Designation	Item number
Lifting strap 4 t grey 2.0 m	620100212021
Lifting strap 4 t grey 4.0 m	620100412021
Lifting strap 4 t grey 6.0 m	620100612021



Technical data

- > nominal load capacity: 6,000 kg
- > width: 180 mm
- > colour: brown
- > according to EN 1492-1
- > GS-tested

Designation	Item number
Lifting strap 6 t brown 6.0 m	620100618021

Round slings



Technical data

- > nominal load capacity: 1,000 kg
- > useful length: 0.5 – 4.0 m
- > circumferential length: 1.0 – 8.0 m
- > colour: violet
- > according to EN 1492-2
- > GS-tested

Designation	Item number
Round sling 1 t violet 1.0 m circumference	610100100027
Round sling 1 t violet 2.0 m circumference	610100200027
Round sling 1 t violet 3.0 m circumference	610100300027
Round sling 1 t violet 4.0 m circumference	610100400027
Round sling 1 t violet 5.0 m circumference	610100500027
Round sling 1 t violet 6.0 m circumference	610100600027
Round sling 1 t violet 8.0 m circumference	610100800027



Technical data

- > nominal load capacity: 2,000 kg
- > useful length: 0.5 – 4.0 m
- > circumferential length: 1.0 – 8.0 m
- > colour: green
- > according to EN 1492-2
- > GS-tested

Designation	Item number
Round sling 2 t green 1.0 m circumference	610200100027
Round sling 2 t green 2.0 m circumference	610200200027
Round sling 2 t green 3.0 m circumference	610200300027
Round sling 2 t green 4.0 m circumference	610200400027
Round sling 2 t green 5.0 m circumference	610200500027
Round sling 2 t green 6.0 m circumference	610200600027
Round sling 2 t green 8.0 m circumference	610200800027

Round slings



Technical data

- › nominal load capacity: 3,000 kg
- › useful length: 0.5 – 4.0 m
- › circumferential length: 1.0 – 8.0 m
- › colour: yellow
- › according to EN 1492-2
- › GS-tested

Designation	Item number
Round sling 3 t yellow 1.0 m circumference	610300100027
Round sling 3 t yellow 2.0 m circumference	610300200027
Round sling 3 t yellow 3.0 m circumference	610300300027
Round sling 3 t yellow 4.0 m circumference	610300400027
Round sling 3 t yellow 5.0 m circumference	610300500027
Round sling 3 t yellow 6.0 m circumference	610300600027
Round sling 3 t yellow 8.0 m circumference	610300800027



Technical data

- › nominal load capacity: 4,000 kg
- › useful length: 1.0 – 4.0 m
- › circumferential length: 2.0 – 8.0 m
- › colour: grey
- › according to EN 1492-2
- › GS-tested

Designation	Item number
Round sling 4 t grey 2.0 m circumference	610400200027
Round sling 4 t grey 4.0 m circumference	610400400027
Round sling 4 t grey 6.0 m circumference	610400600027
Round sling 4 t grey 8.0 m circumference	610400800027




Technical data

- › nominal load capacity: 6,000 kg
- › useful length: 2.0 – 4.0 m
- › circumferential length: 4.0 – 8.0 m
- › colour: brown
- › according to EN 1492-2
- › GS-tested

Designation	Item number
Round sling 6 t brown 4.0 m circumference	610600400027
Round sling 6 t brown 6.0 m circumference	610600600027
Round sling 6 t brown 8.0 m circumference	610600800027

Container seal cinch-up seal S 306



Technical data

- length: 375 mm
- VPE: 1,000 pieces

Designation	Item number
Seal cinch-up seal S 306 length 375 mm	0340306

Container seal clicker



Technical data

- pin diameter: 9 mm
- locking length: 45 mm

Designation	Item number
Seal clicker	0342211

Ratchets



Technical data

- > material: steel galvanised
- > LC: 2500 daN
- > STF: 704 / 550 daN
- > lifting length: 350 mm

Designation	Webbing width	Item number
Ratchet type 818	50 mm	128180000013



Technical data

- > material: steel galvanised
- > LC: 2500 daN
- > STF: 500 daN
- > lifting length: 310 mm

Designation	Webbing width	Item number
Ratchet type 822	50 mm	128220000013



Technical data

- > material: steel galvanised
- > LC: 2500 daN
- > STF: 300 daN
- > lifting length: 200 mm

Designation	Webbing width	Item number
Ratchet type 811/13KG	50 mm	128110000013KG



Technical data

- > material: steel / plastic
- > LC: 2500 daN
- > STF: 300 daN
- > lifting length: 200 mm

Designation	Webbing width	Item number
Ratchet type 811/20	50 mm	128110000050



Technical data

- › material: steel galvanised
- › LC: 2500 daN
- › STF: 300 daN
- › lifting length: 195 mm

Designation	Webbing width	Item number
Ratchet type 819	50 mm	128190000013



Technical data

- › material: steel galvanised
- › LC: 2500 daN
- › STF: 250 daN
- › lifting length: 170 mm

Designation	Webbing width	Item number
Ratchet type 823	50 mm	128230000013



Technical data

- › material: steel galvanised
- › LC: 1000 daN
- › STF: 210 daN
- › lifting length: 105 mm

Designation	Webbing width	Item number
Ratchet type 916	50 mm	129160000013



Technical data

- › material: stainless steel
- › LC: 1000 daN
- › STF: 210 daN
- › lifting length: 105 mm

Designation	Webbing width	Item number
Ratchet type 916/30	50 mm	129160000030

Ratchets



Technical data

- > material: steel powder coated
- > LC: 1500 daN
- > STF: 240 daN
- > lifting length: 125 mm

Designation	Webbing width	Item number
Ratchet type 908	35 mm	129080000050



Technical data

- > material: steel galvanised
- > LC: 1500 daN
- > STF: 240 daN
- > lifting length: 140 mm

Designation	Webbing width	Item number
Ratchet type 921	35 mm	129210000013



Technical data

- > material: steel galvanised
- > LC: 1000 daN
- > STF: 200 daN
- > lifting length: 105 mm

Designation	Webbing width	Item number
Ratchet type 917	35 mm	129170000013



Technical data

- > Material: Stahl galvanisiert
- > LC: 750 daN
- > STF: 200 daN
- > Hebellänge: 100 mm

Designation	Webbing width	Item number
Ratchet type 915/13	25 mm	129150000013



Technical data

- › material: steel powder coated
- › LC: 750 daN
- › STF: 200 daN
- › lifting length: 95 mm

Designation	Webbing width	Item number
Ratchet type 915/50	25 mm	129150000050



Technical data

- › material: steel galvanised
- › LC: 400 daN
- › STF: 160 daN
- › lifting length: 90 mm

Designation	Webbing width	Item number
Ratchet type 906	25 mm	129060000013

Cam buckles



Technical data

- › material: zinc casting
- › LC-Wert: 5000 daN

Designation	Webbing width	Item number
Cam buckle type 907	50 mm	129070000012



Technical data

- › material: zinc casting
- › LC-Wert: 450 daN

Designation	Webbing width	Item number
Cam buckle type 835	35 mm	128350000020

Cam buckles



Technical data

- > material: zinc casting
- > LC: 250 daN

Designation	Webbing width	Item number
Cam buckle type 805	25 mm	128050000020

Technical data

- > material: zinc casting
- > LC: 175 daN

Designation	Webbing width	Item number
Cam buckle type 804/50	25 mm	128040000050

Technical data

- > material: zinc casting
- > LC: 175 daN

Designation	Webbing width	Item number
Cam buckle type 804/20	25 mm	128040000020

Double buckle



Technical data

- > material: steel powder coated
- > LC: 900 daN

Designation	Webbing width	Item number
Double buckle type 806/12	50 mm	128060000012

Technical data

- > material: steel powder coated
- > LC: 700 daN

Designation	Webbing width	Item number
Double buckle type 806/16	50 mm	128060000016

Overcenter buckle



Technical data

- material: steel galvanised
- LC: 750 daN

Designation	Webbing width	Item number
Overcenter buckle type 912	50 mm	128050000020



Technical data

- material: steel galvanised
- LC: 1125 daN

Designation	Webbing width	Item number
Overcenter buckle type 913	45 mm	129130000013



Technical data

- material: stainless steel
- LC: 712,5 daN

Designaton	Webbing width	Item number
Overcenter buckle type 970	45 mm	129700000030

End fittings



Technical data

- > material: steel galvanised
- > LC: 2500 daN

Designation	Webbing width	Item number
Pointed hook	50 mm	140000000600



Technical data

- > material: steel galvanised
- > LC: 1500 daN

Designation	Webbing width	Item number
Pointed hook	50 mm	140000000700



Technical data

- > material: steel galvanised
- > LC: 1500 daN

Designation	Webbing width	Item number
Pointed hook	50 mm	140000035100



Technical data

- > material: steel galvanised
- > LC: 1500 daN

Designation	Webbing width	Item number
Pointed hook	50 mm	140000035300



Technical data

- material: steel galvanised
- LC: 1500 daN

Designation	Webbing width	Item number
Pointed hook	35 mm	140000035400



Technical data

- material: steel
- LC: 1500 daN

Designation	Webbing width	Item number
Pointed hook	35 mm	140000035600



Technical data

- material: steel galvanised
- LC: 1500 daN

Designation	Webbing width	Item number
Pointed hook	35 mm	140000052000



Technical data

- material: steel galvanised
- LC: 750 daN

Designation	Webbing width	Item number
Pointed hook	25 mm	140000000200

End fittings



Technical data

- > material: steel powder coated
- > LC: 750 daN

Designation	Webbing width	Item number
Pointed hook	25 mm	140000000250



Technical data

- > material: steel galvanised
- > LC: 2500 daN

Designation	Webbing width	Item number
Cranked pointed hook	50 mm	140000004600



Technical data

- > material: steel galvanised
- > LC: 2500 daN

Designation	Webbing width	Item number
Pointed hook with safety	50 mm	14000002060001



Technical data

- > material: steel galvanised
- > LC: 2500 daN

Designation	Webbing width	Item number
One finger claw hook	50 mm	140000001400



Technical data

- > material: steel galvanised
- > LC: 1500 daN

Designation	Webbing width	Item number
One finger claw hook	35 mm	140000053100



Technical data

- > material: steel galvanised
- > LC: 1250 daN

Designation	Webbing width	Item number
One finger claw hook	35 mm	140000053600



Technical data

- > material: steel galvanised
- > LC: 2500 daN

Designation	Webbing width	Item number
Flat hook	50 mm	140000001300



Technical data

- > material: steel galvanised
- > LC: 1500 daN

Designation	Webbing width	Item number
Flat hook	50 mm	140000001200

End fittings



Technical data

- > material: steel galvanised
- > LC: 650 daN

Designation	Webbing width	Item number
Flat hook	25 mm	140000002500



Technical data

- > material: steel galvanised
- > LC: 2500 daN

Designation	Webbing width	Item number
Claw hook	50 mm	140000006500



Technical data

- > material: steel/PVC coated
- > LC: 250 daN

Designation	Webbing width	Item number
S-Hook	25 mm	140000072500



Technical data

- > material: steel galvanised
- > LC: 1500 daN

Designation	Webbing width	Item number
Carabine hook	35 mm	140000053000



Technical data

- > material: steel galvanised
- > LC: 1000 daN

Designation	Webbing width	Item number
Carabine hook	35 mm	140000031100



Technical data

- > material: steel galvanised
- > LC: 680 daN

Designation	Webbing width	Item number
Carabine hook	25 mm	140000020100



Technical data

- > material: steel galvanised
- > LC: 2500 daN

Designation	Webbing width	Item number
Triangel carabine hook	50 mm	140000007500

End fittings



Technical data

- > material: steel
- > LC: 400 daN

Designation	Webbing width	Item number
Delta carabine hook	25 mm	140000020200



Technical data

- > material: steel galvanised
- > LC: 2500 daN

Designation	Webbing width	Item number
D-Ring	50 mm	140000001800



Technical data

- > material: steel galvanised
- > LC: 850 daN

Designation	Webbing width	Item number
D-Ring	50 mm	140000070500



Technical data

- > material: steel galvanised
- > LC: 1500 daN

Designation	Webbing width	Item number
D-Ring	35 mm	140000001500



Technical data

- > material: steel galvanised
- > LC: 1000 daN

Designation	Webbing width	Item number
End fitting for anchor combi lashing track	50 mm	140000082200



Technical data

- > material: steel galvanised
- > LC: 1000 daN

Designation	Webbing width	Item number
End fitting for anchor combi lashing track	50 mm	140000082601



Technical data

- > material: steel galvanised
- > LC: 750 daN

Designation	Webbing width	Item number
End fitting for keyhole	50 mm	140000082800

One-way Key-Lock quick lashing system



The one-way lashing system is an economical alternative to conventional lashing straps and consists of polypropylene fabric, buckle and a tensioning tool.

The KEY-LOCK system is mainly used to secure cargo in containers, aeroplanes, trucks and trains and on ships.

The reusable tensioners guarantee simple and quick lashing.



Key-Lock webbing: Technical data

- > one-way lashing system
- > minimum breaking force: 2,000 daN
- > fabric width: 50 mm
- > presentation: 100 m roll


Designation	Item number
Key-Lock endless webbing tape 50 mm	410013850070



Key-Lock buckle: Technical data

- > one-way lashing system
- > minimum breaking force: 2,000 daN
- > material: steel, vinyl-coated

Designation	Item number
Key-Lock buckles 2 t	411800000015

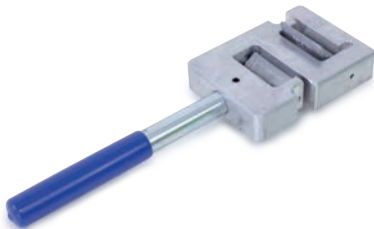

Key-Lock manual tensioning device: Technical data

- > one-way lashing system
- > material: aluminum

Designation	Item number
Key-Lock manual clamping device aluminum	410000008120

Reel tensioner



Technical data

- > for straps up to 20 mm

Designation	Item number
Reel tensioner, Type AVT, 9-20	420000000615

Buckles for straps



Technical data

- > one-way lashing
- > VPE = 1,000 pieces

Designation	Item number
Unistrap-Buckles, 13 mm	420400000012
Unistrap-Buckles, 16 mm	420500000012
Unistrap-Buckles, 19 mm	420600000012

Strapping for one-way lashings



Technical data

- > width: 9 mm
- > tensile strength: 275 daN
- > presentation: 1,500 m roll

Designation	Item number
Unistrap packaging tape 9 mm	420080300000

- > width: 13 mm
- > tensile strength: 390 daN
- > presentation: 1,100 m roll

Designation	Item number
Unistrap packing tape 13 mm	420080400000

- > width: 16 mm
- > tensile strength: 470 daN
- > presentation: 850 m roll

Designation	Item number
Unistrap packaging tape 16 mm	420080500000

- > width: 19 mm
- > tensile strength: 570 kN
- > presentation: 600 m roll

Designation	Item number
Unistrap packaging tape 19 mm	420080600000

Edge protection 5500



Technical data

- > with reinforcement and chamfer
- > for strap widths up to 65 mm
- > colour: black
- > material: plastic
- > side length: 172 x 132 mm
- > practical for paper roll transports or similar goods

Designation	Item number
Edge protection black 65 mm	165500000040

Edge protection 5501



Technical data

- > with reinforcement and chamfer
- > for strap widths up to 65 mm
- > colour: black
- > material: plastic
- > side length: 172 x 132 mm

Designation	Item number
Edge protection Econom	165501000040

Edge protection 5502



Technical data

- > with reinforcement and chamfer
- > for strap widths up to 75 mm
- > colour: black
- > material: plastic
- > side length: 180 x 130 mm

Designation	Item number
Edge protection Jumbo	165502000040

Edge protection 5503



Technical data

- > with reinforcement and chamfer
- > for strap widths up to 75 mm
- > colour: black
- > material: plastic
- > side length: 175 x 55 mm
- > special reinforcement for webbing to have an optimal pressure distribution

Designation	Item number
Edge protection Strong Paper	165503000040

Edge protection 6600



Technical data

- > with chamfer
- > for strap widths up to 85 mm
- > colour: red
- > material: plastic
- > side length: 140 x 140 mm
- > for the flexible use of sensitive goods up to the transport of building materials

Designation	Item number
Edge protection red 85 mm	166600000040

Edge protection 2200



Technical data

- > light version
- > for strap widths up to 100 mm
- > colour: white
- > material: plastic
- > side length: 95 x 95 mm

Designation	Item number
Edge protection white 100 mm	162200000240

Edge protection 3000



Technical data

- > lengths: 800 mm / 1,000 mm / 1,200 mm / 6,000 mm
- > format: 190 x 190 mm
- > colour: orange
- > material: plastic
- > edge protector for the transport of building material or similar goods

Designation	Item number
Edge protection 190 x 190 orange 800 mm	16300040-0800
Edge protection 190 x 190 orange 1,000 mm	16300040-1000
Edge protection 190 x 190 orange 1,200 mm	16300040-1200
Edge protection 190 x 190 orange 6,000 mm	16300040-6000

Edge protection 2500




Technical data

- > for strap width 25 mm
- > material: plastic
- > colour: black
- > weight: 22 g
- > side length: 55/95 mm

Designation	Item number
Edge protection black 25 mm	162500000040

Edge protection / ratchet pad 1630

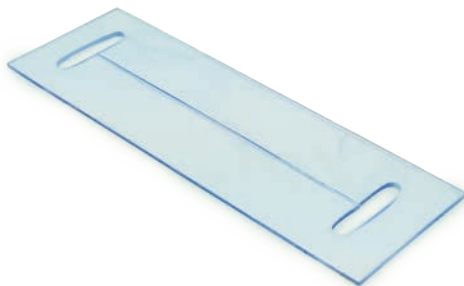

Technical data

- > for strap widths up to 50 mm
- > colour: transparent
- > material: plastic, polyurethan
- > material thickness: 3,8 mm

Designation	Item number
Edge protection ratchet pad 50 mm, slotted	163003

Special feature: The soft material adapts well to goods with round shapes and thus protects the cargo from being scratched by the ratchet or the strap.

Edge protection hose 1020 rubberised




Technical data

- > for strap widths up to 50 mm
- > material: PVC
- > surface: rubberised
- > colour: blue
- > sold by the metre
- > material thickness: approx. 1,2 mm,
exterior width: approx. 66 mm

Designation	Item number
Edge protection hose 50 mm rubberised	161020000040

Special feature: The soft material adapts well to goods with round shapes and thus protects the cargo from being scratched by the strap.

Edge protection hose 1020 polyester

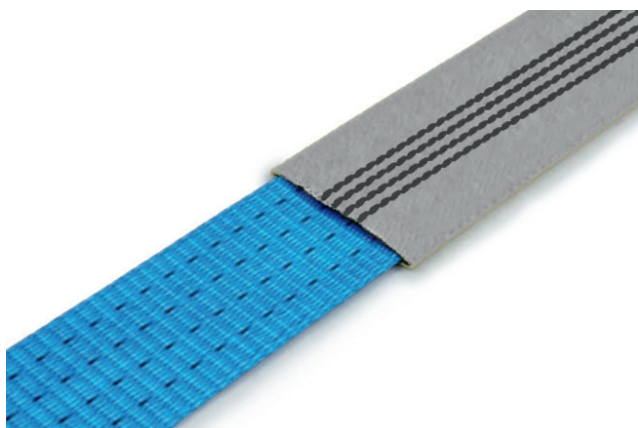


Technical data

- > for strap widths up to 50 mm
- > material: polyester
- > colour: grey
- > sold by the metre
- > material thickness: approx. 0,7 mm,
exterior width: approx. 67 mm

Designation	Item number
Edge protection hose 50 mm PES grey	161020000073

Special feature: The soft material adapts well to goods with round shapes and thus protects the cargo from being scratched by the strap.

Edge protection hose 1021

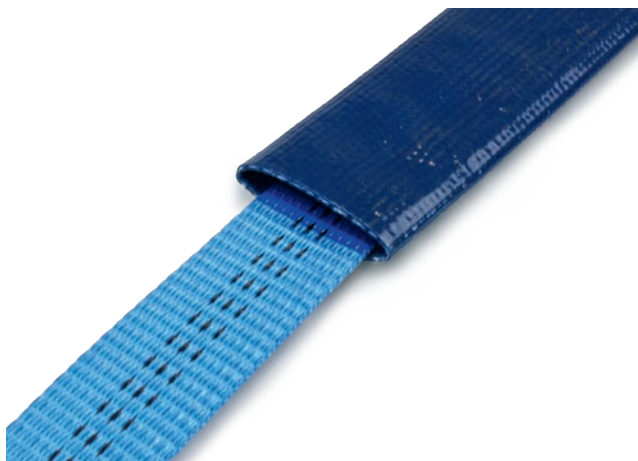

Technical data

- > for strap widths up to 40 mm
- > material: PVC
- > surface: rubberised
- > colour: blue
- > sold by the metre
- > material thickness: approx. 2 mm,
exterior width: approx. 52 mm

Designation	Item number
Edge protection hose 35 mm rubberised	161021000040

Special feature: The soft material adapts well to goods with round shapes and thus protects the cargo from being scratched by the strap.