

#### Principal characteristics

- The 1/2" cylindrical housing, plus the option of all fastening systems (brackets, joints or flange), makes the PZ12 series highly versatile for a wide range of applications.
- The optimized mechanical structure makes the product suitable for developing various special executions (contact Gefran customer service for details).
- Installation is simplified by the lack of electrical signal variation at output outside theoretical electrical stroke.
- Ideal for wood and glass working and finishing machines and for car test benches.




#### TECHNICAL DATA


Useful electrical stroke (C.E.U.)	from 25 to 300 mm (for intermediate strokes see table "Electrical / Mechanical Data")
Resolution	infinite
Protection	IP60
Independent linearity (within C.E.U.)	see table
Displacement speed	< = 10 m/s
Displacement force	< = 0.5N
Life	>25x10 <sup>6</sup> m strokes, or 100x10 <sup>6</sup> operations, whichever is less (within C.E.U.)
Vibrations	5...2000Hz, Amax = 0,75 mm amax. = 20 g
Shock	50 g, 11ms.
Tolerance on resistance	± 20%
Recommended cursor current	< 0,1 mA
Maximum cursor current	10mA
Max. applicable voltage	see table
Electrical isolation	>100MΩ a 500V~, 1bar, 2s
Dielectric strength	< 100 mA a 500V~, 50Hz, 2s, 1bar
Dissipation at 40°C (0W at 120°C)	see table
Actual Temperature Coefficient of the output voltage	< 5 ppm/°C typical
Working temperature	-30...+100°C
Storage temperature	-50...+120°C
Case material	Anodised aluminium Nylon 66 G 25
Control rod material	Stainless steel AISI 303
Fixing	Brackets, selfaligning ball-joints or flange

#### MECHANICAL DIMENSIONS


##### PZ12-S

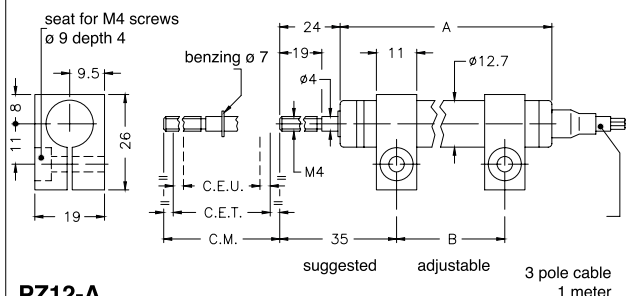

##### PZ12-A

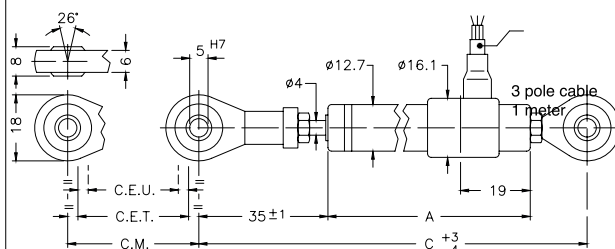

##### PZ12-F

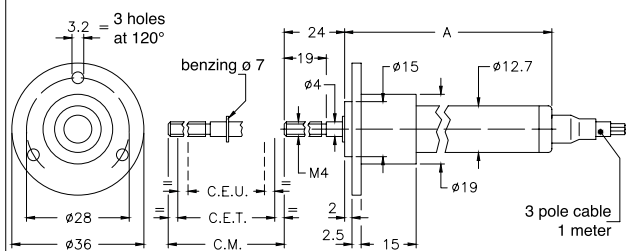

## MECHANICAL / ELECTRICAL DATA

MODEL		25	50	75	100	125	150	200	250	300	
Useful electrical stroke (C.E.U.) +1 / -0	mm	25	50	75	100	125	150	200	250	300	
Theoretical electrical stroke (C.E.T.) ± 1	mm	C.E.U. +1									
Resistance (C.E.T.)	kΩ	1	2	3	4	5	6	8	6	12	
Independent linearity (within C.E.U.)	± %	0.2	0.1	0.1	0.1	0.05	0.05	0.05	0.05	0.05	
Dissipation at 40°C (0W at 120°C)	W	0.5	1	1.5	2	2.5	3	3	3	3	
Maximum applicable voltage	V	20	40	60							
Mechanical stroke (C.M.)	mm	C.E.U. +5									
Case length (A)	mod. PZ12 - S	mm	74.5	99.5	124.5	149.5	174.5	199.5	249.5	299.5	349.5
	mod. PZ12 - A	mm	102	127	152	177	202	227	277	327	377
	mod. PZ12 - F	mm	74.5	99.5	124.5	149.5	174.5	199.5	249.5	299.5	349.5
Recommended distance between brackets (B)	mm	42	67	92	117	142	167	217	267	317	
Minimum distance between ball-joints (C)	mm	153	178	203	228	253	278	328	378	428	
Weight	mod. PZ12 - S	g	45	55	65	75	85	95	115	135	155
	mod. PZ12 - A	g	70	80	90	100	110	120	140	160	180
	mod. PZ12 - F	g	60	70	80	90	100	110	130	150	170

## ELECTRICAL CONNECTIONS

### INSTALLATION INSTRUCTIONS

- Respect the indicated electrical connections (DO NOT use the transducer as a variable resistance)
- When calibrating the transducer, be careful to set the stroke so that the output does not drop below 1% or rise beyond 99% of the supply voltage.

## ORDER CODE

Displacement transducer **PZ12**

Mounting by brackets	<b>S</b>
Mounting by selfaligning ball-joints	<b>A</b>
Mounting by flange	<b>F</b>

Model

Example: **PZ12 - S - 25**  
Displacement transducer model PZ12, mounting by brackets, useful electrical stroke (C.E.U.) 25mm

No certificate attached	<b>0</b>
Linearity curve to be attached	<b>L</b>
Cable length 1 mt	<b>0</b>
Cable length 2 mt	<b>2</b>
Cable length 3 mt	<b>3</b>
Other lengths on request	....

Colour of plastic heads (green)	<b>0</b>
---------------------------------	----------

## ACCESSORIES

Code	
Mounting brackets for PZ12-S (2 pieces included in the confection)	<b>STA074</b>

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice

**GEFRAN spa**  
via Sebina, 74  
25050 PROVAGLIO D'ISEO (BS) - ITALIA  
tel. 0309888.1 - fax. 0309839063  
Internet: <http://www.gefran.com>

**GEFRAN**

DTS\_PZ12\_11-2023\_ENG