


INDIA'S FIRST BIS CERTIFIED BALL VALVE

Carry On
Fittings for life
Valves Division

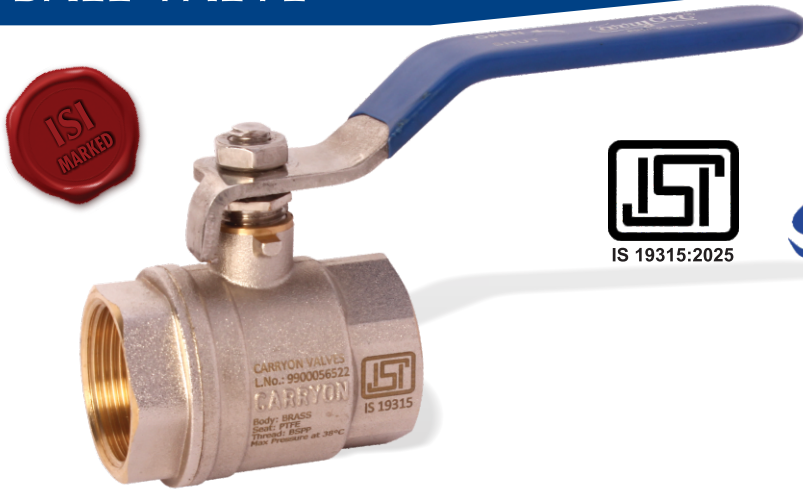

Forged Brass Ball Valve PN25

Features

- Full Bore, Two Piece Design
- Premium PTFE Body Seat & Gland Rings
- Quarter Turn, Lever Operated
- Nickel & Chrome Plated Finish
- Anti Blow-out Stem
- Screwed Female Ends, BSP/NPT Threads
- Anti Corrosive
- Stainless Steel Lever avoids Rusting
- Stainless Steel parts provide Extra Strength

Test Pressure

Hydraulic:


Body Test Pressure - 35 Kg/cm²

Working Test Pressure - 25 Kg/cm²

Air Test Pressure : 6.5 Kg/cm²

Application : Water, Oil, Air, Gas

HSN : 84818030

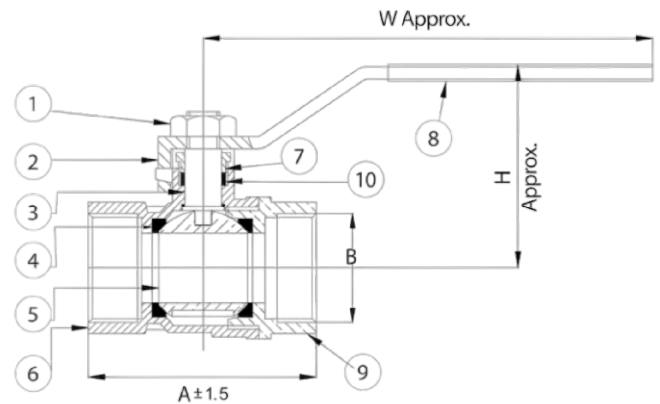

Materials

Part No.	Part	Nos.	Material
1	Lever Nut	1	Stainless Steel
2	Lever	1	Stainless Steel
3	Stem	1	Stainless Steel
4	Body Seat Ring	2	PTFE
5	Ball	1	Stainless Steel
6	Body	1	Forged Brass
7	Gland Checknut	1	Extruded Brass
8	Lever Sleeve	1	PVC
9	Body Connector	1	Forged Brass
10	Gland Packing & Thrust Washer	2	PTFE

Dimensions

Nominal Size (Inches)	A (±1.5)	B (BSP)	W~	H~
1/4	46	1/4"	77	43
3/8	46	3/8"	77	43
1/2	50	1/2"	100	47
3/4	58	3/4"	100	53
1	67	1"	130	58
1.1/4	77	1.1/4"	150	75
1.1/2	92	1.1/2"	195	85
2	104	2"	195	92

(~ ± 5mm)

Max. Retail Price

Nominal Size (millimeters)	CAT No.	M.R.P.
8	2001B	415.00
10	2002B	415.00
15	2003B	484.00
20	2004B	660.00
25	2005B	990.00
32	2006B	1730.00
40	2007B	2500.00
50	2008B	3800.00

(ISI Marked)

CARRYON VALVES

📍 242/2 Carryon Road, Hargobind Nagar, Bypass, Jalandhar, Punjab 144012 IN

☎ +91 9888228826 🌐 www.carryonvalves.in ✉ care@carryonvalves.in

CARRYON FORGED BRASS BALL VALVE FULL BORE PN-25

Description

- Full Bore, Two Piece Design
- Premium PTFE Body Seat & Gland Rings
- Quarter Turn, Lever Operated
- Nickel & Chrome Plated Finish
- Anti Blow-out Stem
- Screwed Female Ends BSP/NPT Threads
- Anti Corrosive
- Stainless Steel Lever avoids Rusting
- Stainless Steel parts provide Extra Strength


Test Pressure

Hydraulic:

Body Test Pressure - 35 Kg/cm sq

Working Test Pressure - 25 Kg/cm sq

Air Test Pressure : 6.5 Kg/cm sq

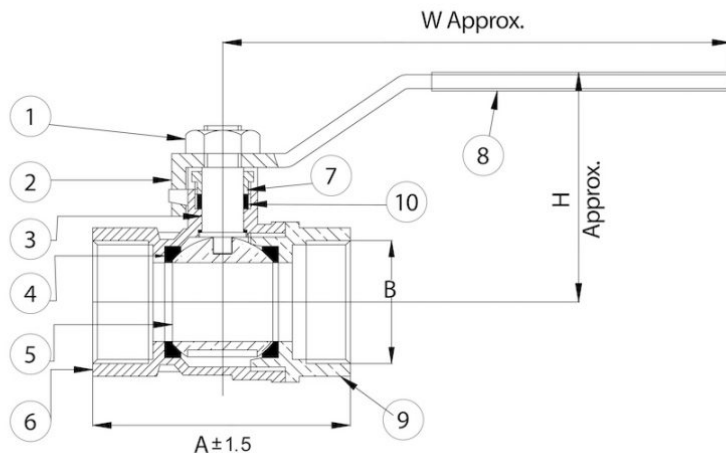

Dimensions

Maximum Working Temperature: -2 to +110 °C

Nominal Size (Inches)	Nominal Size (mm)	A (±1.5)	B (BSP)	W~	H~
1/4	8	46	1/4"	77	43
3/8	10	46	3/8"	77	43
1/2	15	50	1/2"	100	47
3/4	20	58	3/4"	100	53
1	25	67	1"	130	58
1.1/4	32	77	1.1/4"	150	75
1.1/2	40	92	1.1/2"	195	85
2	50	104	2"	195	92

(~ ±5.00mm)

Certification

Work Test Certificate can be issued, if required.

Application : Water, Oil, Air, Gas

HSN : 84818030

Materials

Part No.	Part	Nos.	Material
1	Lever Nut	1	Stainless Steel
2	Lever	1	Stainless Steel
3	Stem	1	Stainless Steel
4	Body Seat Ring	2	PTFE
5	Ball	1	Stainless Steel
6	Body	1	Forged Brass
7	Gland Checknut	1	Extruded Brass
8	Lever Sleeve	1	PVC
9	Body Connector	1	Forged Brass
10	Gland Packing & Thrust Washer	2	PTFE

NOTE: Due to continuous development and improvement the above specifications are subject to change from time to time. We request you to confirm before placing any orders.