



## HPL TOPS

HPL (High Pressure Laminate) tops with beveled edge and prepared with four M6 threads for the "star" cross.

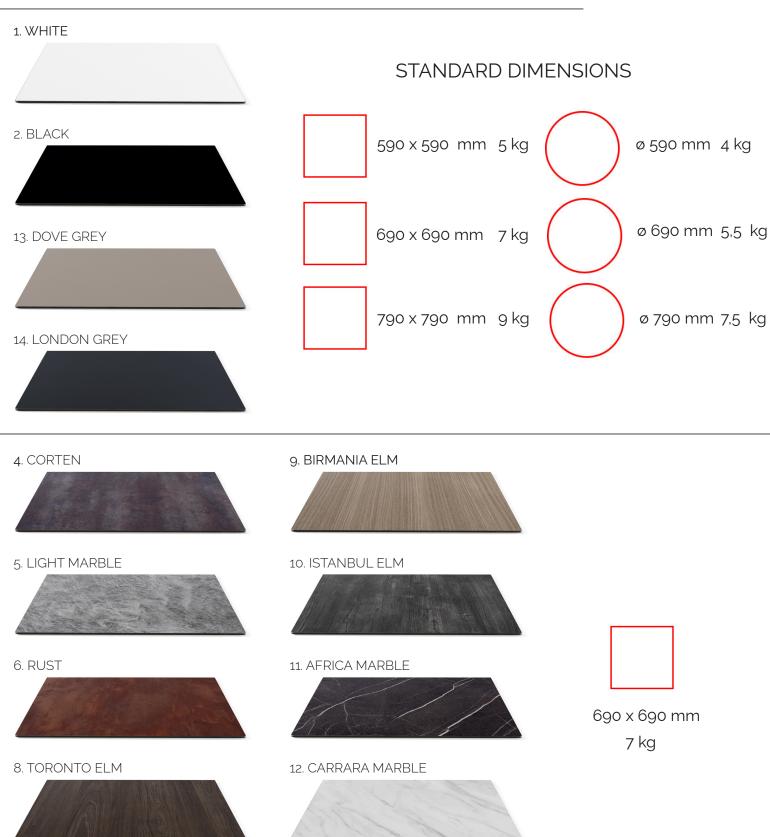

N.B: Colors may vary slightly from production to production.

see "Warranty, cleaning and maintenance of the products, use and placement of the products"

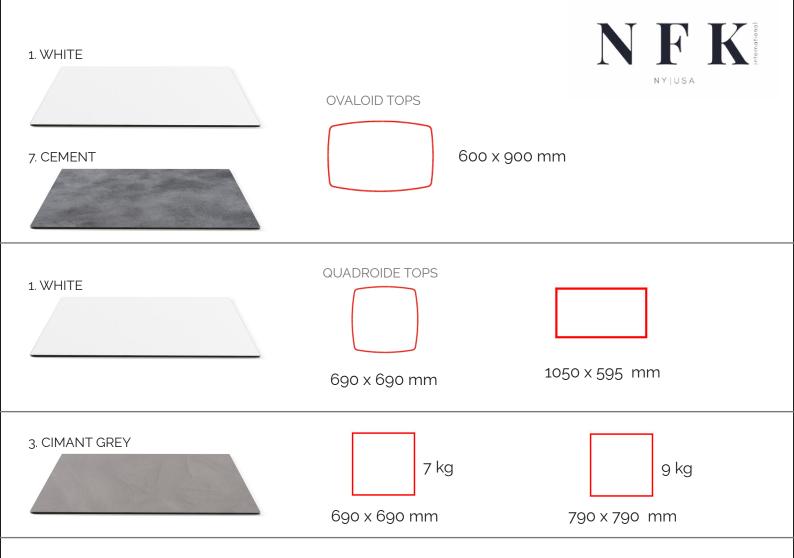

#### **TECHNICAL DETAILS**

- HPL (High Pressure Laminate) top
- Beveled edge prepared with 4 M6 inserts for the "star" cross
- 10 mm thick

#### **EXTRAS**

- Other tops of various dimensions and colours available on request
- Screw kit for the attachment of the base to the base
- For rectangular tops with a size of 1090 mm or larger, the use of reinforcement bars is recommended

Before assembling, remove the transparent protective film from both the upper and bottom surface of the top.



N.B: Colors may vary slightly from production to production.

see "Warranty, cleaning and maintenance of the products, use and placement of the products"




# **CLEANING GUIDELINES**

HPL laminate products are easy to clean and maintain.

### DAILY CLEANING

An HPL surface must be regularly cleaned. It requires no special maintenance, just a damp cloth and warm water or a mild non-aggressive detergent. Almost all common household cleaners can be used.

For the most common stains, simply wipe the surface with warm water using a non-abrasive cloth. For more tenacious and consistent stains, we recommend using warm water with the addition of a mild detergent. If detergents are used, always rinse with plenty of warm water and end by drying with a clean cloth.

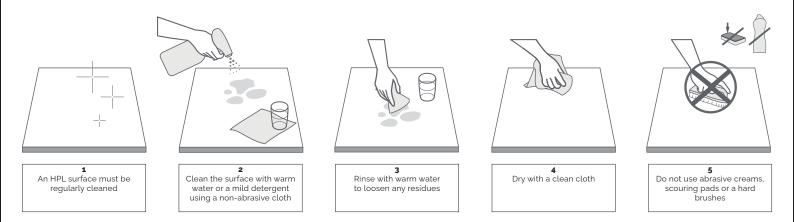

### DEEP CLEANING

Ink or nail polish stains can be removed by locally using a suitable solvent (alcohol or acetone) applied on a clean cloth. In this case it is recommended to always follow the manufacturer's health and safety instructions. Complete cleaning by rinsing and subsequently drying.

Paint and/or graffiti stains can be removed using specific organic solvents (always follow the manufacturer's health and safety instructions). Again, after using specific solvents, it is recommended to rinse well and dry.