



Ti-C Series

**CURVED**



Customzied



Front/rear Maintenance



Remote Control



High Brightness




Wide Viewing Angle




High Protection



**Top View**

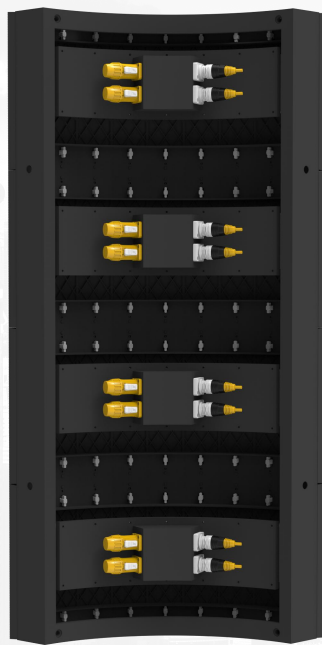


**Back View**

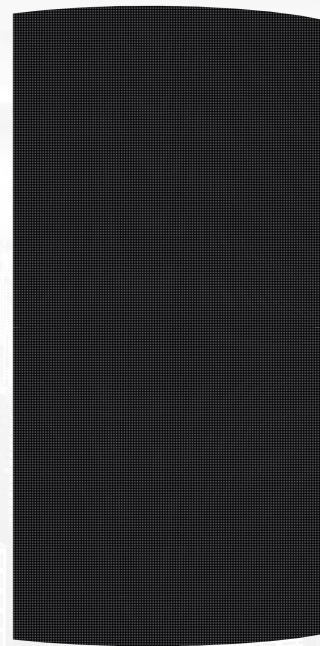


**Front View**

## Dimension

562.5mm

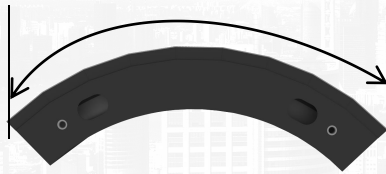



1000mm

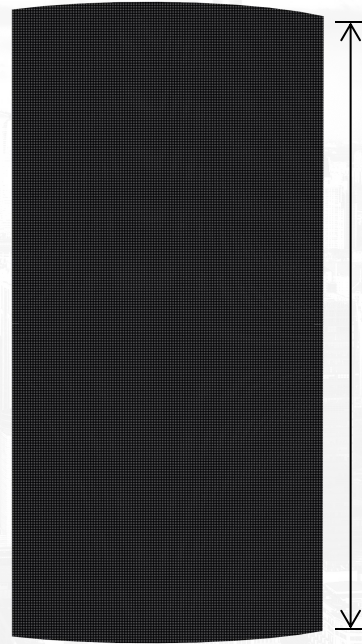

## Module Size




62.5mm

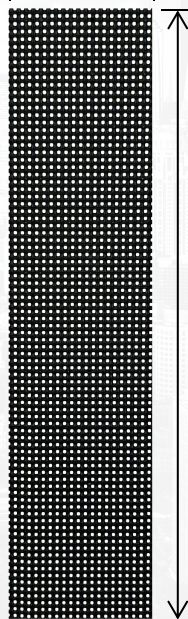


250mm

## Schematic diagram of corner

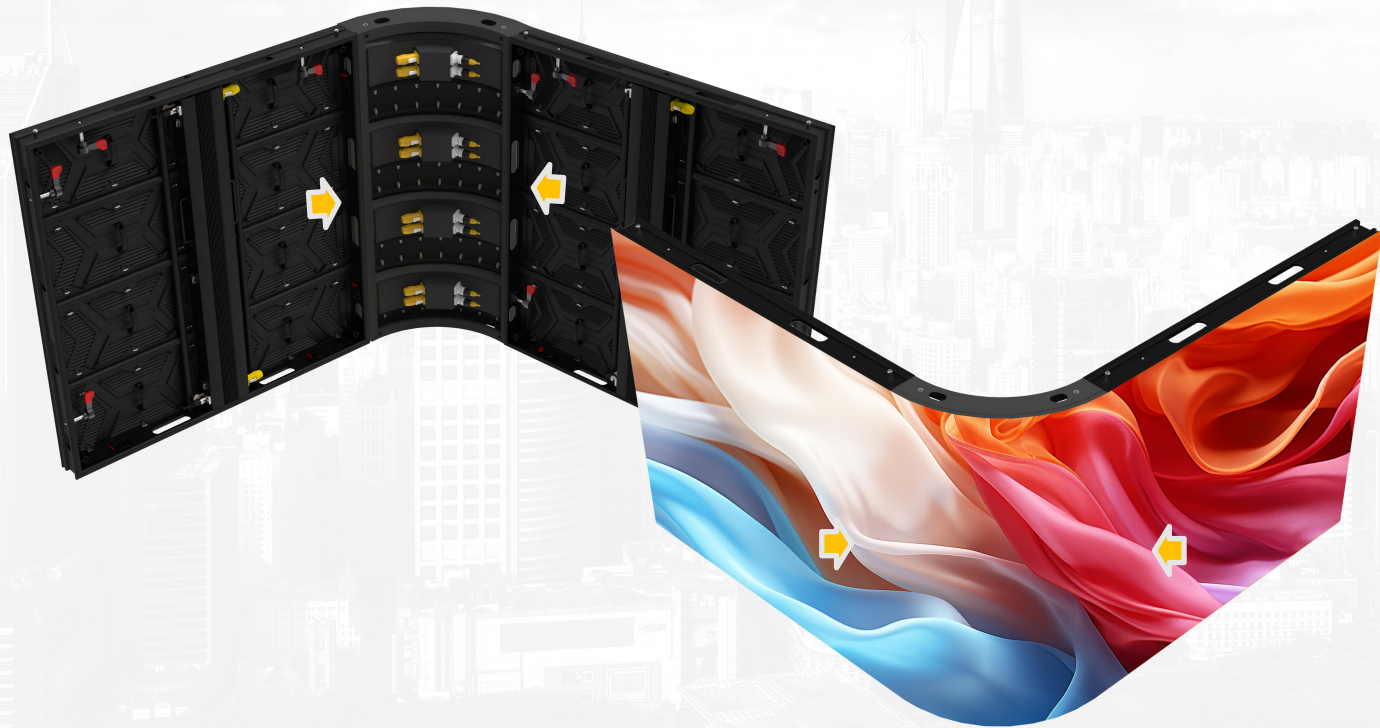

## Maintenance

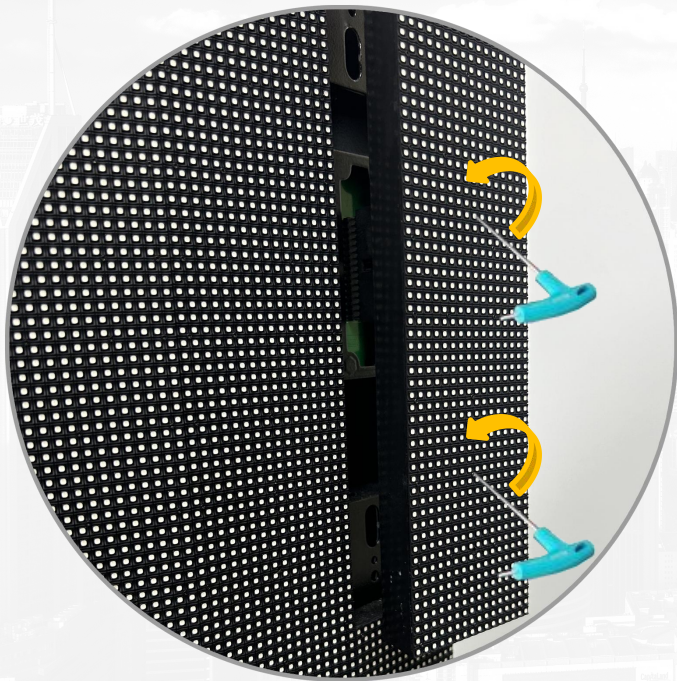

Front Maintenance



Rear Maintenance



Both front and rear can be IP65 waterproof level




## Seamless Splicing



## High Refresh Rate




High refresh rate

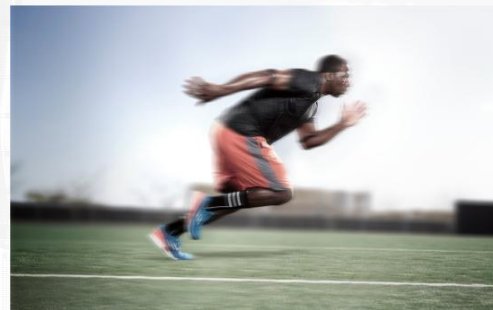


Low refresh rate

## High Grey Scale

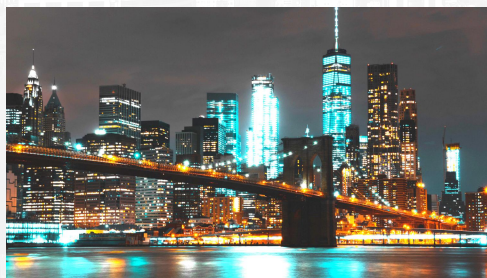

High grey scale

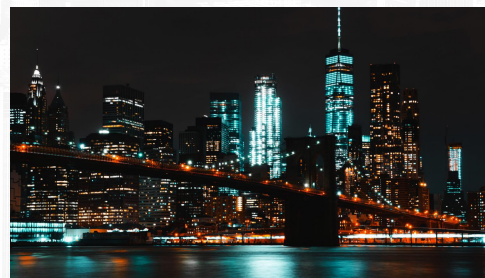

High grey scale

## Wide Viewing Angle

Perfect presentation of images from any angle





90 Degree curved corner



LED column

## Pixel Pitch

## P3.91

## P4.81

## P6.25

## P7.81

## P10.42

| LED Type                              | SMD1921                    | SMD1921                | SMD2727                | SMD2727                | SMD2727                |
|---------------------------------------|----------------------------|------------------------|------------------------|------------------------|------------------------|
| Physical Density(Dot/m <sup>2</sup> ) | 65535                      | 43264                  | 25600                  | 16384                  | 9216                   |
| Module Resolution                     | 16X64                      | 104X52                 | 80X40                  | 8X32                   | 6X24                   |
| Module Size(WXH)                      | 62.5X250                   | 62.5X250               | 62.5X250               | 62.5X250               | 62.5X250               |
| Cabinet Size(mm)                      | 562.5X1000                 | 562.5X1000             | 562.5X1000             | 562.5X1000             | 562.5X1000             |
| Cabinet Resoluition                   | 144X256                    | 208X208                | 160X160                | 72X128                 | 54X96                  |
| Module Quantity (WXH)                 | 9X4                        | 9X4                    | 9X4                    | 9X4                    | 9X4                    |
| Cabinet Weight(kg)                    | 24.6                       | 24.6                   | 24.6                   | 24.6                   | 24.6                   |
| Maintenance Mode                      | Frotn/rear maintenance     | Frotn/rear maintenance | Frotn/rear maintenance | Frotn/rear maintenance | Frotn/rear maintenance |
| Material                              | Iron                       | Iron                   | Iron                   | Iron                   | Iron                   |
| Brightness(Nits)                      | 5000                       | 6000                   | 6000                   | 5000                   | 5000                   |
| Color Temperature(K)                  | 1000-18500 Adjustable      | 1000-18500 Adjustable  | 1000-18500 Adjustable  | 1000-18500 Adjustable  | 1000-18500 Adjustable  |
| Viewing Angle(V/H)                    | 140°/160°                  | 140°/160°              | 140°/160°              | 140°/160°              | 140°/160°              |
| Contrast Ratio                        | 10000 : 1                  | 10000 : 1              | 10000 : 1              | 10000 : 1              | 10000 : 1              |
| Frame Frequency                       | 50/60                      | 50/60                  | 50/60                  | 50/60                  | 50/60                  |
| Drive Mode                            | 16 Scan                    | 13 Scan                | 8 Scan                 | 4 Scan                 | 2 Scan                 |
| Grey Scale                            | 65536                      | 65536                  | 65536                  | 65536                  | 65536                  |
| Refresh Rate(Hz)                      | 3840                       | 3840                   | 3840                   | 3840                   | 3840                   |
| Max Power Con.(W/m <sup>2</sup> )     | 650                        | 650                    | 650                    | 650                    | 650                    |
| Ave Power Con.(W/m <sup>2</sup> )     | 200-300                    | 100-200                | 100-200                | 200-300                | 200-300                |
| Protection Level                      | IP65                       | IP65                   | IP65                   | IP65                   | IP65                   |
| Power Input                           | AC90-264V,47-63Hz          |                        |                        |                        |                        |
| Operation T/H(°C/RH)                  | -20~60°C/10%~85%           |                        |                        |                        |                        |
| Storate T/H(°C/RH)                    | -20~60°C/10%~85%           |                        |                        |                        |                        |
| Cert.                                 | CCC/CE/RoHS/FCC/CB/TUV/IEC |                        |                        |                        |                        |



**THANKS**