


KICKSTAND INSTALLATION

CT LIMIT

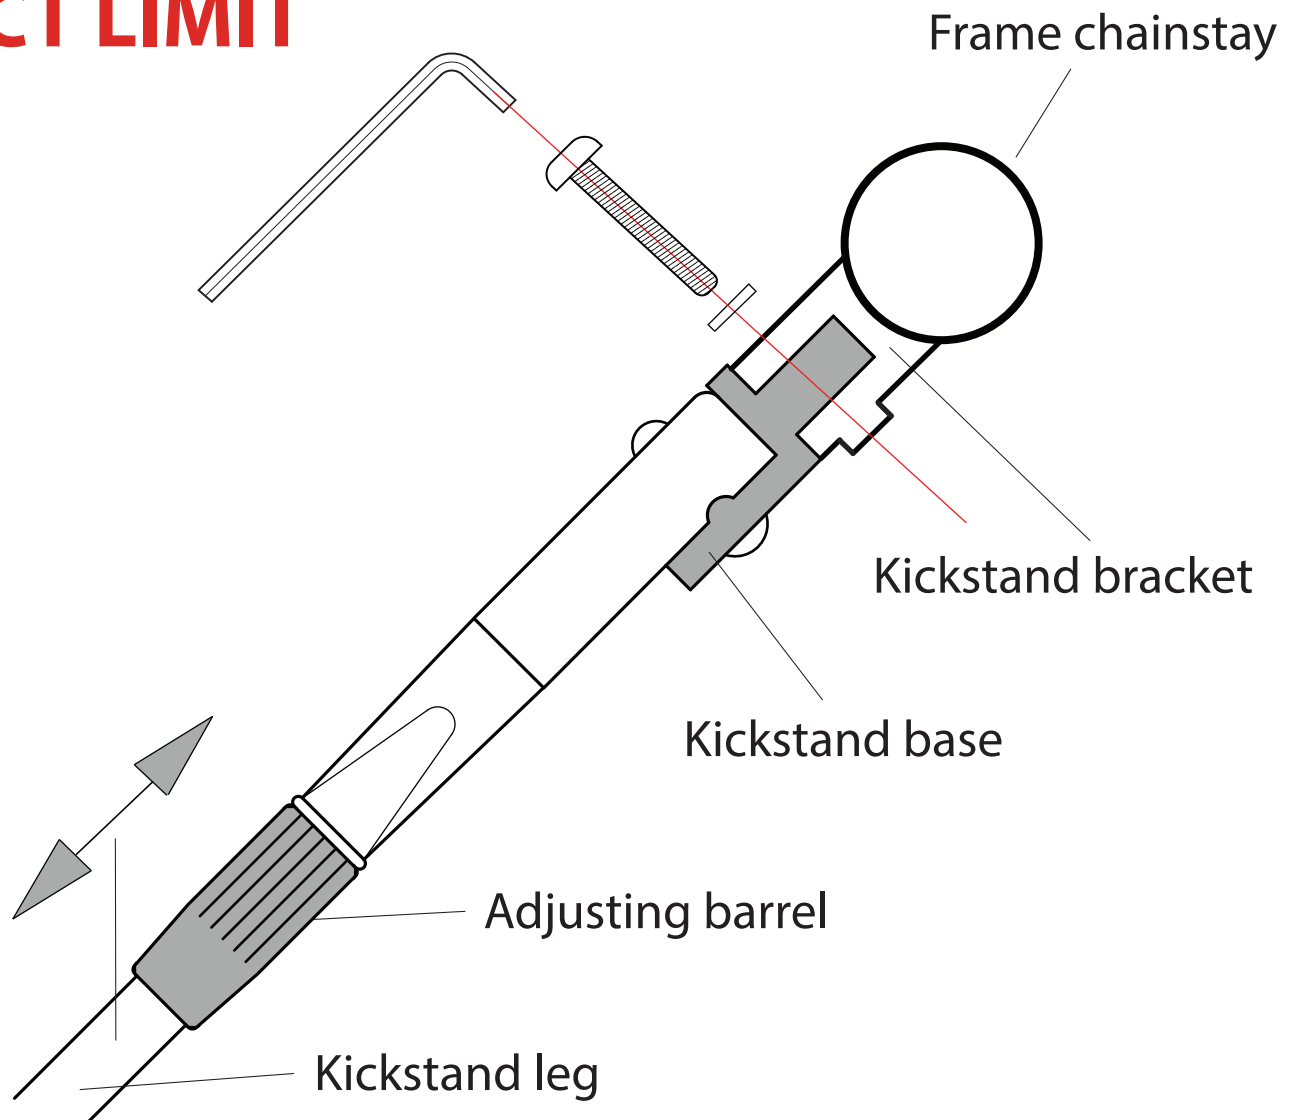

To install the kickstand, follow the above illustration using a 3mm Hex key and an 8mm wrench. Place the kickstand base under the swing arm bracket and tighten the included bolts and nuts to 75-90Lbs/In.

Adjust the leg's length by loosening its barrel and moving the leg up/down while the bike is staying stable on the ground. Tighten the barrel properly.



IMPORTANT WARNING



Never ride your bike with unfolded kickstand. It may cause serious accident and injuries. Always wear a helmet when riding your bike.

Maxarya Design and Manufacturing Inc. www.maxarya.com