



The primary function of Crepine Type Strainers is to filter out and block foreign particles that could potentially harm crucial system components. These strainers feature a specially designed filter that effectively captures and retains unwanted debris, preventing it from entering the pipeline. By providing comprehensive particle filtration, Crepine Type Strainers ensure the integrity and longevity of the entire system.

Scope of Application


Pipelines
Water treatment plants
Pumping stations
Tanks
Seawater applications
Power plants
Industry

Temperature

-30° / +200°

Optional

Galvanized Steel
Stainless Steel

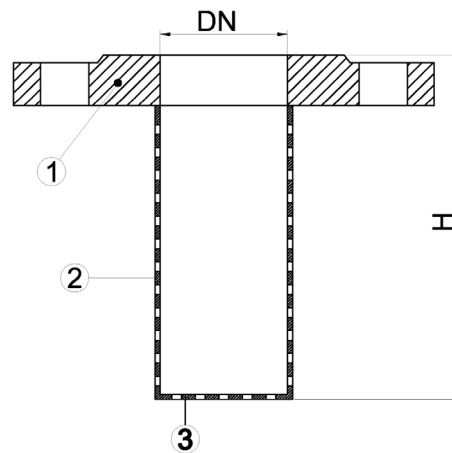

Material Specifications

NU	PART NAME	MATERIAL
1	Flange	Normal - Galvanized - Stainless Steel
2	Body Sheet	Normal - Galvanized - Stainless Steel
3	Top Sheet	Normal - Galvanized - Stainless Steel



Dimensions

DN (mm)	PN	D	DI	f	C	lxn	H	WEIGHT
40	10-16-25	150	110	3	19	19x4	160	1,7
50	10-16-25	165	125	3	19	19x4	160	1,8
65	10-16	185	145	3	19	19x4	190	2
	25	185	145	3	19	19x8	190	2,2
80	10-16-25	200	160	3	19	19x8	195	2,4
100	10-16	220	180	3	19	19x8	235	2,9
	25	235	190	3	19	23x8	235	3,4
125	10-16	250	210	3	19	19x8	250	5
	25	270	220	3	19	28x8	250	6
150	10-16	285	240	3	19	23x8	310	8
	25	300	250	3	20	28x8	310	10
200	10	340	295	4	20	23x8	400	10
	16	340	295	4	20	23x12	400	10
	25	360	310	4	22	28x12	400	15
250	10	395	350	4	22	23x12	415	18
	16	405	355	4	22	28x12	415	18
	25	425	370	4	24,5	31x12	415	24
300	10	445	400	4	24,5	23x12	485	28
	16	460	410	4	24,5	28x12	485	28
	25	485	430	4	27,5	31x16	485	35
350	10	505	460	4	24,5	23x16	605	40
	16	520	470	4	26,5	28x16	605	40
	25	555	490	4	30	34x16	605	50
400	10	565	515	4	24,5	28x16	670	60
	16	580	525	4	28	31x16	670	60
	25	620	550	4	32	37x16	670	72
450	10	615	565	4	25,5	28x20	700	75
	16	640	585	4	30	31x20	700	75
	25	670	600	4	34,5	37x20	700	90
500	10	670	620	4	26,5	28x20	800	100
	16	715	650	4	31,5	34x20	800	100
	25	730	660	4	36,5	37x20	800	120