




The DCT26 Deluge Valve is designed for rapid and reliable water discharge in deluge fire protection systems. Engineered to handle high-risk environments and large-scale fire suppression needs, this valve ensures effective and immediate activation for comprehensive fire protection.

Scope of Application

- Industrial Facilities
- Power Stations
- Petrochemical Industries
- Marine and Offshore Platforms
- Data Centers
- Aerospace Facilities
- Mining Operations
- Public Infrastructure
- Chemical Storage Areas

Optional

- 300 PSI

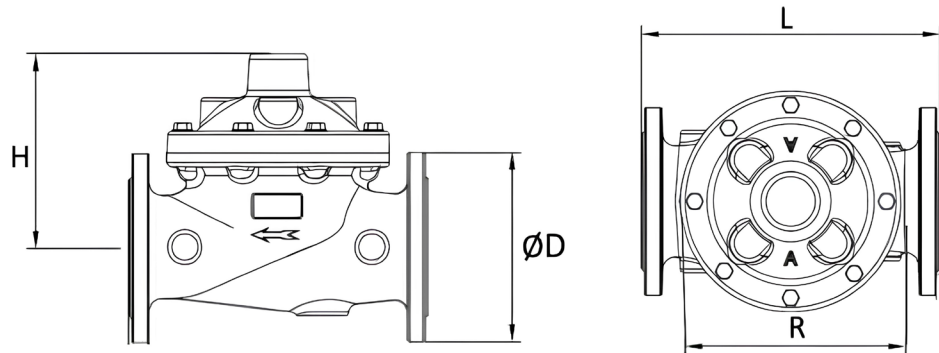

Material Specifications

NU	PART NAME	MATERIAL
	Body	EN GJS 500 - Ductile Iron
	Cover	EN GJS 500 - Ductile Iron
	Standard	175 PSI



Dimensions

DN (mm)	D	H	L	R	WEIGHT
50	165	185	240	175	15
65	185	200	280	200	22
80	200	220	310	220	26
100	220	240	345	260	38
150	285	330	480	360	77
200	340	385	560	400	138