


## #1022 Arrow 25 Fluid Head

### Drag performance from HDV to ENG

The Arrow 25 is a new 100mm fluid head designed to support the latest generation in acquisition from the film-ready HDV alternatives to the lightweight ENG camcorders providing outstanding fluid drag performance. Arrow 25 features 5+5 selectable pan/tilt drag (plus '0') to provide repeatable light to heavy drag settings. Selectable 4 position counterbalance and 70mm sliding camera platform to balance a wide range of camera loads from 3.5-14kg makes the Arrow 25 one of the most versatile camera support platforms available.

### Counterbalance Performance

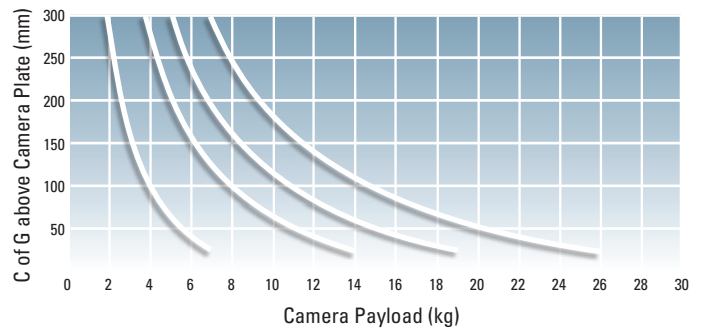

### Features

Payload range from 3.5–14kg

5 (plus zero) positions of fluid pan and tilt drag


4 positions of counterbalance

70mm Quick release sliding platform

100mm ball levelling

Rear mounted controls

White illumination of bubble level and indicators for pan and tilt



### Specifications

|                      |                                       |                             |                                                    |
|----------------------|---------------------------------------|-----------------------------|----------------------------------------------------|
| <b>Weight</b>        | 3.0 kg (6.6 lb)                       | <b>Counterbalance</b>       | 4 selectable positions                             |
| <b>Payload range</b> | 3.5-14 kg (7-30 lb)                   | <b>Camera platform</b>      | Quick release camera plate with 1/4" & 3/8" screws |
| <b>Pan drag</b>      | 5 selectable fluid drag positions + 0 | <b>Sliding range</b>        | 70 mm (+/- 35 mm)                                  |
| <b>Pan rotation</b>  | 360°                                  | <b>Height above bowl</b>    | 162 mm                                             |
| <b>Pan lock</b>      | Calliper disc brake system            | <b>Mounting base</b>        | 100 mm ball levelling                              |
| <b>Tilt drag</b>     | 5 selectable fluid drag positions + 0 | <b>Illuminated controls</b> | Bubble level & pan/tilt indicators                 |
| <b>Tilt angle</b>    | +/- 90°                               | <b>Temperature range</b>    | -40°C to +65°C                                     |
| <b>Tilt lock</b>     | Calliper disc brake system            | <b>Pan handle</b>           | Telescopic                                         |

## #1769

### Components:

|                                       |         |
|---------------------------------------|---------|
| Arrow 25 Fluid Head                   | (1022)  |
| Sprinter II Single Stage Alloy Tripod | (1589G) |
| Sprinter II Ground Spreader           | (470)   |
| Pan Handle with Handle Carrier        | (694)   |
| Arrow Softcase                        | (870)   |

### Specifications:

|                   |                            |
|-------------------|----------------------------|
| Weight*           | 10.45 kg (23.0 lb)         |
| Payload capacity: | 14 kg (30.8 lb)            |
| Payload range:    | 3.5-14 kg (7-30 lb)        |
| Transport length: | 1002 mm (39.4 in)          |
| Height range:     | 797-1587 mm (31.4-62.5 in) |



## #1770

### Components:

|                                       |        |
|---------------------------------------|--------|
| Arrow 25 Fluid Head                   | (1022) |
| Sprinter II Single Stage Alloy Tripod | (1589) |
| Sprinter/HD Mid Spreader              | (993)  |
| Sprinter/HD Tripod Rubber Feet        | (475)  |
| Pan Handle with Handle Carrier        | (694)  |
| Arrow Softcase                        | (870)  |

### Specifications:

|                   |                            |
|-------------------|----------------------------|
| Weight*           | 10.55 kg (23.2 lb)         |
| Payload capacity: | 14 kg (30.8 lb)            |
| Payload range:    | 3.5-14 kg (7-30 lb)        |
| Transport length: | 1002 mm (39.4 in)          |
| Height range:     | 832-1592 mm (32.8-62.8 in) |



## #1773

### Components:

|                                  |         |
|----------------------------------|---------|
| Arrow 25 Fluid Head              | (1022)  |
| Sprinter II 2 Stage Alloy Tripod | (1580G) |
| Sprinter II Ground Spreader      | (470)   |
| Pan Handle with Handle Carrier   | (694)   |
| Arrow Softcase                   | (872)   |

### Specifications:

|                   |                            |
|-------------------|----------------------------|
| Weight*           | 10.15 kg (22.3 lb)         |
| Payload capacity: | 14 kg (30.8 lb)            |
| Payload range:    | 3.5-14 kg (7-30 lb)        |
| Transport length: | 862 mm (33.9 in)           |
| Height range:     | 602-1692 mm (23.7-66.6 in) |



## #1774

### Components:

|                                  |        |
|----------------------------------|--------|
| Arrow 25 Fluid Head              | (1022) |
| Sprinter II 2 Stage Alloy Tripod | (1580) |
| Sprinter/HD Mid Spreader         | (993)  |
| Sprinter/HD Tripod Rubber Feet   | (475)  |
| Pan Handle with Handle Carrier   | (694)  |
| Arrow Softcase                   | (872)  |

### Specifications:

|                   |                            |
|-------------------|----------------------------|
| Weight*           | 10.45 kg (23.0 lb)         |
| Payload capacity: | 14 kg (30.8 lb)            |
| Payload range:    | 3.5-14 kg (7-30 lb)        |
| Transport length: | 862 mm (33.9 in)           |
| Height range:     | 602-1692 mm (23.7-66.6 in) |



## #1778

### Components:

|                                         |        |
|-----------------------------------------|--------|
| Arrow 25 Fluid Head                     | (1022) |
| Sprinter II 2 Stage Carbon Fibre Tripod | (1576) |
| Sprinter/HD Mid Spreader                | (993)  |
| Sprinter/HD Tripod Rubber Feet          | (475)  |
| Pan Handle with Handle Carrier          | (694)  |
| Arrow Softcase                          | (872)  |

### Specifications:

|                   |                            |
|-------------------|----------------------------|
| Weight*           | 9.85 kg (21.7 lb)          |
| Payload capacity: | 14 kg (30.8 lb)            |
| Payload range:    | 3.5-14 kg (7-30 lb)        |
| Transport length: | 862 mm (33.9 in)           |
| Height range:     | 602-1692 mm (23.7-66.6 in) |



## #1793

### Components:

|                                      |        |
|--------------------------------------|--------|
| Arrow 25 Fluid Head                  | (1022) |
| SOLO ENG 3 Stage Carbon Fibre Tripod | (1505) |
| Pan Handle with Handle Carrier       | (694)  |
| Solo Shoulder Strap                  | (1520) |
| Arrow Softcase                       | (872)  |

### Specifications:

|                   |                        |
|-------------------|------------------------|
| Weight*           | 9.1 kg (20.0 lb)       |
| Payload capacity: | 14 kg (30.8 lb)        |
| Payload range:    | 3.5-14 kg (7-30 lb)    |
| Transport length: | 820 mm (32.3 in)       |
| Height range:     | 382-2032 mm (15-80 in) |



## Optional

|                                |       |
|--------------------------------|-------|
| Pan handle with Handle Carrier | (694) |
| Studio Dolly                   | (480) |

|                                             |       |
|---------------------------------------------|-------|
| Studio Dolly with cable guards              | (481) |
| Studio Tracker Dolly with tracking & guards | (483) |

\*Weight includes softcase.