

Blackmagic 2110 IP SDI to HDMI 12G-10



Blackmagic 2110 IP SDI to HDMI 12G-10 converts 12G-SDI or SMPTE-2110 video to HDMI in a rack mount design. You get the highest quality conversion between all SD, HD and Ultra HD video standards with 3D LUTs for accurate calibration of HDMI displays. Blackmagic 2110 IP SDI to HDMI 12G-10 has 10 independent XLR audio outputs with remote level control and customizable delay for sync with TVs and projectors. Includes front panel LCD with video, meters and menus, speaker and headphone connector.

\$1,095

Connections

SDI Inputs

1

SDI Loop Outputs

1

SDI Rates

SD, 1.5G, 3G, 6G and 12G

HDMI 2.0 Video Outputs

1

SMPTE 2110 Input / Output

2 x 10G Ethernet

SMPTE ST 2110 IP Audio Inputs / Outputs

16 channels embedded input and output audio on ST-2110 IP video via 10G Ethernet.

SDI Audio Inputs

16 channels embedded audio.

SDI Audio Outputs

16 channels embedded audio.

HDMI Audio Inputs

8 channels embedded audio.

HDMI Audio Outputs

8 channels embedded audio.

Analog Audio Outputs

10 channels of professional balanced analog audio with 3-pin XLR connectors.
1 x 6.35 mm headphone jack.

Webcam Outputs


1 x USB-C up to 1080p60

Ethernet

Ethernet supports 10/100/1000/10G BASE-T for SMPTE 2110 IP video in and out, configuration and software updates.

Computer Interface

USB-C for webcam out, updates and configuration

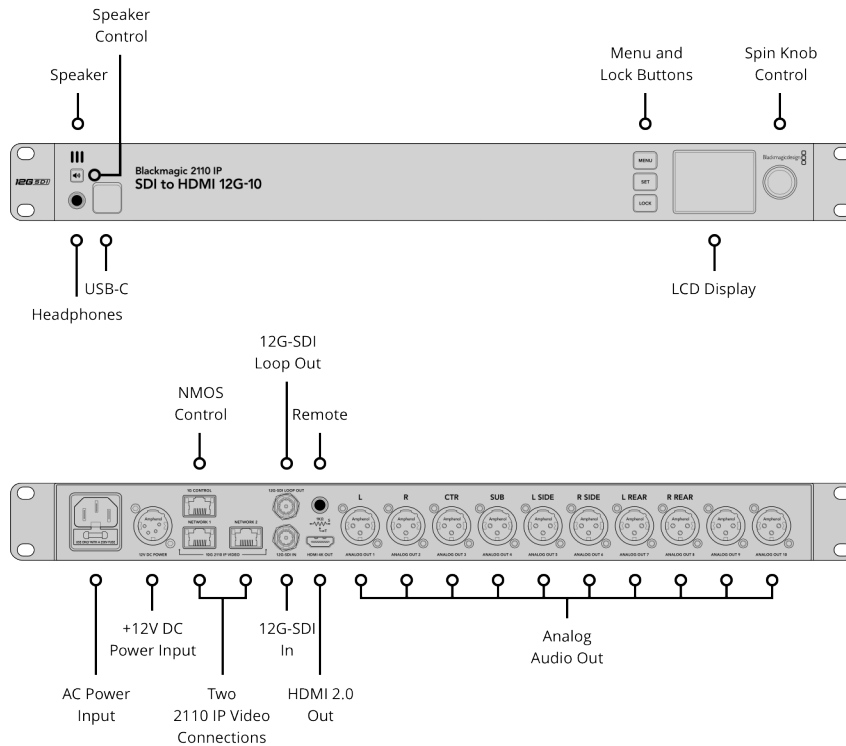

Video Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60
 1080i50, 1080i59.94, 1080i60
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p47.95,
 1080p48, 1080p50, 1080p59.94,
 1080p60,
 1080PsF23.98, 1080PsF24,
 1080PsF25, 1080PsF29.97, 1080PsF30

2K Video Standards

2Kp23.98 DCI, 2Kp24 DCI, 2Kp25 DCI,
 2Kp29.97 DCI, 2Kp30 DCI,
 2Kp47.95 DCI, 2Kp48 DCI, 2Kp50 DCI,
 2Kp59.94 DCI, 2Kp60 DCI,
 2KPsF23.98 DCI, 2KPsF24 DCI,
 2KPsF25 DCI, 2KPsF29.97 DCI,
 2KPsF30 DCI

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
 2160p29.97, 2160p30, 2160p47.95,
 2160p48, 2160p50, 2160p59.94,
 2160p60

4K Video Standards

4Kp23.98 DCI, 4Kp24 DCI, 4Kp25 DCI,
 4Kp29.97 DCI, 4Kp30 DCI,
 4Kp47.95 DCI, 4Kp48 DCI, 4Kp50 DCI,
 4Kp59.94 DCI, 4Kp60 DCI

SMPTE Compliance

SMPTE 259M, SMPTE 274M,
 SMPTE 292M, SMPTE 296M,
 SMPTE 424M, SMPTE 425M level A
 and B, SMPTE 2036-1, SMPTE 2048-1,
 SMPTE 2081-10, SMPTE 2081-11,
 SMPTE 2081-12, SMPTE 2082-10,
 SMPTE 2082-11, SMPTE 2082-12
 and SMPTE ST2108-1

SDI Metadata Support

RP 188/SMPTE 12M-2 and
 closed captioning.

Audio Sampling

Television standard sample rate of
 48 kHz and 24 bit.

Color Precision

8, 10 RGB 4:4:4 in all modes up to
 1080p30 and 8, 10-bit YUV 4:2:2 in
 all modes.

Color Space

Rec. 601, Rec. 709, Rec. 2020

HDMI HD Video Standards

720p50, 720p59.94, 720p60
 1080i50, 1080i59.94, 1080i60
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p47.95,
 1080p48, 1080p50, 1080p59.94,
 1080p60

HDMI Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
 2160p29.97, 2160p30, 2160p47.95,
 2160p48, 2160p50, 2160p59.94,
 2160p60

HDMI 4K Video Standards

4Kp23.98 DCI, 4Kp24 DCI, 4Kp25 DCI,
 4Kp29.97 DCI, 4Kp30 DCI,
 4Kp47.95 DCI, 4Kp48 DCI, 4Kp50 DCI,
 4Kp59.94 DCI and 4Kp60 DCI.

HDMI Color Precision

4:2:2

HDMI Color SpaceYUV

Audio**Local Audio Monitoring**

Front panel audio monitor speaker with speaker control button, plus 6.35 mm headphone socket.

IP Video Compliance**SMPTE 2110-20****(Uncompressed Video)**

IGMP v2

SMPTE 2110-21 (Traffic Shaping)

Sender: Narrow

Receiver: Narrow, Wide Synchronous, Asynchronous

SMPTE 2110-30 (PCM)

Audio Conformance level: Level C

SMPTE 2110-40 (Ancillary Data)

Full access to entire SMPTE ancillary data stream. Includes RP 188/SMPTE 12M-2, closed captioning and HDR static metadata.

Codec

Blackmagic IP10 codec used when converting 2160p59.94 and 2160p60 to 10G 2110 IP video.

Precision Time Protocol

IEEE 1588-2008 (PTP v2)

ST 2059-1

ST 2059-2

NMOS IS-04 Discovery and**Registration**

v1.3.2

Peer-to-peer via mDNS/DNS-SD

NMOS IS-05 Connection**Management**

v1.1.2

NMOS BCP-002-01

Natural Grouping

NMOS BCP-004-01Receiver capabilities

Control**Built in Control Panel**

Built in control panel including 4 buttons, spin knob control and 2.2 inch color display.

External Control

RJ-45 10Gb/s Ethernet and USB-C. REST API over Ethernet for external control via HTTP when used with REST client applications.

Displays

Built in 2.2 inch LCD for monitoring video, audio and status plus menu settings.

Operating Systems



Mac 13.0 Ventura,
Mac 14.0 Sonoma or later.



Windows 10 and 11.

Power Requirements

Power Supply

1 x Internal 100 - 240V AC 50/60Hz.

Power Supply

1 x IEC C14 socket for AC power.
1 x 4-pin XLR for +12V DC input for external power supply or battery use.

Power Usage

TBC

Physical Installation

1 rack unit.

Physical Specifications



Environmental Specifications

Operating Temperature

0° C to 40° C (32° - 104°F)

Storage Temperature

-20° to 45° C (-4° to 113° F)

Relative Humidity

0% to 90% non-condensing

What's Included

Blackmagic 2110 IP SDI to HDMI 12G-10
Welcome wallet with QR code for software download

Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller