

# Blackmagic Media Dock



**\$2,195**

Blackmagic Media Dock accelerates your post production workflow by enabling high speed network sharing and upload from up to 3 Blackmagic Media Modules from Blackmagic URSA Cine cameras. 4 x 10G Ethernet ports allow 4 separate edit stations to connect and edit directly. Blackmagic Media dock also has Ethernet over USB-C, dual AC power inputs for redundancy and an HDMI output for live monitoring of media in real time on a TV or monitor.

## Connections

### Interface

3 x removable and hot-swappable Blackmagic Media Modules.

### USB-C Port

1 x USB 3.0 (up to 5Gb/s). Supports Ethernet Over USB

### Computer Interface



USB-C or Ethernet for shared file access, configuration and software updates.

### 10G Ethernet Ports



4 x 10G BASE-T

### HDMI Monitor Outputs

1

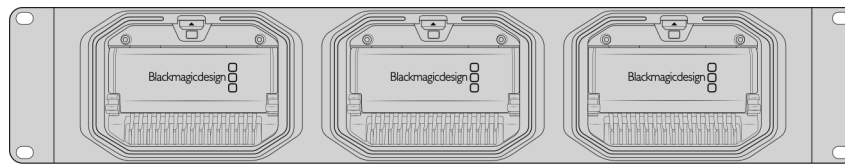

Blackmagic Media Module Bays

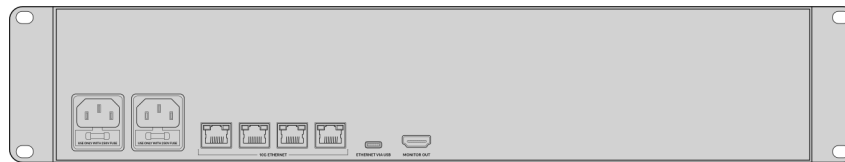

Dual AC Power Inputs

10G Ethernet

Ethernet via USB-C

HDMI Monitor Out

---

## File Sharing Protocol

### Protocol

NFS (HFS+ formatted disks only)  
SMB

### Computer Connections

50 max.

---

## Cloud Synchronization



**Blackmagic Cloud**

[Learn More](#)



Amazon Web Services S3 sync.

---

## Storage

### Storage Type

Up to 3 Blackmagic Media Modules.

### External Storage Format

Blackmagic (formatted in camera)

---

## Displays

### HDMI Monitor Out Standards

1080p50, 1080p59.94, 1080p60

### Monitor Out Displays

Device Name, storage capacity and use, Cloud Sync status, User Activity, Hardware Status, storage map, network data rate graph.

### Status Indicator

LED bezel indicator lights around media module bays.

---

## Device Control

### External Control

USB-C or Ethernet for configuration and software updates.

---

## Software

### Software Included

Blackmagic Cloud Setup Utility

Blackmagic Proxy Generator Lite

Internal software upgrade via Blackmagic Cloud Setup using USB-C port

---

---

## Operating Systems



Mac 15.0 Sequoia,  
Mac 26.0 Tahoe or later.



Windows 10, 64-bit.  
Windows 11.

---

## Power Requirements

### Power Supply

Internal 100 - 240V AC 50/60Hz with IEC C14 mains input.

### Power Usage

95 W


---

## Physical Installation

2 rack units.

---

## Physical Specifications

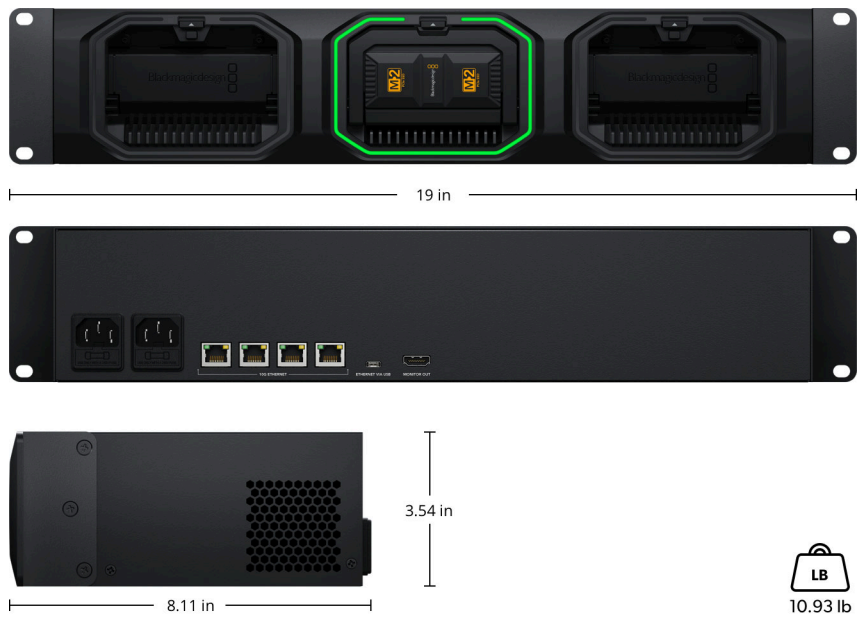

---

## Environmental Specifications

### **Operating Temperature**

0° to 40° C (32°to 104° F)

### **Storage Temperature**

-20° to 60° C (-4° to 140° F)

### **Relative Humidity**

0% to 90% non-condensing

---

## What's Included

Blackmagic Media Dock

Welcome wallet with QR code for software download

---

## Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller