

Blackmagic Media Dock Ultra



Blackmagic Media Dock Ultra accelerates your post production workflow by enabling incredibly high speed network sharing and upload from up to 3 Blackmagic Media Modules from Blackmagic URSA Cine cameras. 2 x 100G Ethernet ports allow multiple edit stations to connect and edit directly. Blackmagic Media Dock Ultra also has dual AC power inputs for redundancy and 2 x SDI and an HDMI output for live monitoring of media in real time on a TV or monitor.

\$3,295

Connections

100G Ethernet

2 x 100G QSFP28 connections.
Each 100G port can be assigned an independent IP address and subnet mask for up to 200G bandwidth and load balancing when used with a managed switch.

[Please click here to view supported QSFP28 modules.](#)

1G Management

1 x RJ45 Ethernet. Supports 10/100/1000 BASE-T. For Cloud Store Setup utility and software updates.

SDI Monitor Outputs

2

HDMI Monitor Outputs

1

SDI Rates


1.5G, 3G.

Computer Interface



1 x USB-C for Cloud Store Setup utility and software updates.

Power

2 x IEC C14 power inputs.

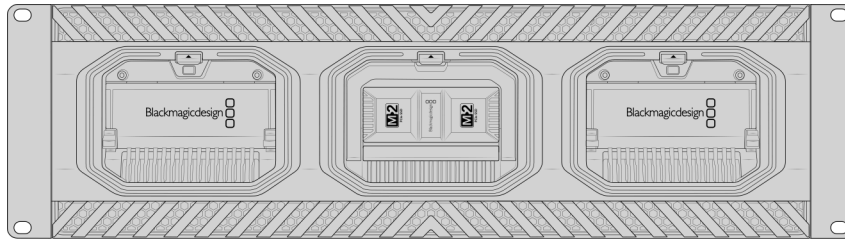

Blackmagic Media Module Bays

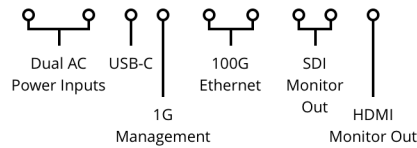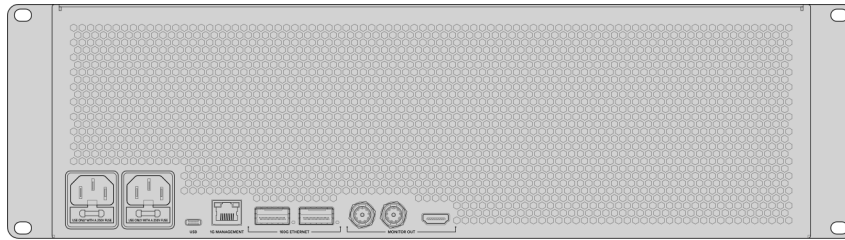

File Sharing Protocol

Protocol

NFS (HFS+ formatted disks only)
SMB

Computer Connections

50 max.

Cloud Synchronization



Blackmagic Cloud

[Learn More](#)



Amazon Web Services S3 sync.

Storage

Storage Type

Up to 3 Blackmagic Media Modules.

External Storage Format

Blackmagic (formatted in camera)

Displays

Status Indicator

LED bezel indicator lights around media module bays.

Monitor Out Displays

Device Name, storage capacity and use, Cloud Sync status, User Activity, Hardware Status, storage map, network data rate graph.

SDI Monitor Out Standards

1080p50, 1080p59.94, 1080p60

HDMI Monitor Out Standards

1080p50, 1080p59.94, 1080p60

Device Control

External Control

USB-C or Ethernet for configuration and software updates.

Software

Software Included

Blackmagic Cloud Setup Utility

Blackmagic Proxy Generator Lite

Internal software upgrade via Blackmagic Cloud Setup using USB-C port

Operating Systems



Mac 15.0 Sequoia,
Mac 26.0 Tahoe or later.



Windows 10, 64-bit.
Windows 11.

Power Requirements

Power Supply

2 x 100 - 240V AC 50/60Hz internal power supplies.

Power Inputs

2 x IEC C14 sockets.


Power Usage

TBC

Physical Installation

3 rack units.

Physical Specifications

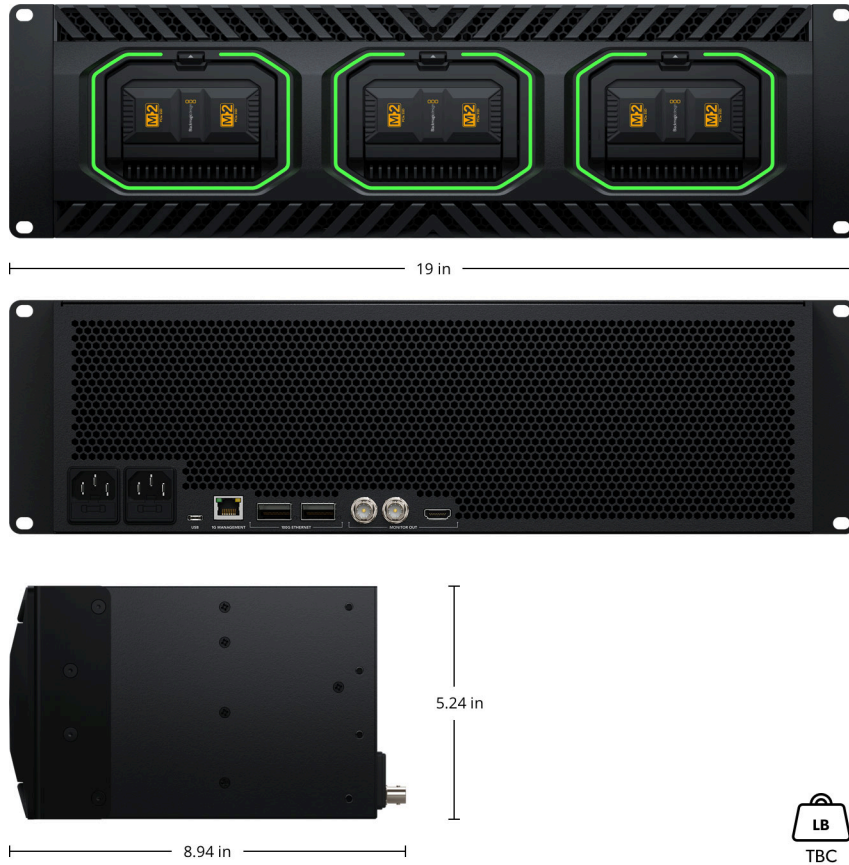

Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

0% to 90% non-condensing

What's Included

Blackmagic Media Dock Ultra

Welcome wallet with QR code for software download

Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller