

Blackmagic StudioBridge 100G



The Blackmagic StudioBridge 100G bridges a single 100G Ethernet SMPTE-2110 connection into a redundant dual 100G Ethernet broadcast system. It also has two 100G Ethernet camera connections that can be combined if total bandwidth doesn't exceed 100 Gb/s! This lets you interface two cameras such as the URSA Cine 12K 100G into a redundant broadcast system. It also includes a separate 10G Ethernet channel for accessories, an NMOS control port, and dual redundant power supplies.

\$2,745

Connections

100G 2110 IP Networks

2 x 100G QSFP28 Network connections.
Supports ST 2022-7 redundant delivery of IP streams over the two '100G 2110 IP Video' network connections.

100G 2110 IP Camera

2 x 100G QSFP28 Camera connections.

Senders and Receivers per 100G Pair

1 x 100G URSA Cine or
2 x URSA Cine Immersive / URSA Immersive.

10G 2110 IP Networks

2 x 10G SFP optical fiber connections.
2 x 10G RJ45 connections.

Senders and Receivers per 100G Pair

8 x Ultra HD or HD.

1G Control Network

1 x 1G RJ45 for NMOS control, configuration and software updates.

SMPTE ST 2110 IP Audio Inputs

16 Ch embedded audio on each 2110 IP video stream over 100G and 10G Ethernet.

SMPTE ST 2110 IP Audio Outputs

16 Ch embedded audio on each 2110 IP video stream over 100G and 10G Ethernet.

Multi Rate Support


Auto detection of HD, Ultra HD and 4K.

Computer Interface

1 x USB-C for configuration and firmware updates.

Power

2 x IEC C14 power inputs.

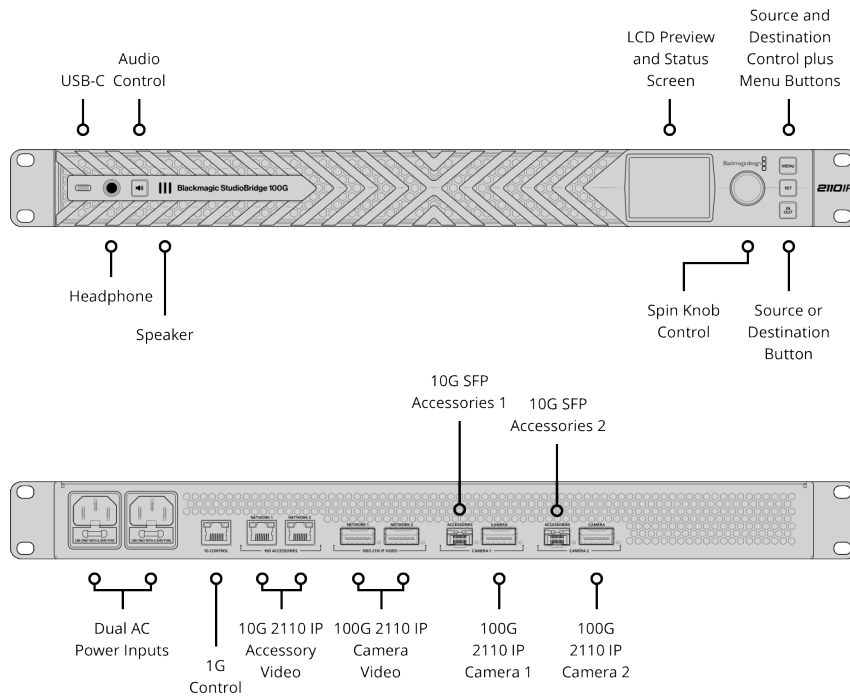

Video Standards

HD Video Standards

720p50, 720p59.94, 720p60
 1080i50, 1080i59.94, 1080i60
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60
 1080PsF25, 1080PsF29.97, 1080PsF30

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
 2160p29.97, 2160p30, 2160p50,
 2160p59.94, 2160p60

8K Video Standards

8160 x 7200 x 2 stereo immersive

SMPT E Compliance

SMPT E 2110-20, SMPT E 2110-21,
 SMPT E 2110-30, SMPT E 2110-40,
 SMPT E 2022-7

Color Precision

10-bit 4:2:2 YUV

Color Space

Rec. 709, Rec. 2020.

SDI Auto Switching

Automatically detects HD and Ultra HD.

IP Video Compliance

SMPT E 2110-20

(Uncompressed Video)

IGMP v2

SMPT E 2110-21 (Traffic Shaping)

Sender: Narrow

Receiver: Narrow, Wide Synchronous,
 Asynchronous

SMPT E 2110-30 (PCM)

Audio Conformance level: Level C

SMPT E 2110-40 (Ancillary Data)

Full access to entire SMPT E ancillary data stream. Includes RP 188/SMPT E 12M-2, closed captioning and HDR static metadata.

Codec

Blackmagic IP10 codec optional for 2160p59.94 and 2160p60 as 2110 IP video.

Precision Time Protocol

IEEE 1588-2008 (PTP v2)

ST 2059-1

ST 2059-2

NMOS IS-04 Discovery and

Registration

v1.3.2

Peer-to-peer via mDNS/DNS-SD

NMOS IS-05 Connection

Management

v1.1.2

NMOS BCP-002-01

Natural Grouping

NMOS BCP-004-01Receiver capabilities

Displays

Display

Built in 2.2 inch LCD for monitoring video, audio, video standard and timecode plus menu settings. Use search dial to scrub between all available inputs and monitor on front panel.

Control

Built in Control Panel

2.2 inch color display, 3 button control panel and spin knob for source and destination setup and menu settings.

External Control

RJ-45 Ethernet and USB-C.

Operating Systems



Mac 15.0 Sequoia,
Mac 26.0 Tahoe or later.



Windows 11

Power Requirements

Power Supply

2 x 100 - 240V AC 50/60Hz internal power supplies.

Power Inputs

2 x IEC C14 sockets.


Power Usage

TBC

Physical Installation

1 rack unit.

Physical Specifications

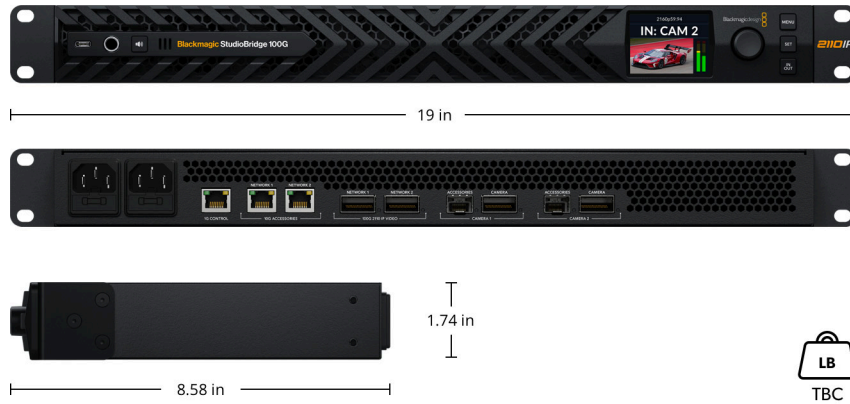

Environmental Specifications

Operating Temperature

5° to 40° C (41° to 104° F)

Storage Temperature

-20° to 45° C (-4° to 113° F)

Relative Humidity

0% to 90% non-condensing

What's Included

Blackmagic StudioBridge 100G

Welcome wallet with QR code for software download

Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller