

Blackmagic URSA Cine Studio Viewfinder



Blackmagic URSA Cine Studio Viewfinder is a large 7" HDR touchscreen viewfinder with full camera control, designed for use with URSA Cine in live production environments. It combines a high brightness HDR touchscreen with custom function buttons and physical knobs for brightness, contrast and focus peaking. On screen overlays include focus peaking, frame guides, histograms and more, with full touchscreen access to all camera settings. Includes removable sunshade and connects via a single USB-C cable for video, power and camera control.

\$1,645

Connections

USB-C with Locking Connector

Video, power, metadata, camera control and software updates.

Screen Dimensions

7" 1920 x 1200 resolution.

Screen Type


7" high brightness TFT LCD

Screen Brightness

2000 nits

Power

5.5mm locking barrel socket supports +12V to +17V DC power.

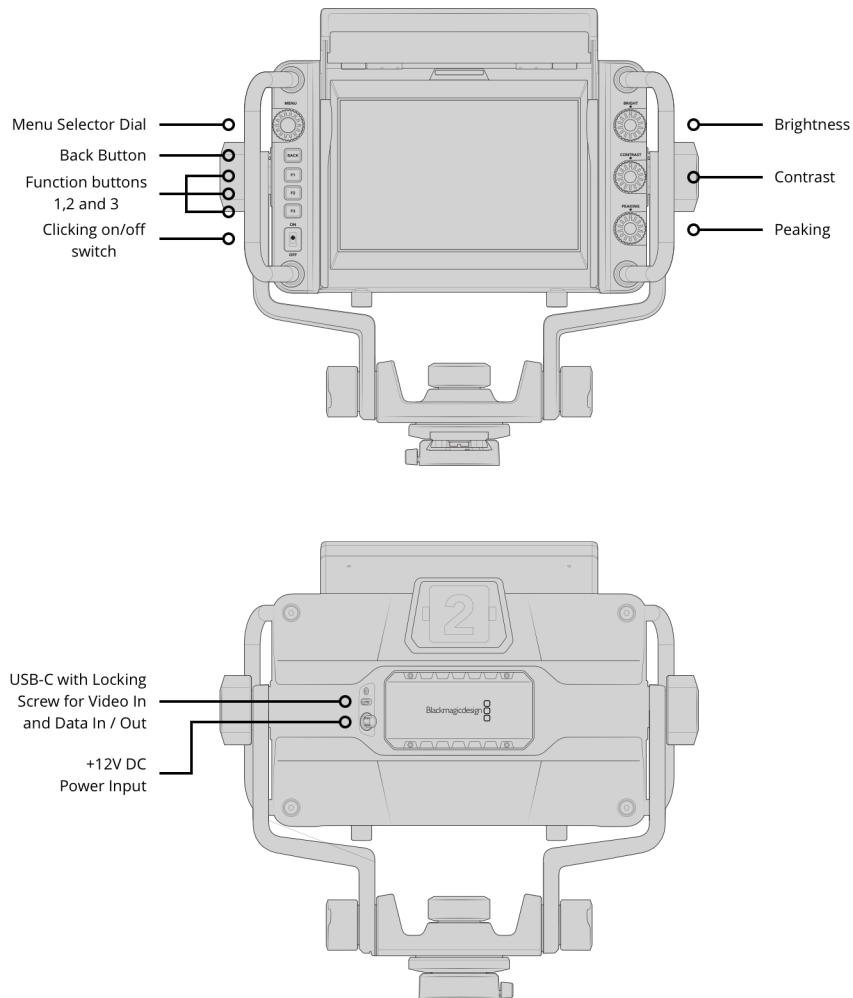

Features

Display Size

7 inch.

Display Resolution

1920px x 1200px.

Display Type

LCD capacitive touchscreen.

Display Brightness

2000 nits.

Frame Rates

Up to 60fps.

Handles

Built in grab handles for positioning the monitor independently from the camera.

Position Adjustment Options

Articulated yoke with variable tension pivots and grab handles for forward, backward, up, down, pan and tilt adjustments.

Sunshade

Detachable and foldable sunshade

Mounting Options

Quick release V-lock mounting bracket for attaching viewfinder to URSA Cine 12K body.

Tally

Large talent facing LED tally light with customizable perspex camera numbers.

Metadata Support

Viewfinder supports all camera metadata and full Blackmagic OS camera control.

Control

Controls

Touch screen with heads up display and full camera control,
Push button dial for settings and navigating menus,
Customizable short cut function buttons,
Dedicated brightness, contrast and peaking knobs.

On Screen Controls

Tap screen to control Monitor
Overlays, Frame Rate, Shutter, Iris,
Timecode, ISO, White Balance, Tint,
Power, Record Start/Stop, Media,
Audio, Focus Zoom, Digital Slate and camera menus.

Button Controls

Includes F1, F2, F3 assignable function buttons to recall preset parameters or toggle functions plus BACK button.

Function Button Toggle

Clean Feed
Status Text
Display LUT
Frame Guides
Focus Assist
False Color
Zebra
Grid
Safe Area Guide
Off Speed Rec
Focus Zoom
Focus
Record
Auto White Balance
Color Bars
Playback
False Color + Zebra
OIS
Stream
Still

Mounting

Mounting

Includes quick release VLock bracket, attaches to mounting surfaces using 2 x 1/4-20 screws.

Compatible Cameras

Blackmagic URSA Cine 12K LF 100G
Blackmagic URSA Cine 12K LF
Blackmagic URSA Cine 17K 65
Blackmagic URSA Cine Immersive 100G
Blackmagic URSA Cine Immersive

Operating Systems



Mac 15.0 Sequoia,
Mac 26.0 Tahoe or later.



Windows 11

Power Requirements

Powered over USB-C.
An additional +12V DC input
allows for supplementary power
when USB-C power
is insufficient.

Power Input

USB-C via Blackmagic camera
Viewfinder connections.
5.5mm barrel connector with locking
thread supports +12V to +17V DC
power input range.

Power Usage

TBA

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 40°C (32° to 104°F)

Storage Temperature

-20° to 60°C (-4° to 140°F)

Relative Humidity

0% to 90% non-condensing

What's Included

Blackmagic URSA Cine Studio Viewfinder
Monitor Mounting Plate
Welcome wallet with QR code for software download

Warranty

Product Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller