


DeckLink SDI Micro



Miniature M.2 card with 3G-SDI connections for simultaneous capture and playback in all SD and HD formats up to 1080p60. DeckLink SDI Micro also includes Black Burst and Tri-Sync reference input and its miniature size makes it great for use on portable solutions which are based on compact computers!

\$139

Connections

M.2

M.2 PCI Express 1 lane generation 3, compatible with B and M key type 2260 and 2280.

Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60
1080PsF23.98, 1080PsF24,
1080PsF25, 1080PsF29.97, 1080PsF30
1080i50, 1080i59.94, 1080i60

SDI Video Sampling

4:2:2, 4:4:4


SDI Color Precision

8, 10, 12-bit RGB 4:4:4 in all modes up to 1080p30 and 8, 10-bit YUV 4:2:2 in all modes.

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 424M, SMPTE 425M level A and B, ITU-R BT.656 and ITU-R BT.601.

Available Accessories

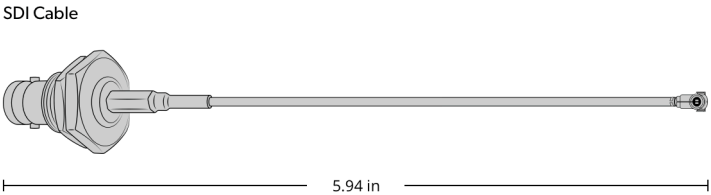


Part Numbers

DeckLink SDI Micro, order code: BDLKMICROSDI

SDI Cable, order code: CABLE-BDLKMIR/SDI

Physical Specifications

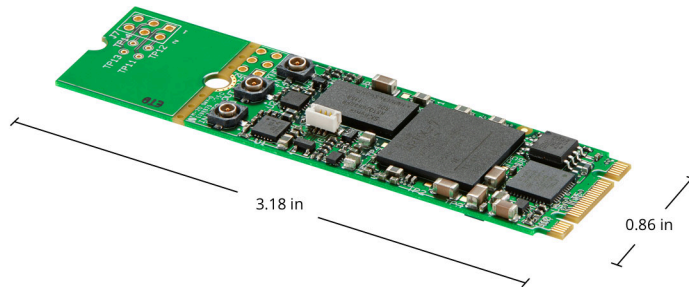

Operating Systems



Mac 12.0 Monterey,
Mac 13.0 Ventura or later.



Windows 10, 64-bit.
Windows 11.



Linux

Power Requirements

Power Consumption

4.03 W (max)

Environmental Specifications

Operating Temperature

0°C to 50°C (32°F to 122°F)

Storage Temperature

-40°C to 75°C (-40°F to 167°F)

Relative Humidity

0% to 90% non-condensing

What's Included

DeckLink SDI Micro

Fan and Heat Sink assembly

Warranty

3 Year Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller