Libec QD-30M System with mid-level spreader

System	QH3 (Head) + T150B (Tripod) + BR-6B (Mid-level spreader) + FP-6B (Large rubber feet)		
Payload	69 kg / 152.1 lb	Tilt angle	+90° / -70° (Limited to ±40° with maximum counterbalance)
Weight	21.4 kg / 47.1 lb	Pan angle	360°
Height	① H : 1860 mm W : 685 mm (※Reference)	Counterbalance	Range : 28 ~ 65 kg / 61.7 ~ 143.3 lb (C.G.125 mm)
	② H : 975 mm W : 830 mm (〃)		System : Continuous
Folded length	③ L : 1025 mm (〃)	Drag mode	7 STEP
Camera plate (Sliding range)	Sliding plate	Temperature range	-20 ℃ ~ +60 ℃ / -4 ℉ ~ +140 ℉
	±75 mm / ±2.9″	Ball diameter	φ150 mm
Plate attachment	3/8-16UNC × 2	Section	2 STAGE (Material : Aluminum)
	---	Tripod fixation	Fixing lock knob
Spare screw	3/8-16UNC × 2	Spreader	BR-6B (Telescopic , Removable)
	---	Pan handle	PH-15B × 2

Remarks

Outside diameter of pipe

Upper : φ24 / Middle : φ24 / Lower : φ20

■Exterior Dimensions (mm)

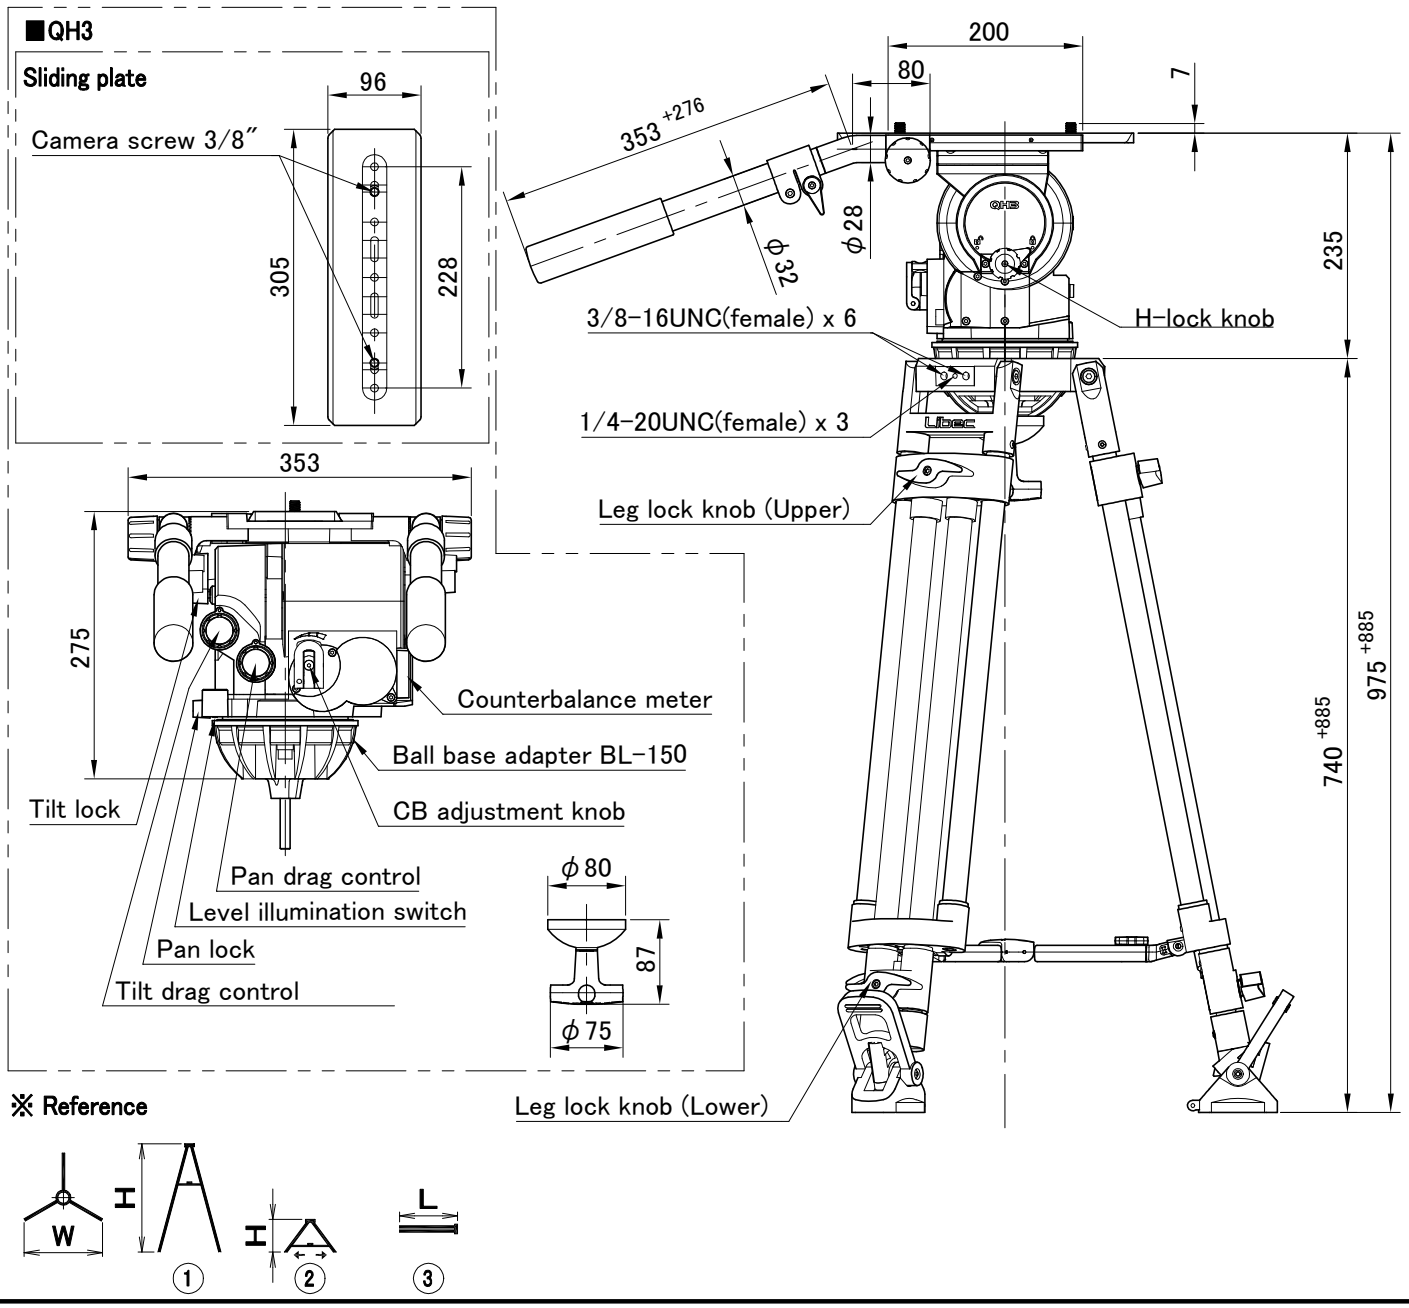

※ Reference

Manufacturer : HEIWA SEIKI KOGYO CO., LTD.

978-1, Nishibukuro, Yashio-City, Saitama, 340-0833 Japan TEL . +81-48-995-1301 FAX . +81-48-997-0804 http://www.libec-global.com

2109

DWG.NO. : 50-00095-E