


Key Benefits:


- ✓ 4 rows staggered printheads layout
- ✓ Combine different Epson printheads: i-1600U1/i-3200U1/i-3200HD
- ✓ 4 or 8 color/ golden/silver stamping options
- ✓ Primer, white, color, varnish in one pass
- ✓ Substrate up to 7.1 inches thickness
- ✓ Upgradable visual scanning system
- ✓ UV DTF compatible
- ✓ Access frequent functions on LED
- ✓ One piece sturdy machine frame


ENDLESS OPTIONS
2 YEAR LIMITED WARRANTY*
PRINTERABLE SIZE: 3FTx 2 FT


Sample Head Layout:




3pcs printheads gold stamping
W+CMYK+V1(bright light)
+V2(gold stamping)

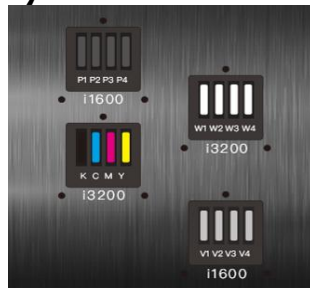

4pcs printheads
P+W+CMYK+V

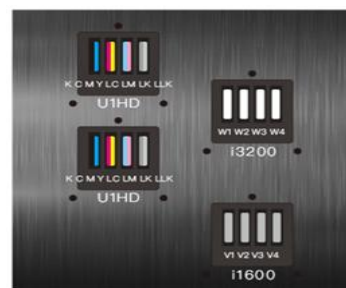

4pcs printheads 8 colors
KCMYLCmLmLkLk+W
+KCMYLCmLmLkLk+V

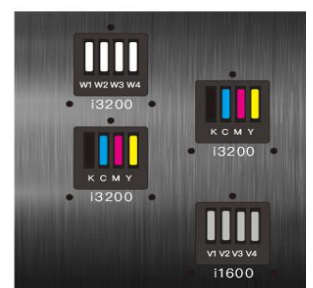


4pcs printheads
W+CMYK+CMYK+V

Cylindrical / Curvature Objects:



Vision Scanning System

- ✓ High resolution up to 1200dpi
- ✓ High precision < +/- 0.004 inches
- ✓ Improved Productivity
- ✓ No jigs on multiple objects

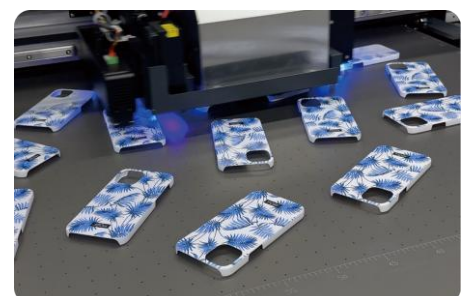

*See the details in the Product Warranty Statement



I Machine Specifications:

Number of printheads	2-4 pcs Epson printheads I1600U1, i3200U1, or i3200HD
Z Height	Adjustable up to 7.1 inches
Printable Area	35.4" X 23.6"
Print Resolutions	720 X 1200 dpi (4 passes) 720 X 1800 dpi (6 passes) 720 X 2400 dpi (8 passes)
Throughput in production mode 720X1800dpi	170 square feet per hour (4 printheads) 85 square feet per hour (3 printheads)
UV Lamp	3 UV Lamps per Machine, Air Cooling
Head Height	Automatic Head Height Adjustment
Head Clean	Automatic Clean; Wiper moves parallel to the printhead channels
Vacuum Table	Vacuum Suction Table via Fans or pump
Cylindrical Size	1 ¾" - 4 1/3" Diameter
Power	110V or 220V, 50HZ/60HZ
Operating System	Windows 11
Printer Connectivity	Ethernet
RIP Software	FlexiPRINT, RIIN
Operating Environment	Temperature:20-25°C Humidity:40%-60%
Dimensions (L X W X H)	Printer: 79" X 51" X 47" Packaged: 85" X 61" X 41"
Weight	Printer: 500lbs Packaged: 935lbs

